
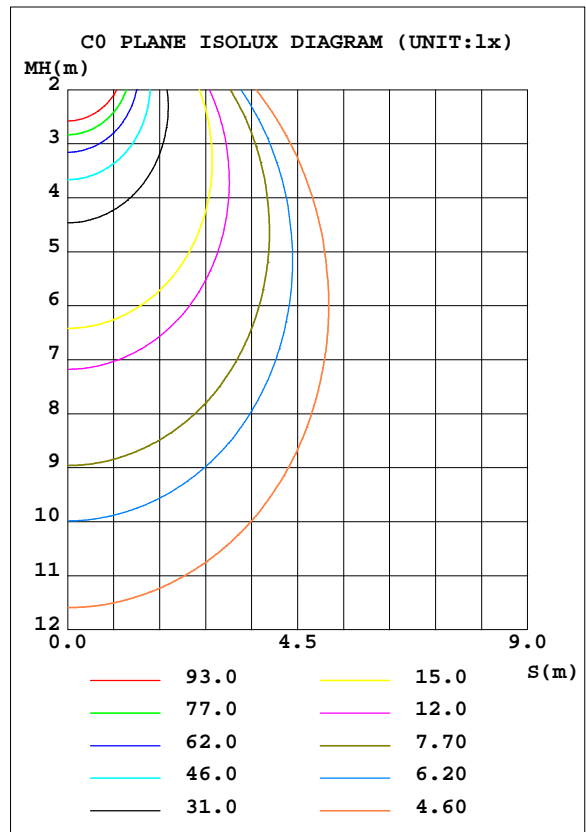


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.50V I:0.0750A P:14.400W PF:0.8860 Freq:50.00Hz		
Lamp Flux:1425.25x1 lm		
Name: NS11-φ140MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H55mm	
	SUR.: D100mm	

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax(cd)	618.1	S/MH(C0/180)	1.15
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.16
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1425.3	η UP, DN(C0-180)	1.2,49.2
NOMINAL FLUX(lm)	1425.25	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3,48.3
LAMPS INSIDE	1	η up(%)	2.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.4	CIBSE SHR MAX	1.30

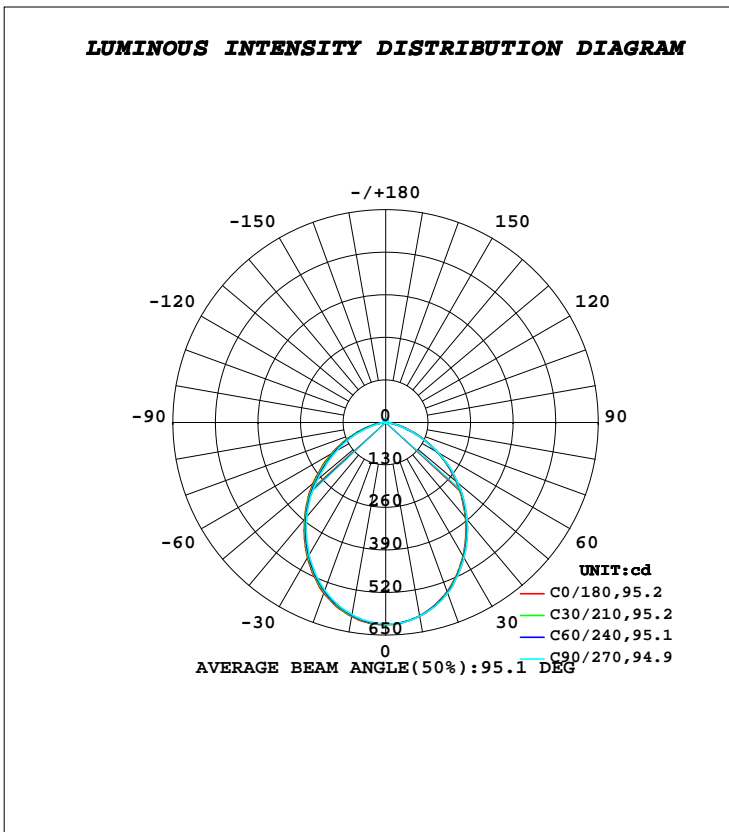

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp	
10	599.7	600.6	601.3	602.1	602.0	598.8	596.0	596.7	0- 10	58.07	58.07	4.07,4.07	
20	549.7	552.8	554.7	555.4	554.5	549.7	545.4	546.0	10- 20	163.0	221.1	15.5,15.5	
30	472.0	476.2	478.7	479.1	477.6	472.4	467.7	468.3	20- 30	236.9	458.0	32.1,32.1	
40	379.3	384.6	387.6	387.6	385.6	380.0	375.1	375.6	30- 40	268.1	726.1	50.9,50.9	
50	281.3	286.0	289.1	290.9	289.7	279.9	271.1	273.0	40- 50	256.9	983.0	69,69	
60	183.8	184.2	185.6	189.8	191.6	181.9	172.7	174.9	50- 60	207.6	1191	83.5,83.5	
70	93.85	87.93	86.69	94.28	100.6	91.30	81.80	84.40	60- 70	133.8	1324	92.9,92.9	
80	21.22	18.79	18.82	23.53	27.54	23.53	18.81	18.78	70- 80	55.38	1380	96.8,96.8	
90	2.220	2.072	2.207	2.849	3.468	3.480	3.239	2.817	80- 90	9.153	1389	97.4,97.4	
100	2.919	2.715	2.768	3.255	3.774	3.954	3.912	3.541	90-100	3.288	1392	97.7,97.7	
110	4.028	3.803	3.839	4.313	4.822	4.990	4.946	4.603	100-110	4.090	1396	98,98	
120	5.275	4.991	5.001	5.505	6.047	6.186	6.114	5.795	110-120	4.973	1401	98.3,98.3	
130	6.486	6.243	6.263	6.730	7.222	7.315	7.219	6.933	120-130	5.571	1407	98.7,98.7	
140	7.462	7.266	7.299	7.726	8.165	8.226	8.117	7.857	130-140	5.641	1412	99.1,99.1	
150	8.239	8.182	8.248	8.531	8.812	8.868	8.799	8.580	140-150	5.128	1418	99.5,99.5	
160	8.884	8.934	9.011	9.137	9.255	9.327	9.322	9.159	150-160	4.090	1422	99.7,99.7	
170	9.526	9.523	9.549	9.633	9.703	9.663	9.598	9.559	160-170	2.650	1424	99.9,99.9	
180	9.944	9.848	9.816	9.901	9.979	9.885	9.789	9.829	170-180	0.9275	1425	100,100	
DEG	LUMINOUS INTENSITY:cd									UNIT:lm			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.50V I:0.0750A P:14.400W PF:0.8860 Freq:50.00Hz		
Lamp Flux:1425.25x1 lm		
Name: NS11-φ140MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H55mm	
	SUR.: D100mm	

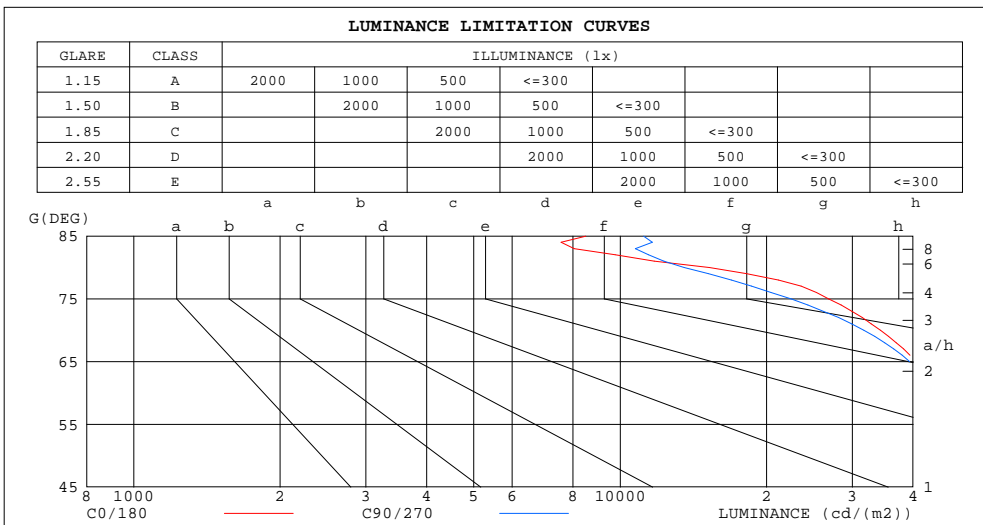

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8497	11180
80	15278	13547
75	26820	22488
70	34301	31682
65	40640	39390
60	45940	46399
55	50609	52018
50	54697	56217
45	58267	59964


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.50V I:0.0750A P:14.400W PF:0.8860 Freq:50.00Hz		
Lamp Flux:1425.25x1 lm		
Name: NS11-φ140MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H55mm	
	SUR.: D100mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.05	1.02	.98	1.03	.99	.96	.98	.95	.93	.94	.92	.90	.90	.88	.87	.84
2.0	.93	.87	.82	.91	.85	.81	.87	.82	.78	.84	.80	.76	.80	.77	.74	.72
3.0	.83	.75	.69	.81	.74	.68	.78	.72	.67	.75	.70	.65	.72	.68	.64	.62
4.0	.74	.66	.59	.72	.65	.59	.70	.63	.58	.67	.61	.57	.65	.60	.56	.54
5.0	.66	.58	.52	.65	.57	.51	.63	.56	.51	.61	.55	.50	.59	.53	.49	.47
6.0	.60	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.53	.48	.44	.42
7.0	.55	.46	.41	.54	.46	.40	.52	.45	.40	.50	.44	.39	.49	.43	.39	.37
8.0	.50	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.36	.45	.39	.35	.33
9.0	.46	.38	.33	.45	.38	.33	.44	.37	.33	.43	.37	.32	.42	.36	.32	.30
10.0	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.39	.33	.29	.27

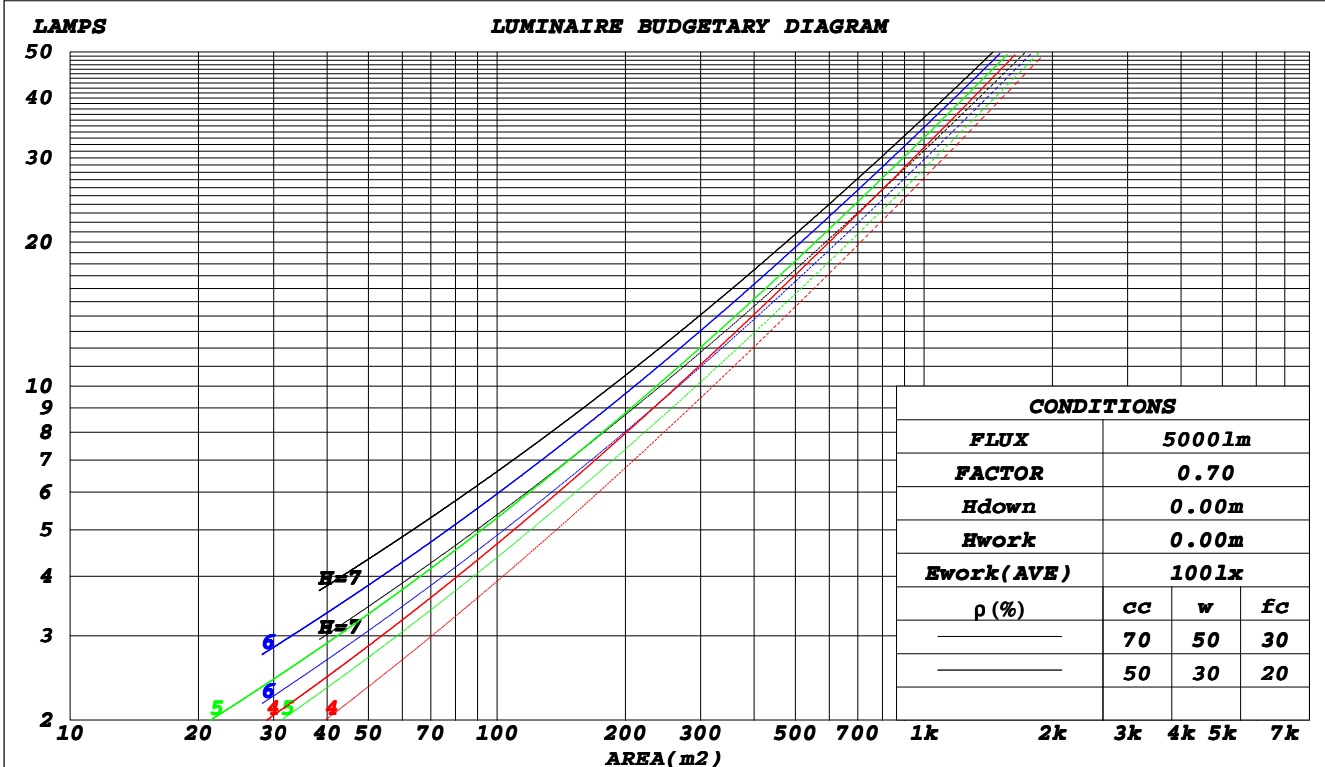

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.50V I:0.0750A P:14.400W PF:0.8860 Freq:50.00Hz		
Lamp Flux:1425.25x1 lm		
Name: NS11-φ140MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H55mm	
	SUR.: D100mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.271	.154	.049	.263	.150	.048	.248	.142	.045	.235	.135	.043	.223	.129	.042	
2.0	.261	.143	.044	.254	.140	.043	.241	.134	.042	.229	.129	.040	.219	.124	.039	
3.0	.245	.131	.039	.239	.128	.039	.228	.124	.038	.218	.119	.037	.208	.115	.036	
4.0	.229	.119	.035	.224	.117	.035	.214	.113	.034	.205	.110	.033	.196	.106	.032	
5.0	.214	.109	.032	.209	.107	.031	.200	.104	.031	.192	.101	.030	.184	.098	.030	
6.0	.200	.100	.029	.196	.099	.028	.188	.096	.028	.180	.094	.028	.173	.091	.027	
7.0	.187	.093	.026	.184	.091	.026	.176	.089	.026	.170	.087	.025	.163	.085	.025	
8.0	.176	.086	.024	.173	.085	.024	.166	.083	.024	.160	.081	.023	.154	.079	.023	
9.0	.166	.080	.022	.163	.079	.022	.157	.077	.022	.151	.076	.022	.146	.074	.021	
10.0	.156	.075	.021	.154	.074	.021	.148	.073	.020	.143	.071	.020	.138	.070	.020	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.210	.210	.210	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.197	.176	.157	.169	.151	.135	.115	.104	.093	.066	.060	.054	.021	.019	.018	
2.0	.188	.152	.121	.161	.131	.105	.110	.090	.073	.064	.053	.043	.020	.017	.014	
3.0	.180	.134	.098	.154	.116	.085	.106	.080	.059	.061	.047	.035	.020	.015	.011	
4.0	.172	.120	.081	.147	.104	.071	.101	.073	.050	.059	.042	.029	.019	.014	.010	
5.0	.165	.110	.070	.141	.095	.061	.097	.066	.043	.056	.039	.025	.018	.013	.008	
6.0	.158	.101	.061	.136	.088	.053	.094	.062	.038	.054	.036	.022	.018	.012	.007	
7.0	.151	.095	.055	.130	.082	.048	.090	.057	.034	.052	.034	.020	.017	.011	.007	
8.0	.145	.089	.050	.125	.077	.044	.086	.054	.031	.050	.032	.018	.016	.010	.006	
9.0	.139	.084	.046	.120	.073	.040	.083	.051	.029	.048	.030	.017	.016	.010	.006	
10.0	.134	.080	.043	.115	.069	.038	.080	.049	.027	.047	.029	.016	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.50V I:0.0750A P:14.400W PF:0.8860 Freq:50.00Hz		
Lamp Flux:1425.25x1 lm		
Name: NS11-φ140MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H55mm	
	SUR.: D100mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.1	27.5	26.4	27.7	28.0	26.2	27.6	26.5	27.8	28.1
3H	27.1	28.3	27.4	28.6	28.9	27.0	28.3	27.4	28.6	28.9
4H	27.3	28.5	27.7	28.8	29.1	27.2	28.4	27.6	28.7	29.0
6H	27.4	28.6	27.8	28.9	29.2	27.3	28.4	27.6	28.7	29.0
8H	27.4	28.5	27.8	28.8	29.1	27.2	28.3	27.6	28.6	29.0
12H	27.4	28.4	27.7	28.7	29.1	27.2	28.2	27.6	28.6	28.9
4H 2H	26.5	27.7	26.9	28.0	28.3	26.6	27.8	26.9	28.1	28.4
3H	27.6	28.7	28.0	29.0	29.3	27.6	28.6	27.9	28.9	29.3
4H	28.0	28.9	28.4	29.3	29.6	27.8	28.8	28.2	29.1	29.5
6H	28.1	28.9	28.5	29.3	29.7	27.9	28.7	28.3	29.1	29.5
8H	28.1	28.8	28.5	29.2	29.7	27.9	28.7	28.3	29.1	29.5
12H	28.0	28.7	28.5	29.2	29.6	27.9	28.6	28.3	29.0	29.5
8H 4H	28.0	28.8	28.4	29.2	29.6	27.9	28.6	28.3	29.1	29.5
6H	28.2	28.8	28.6	29.3	29.7	28.0	28.6	28.5	29.1	29.5
8H	28.2	28.7	28.7	29.2	29.7	28.0	28.6	28.5	29.0	29.5
12H	28.2	28.6	28.7	29.1	29.7	28.0	28.5	28.5	29.0	29.5
12H 4H	28.0	28.7	28.4	29.1	29.5	27.8	28.5	28.3	29.0	29.4
6H	28.1	28.7	28.6	29.2	29.7	28.0	28.5	28.5	29.0	29.5
8H	28.1	28.6	28.7	29.1	29.6	28.0	28.5	28.5	29.0	29.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.5 / - 0.5					+ 0.6 / - 0.6				

CIE Pub.117, 1425 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.2)
 Area: 0.008 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.50V I:0.0750A P:14.400W PF:0.8860 Freq:50.00Hz Lamp Flux:1425.25x1 lm		
Name: NS11-φ140MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H55mm	
	SUR.: D100mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	61	50	44	60	50	43	59	49	43	37
0.80	71	60	54	70	60	53	68	59	53	46
1.00	79	69	63	78	69	62	76	69	61	55
1.25	86	77	70	85	76	70	82	74	69	62
1.50	91	82	76	89	81	75	86	79	74	67
2.00	97	90	84	95	88	83	92	86	81	73
2.50	101	94	88	99	92	87	95	89	85	77
3.00	104	98	93	102	96	92	97	93	89	80
4.00	107	102	98	105	100	97	100	97	94	84
5.00	109	105	102	107	103	100	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.50V I:0.0750A P:14.400W PF:0.8860 Freq:50.00Hz		
Lamp Flux:1425.25x1 lm		
Name: NS11-φ140MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H55mm	
	SUR.: D100mm	

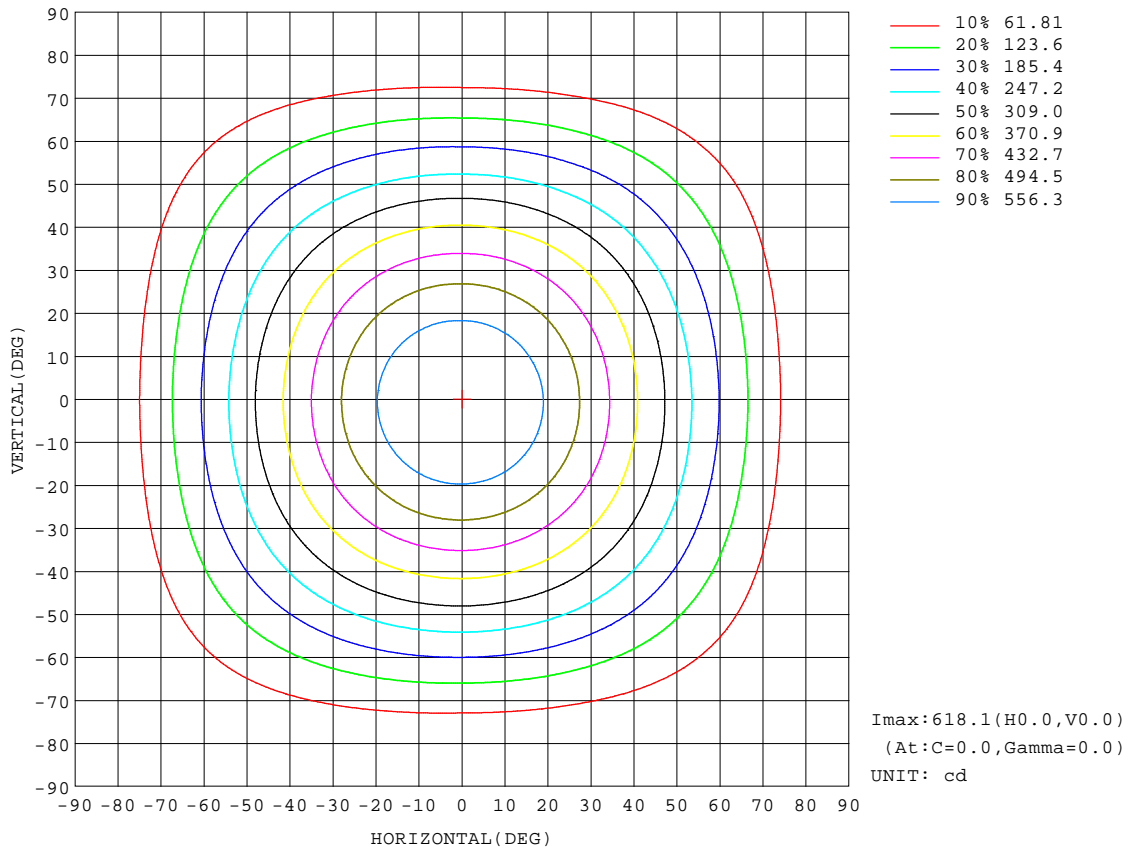


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:220.50V I:0.0750A P:14.400W PF:0.8860 Freq:50.00Hz		
Lamp Flux:1425.25x1 lm		
Name: NS11-φ140MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H55mm	
	SUR.: D100mm	

Flux out:934.5 lm

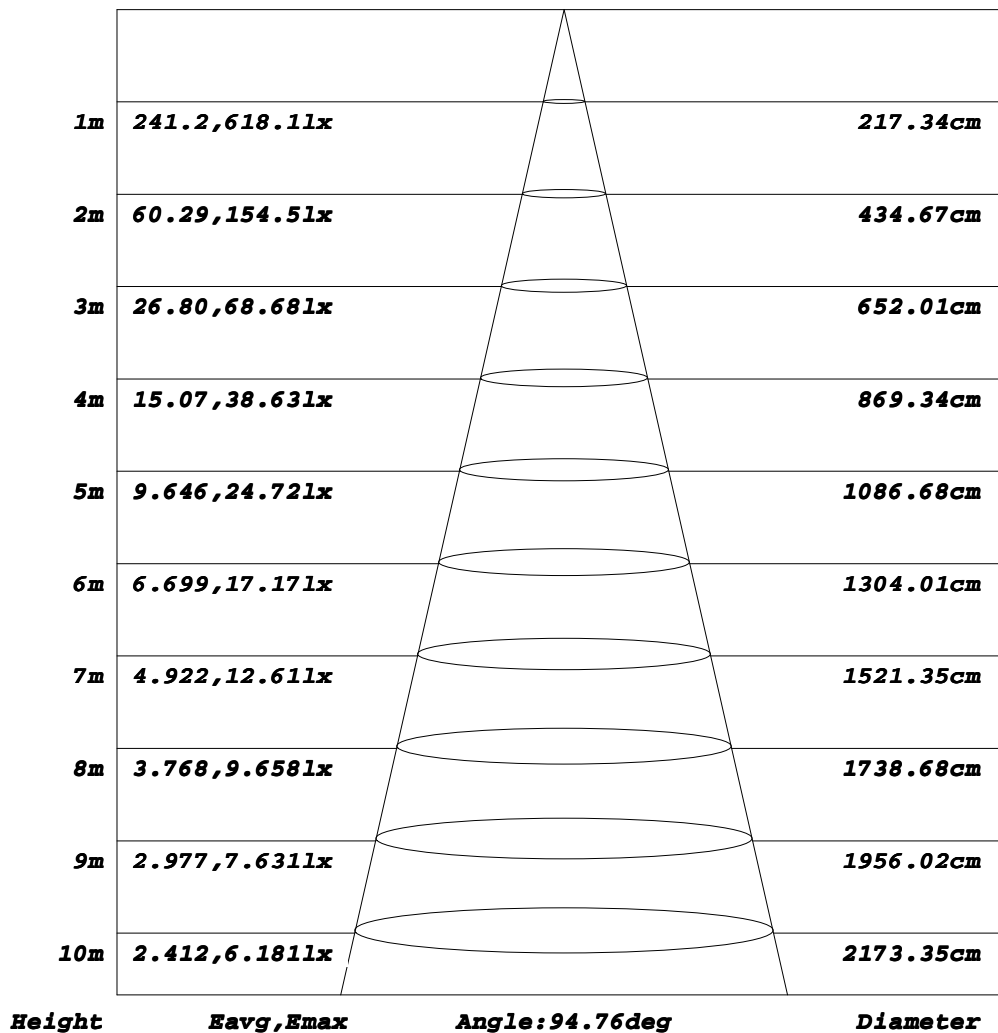


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:220.50V I:0.0750A P:14.400W PF:0.8860 Freq:50.00Hz		
Lamp Flux:1425.25x1 lm		
Name: NS11-φ140MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H55mm	
	SUR.: D100mm	

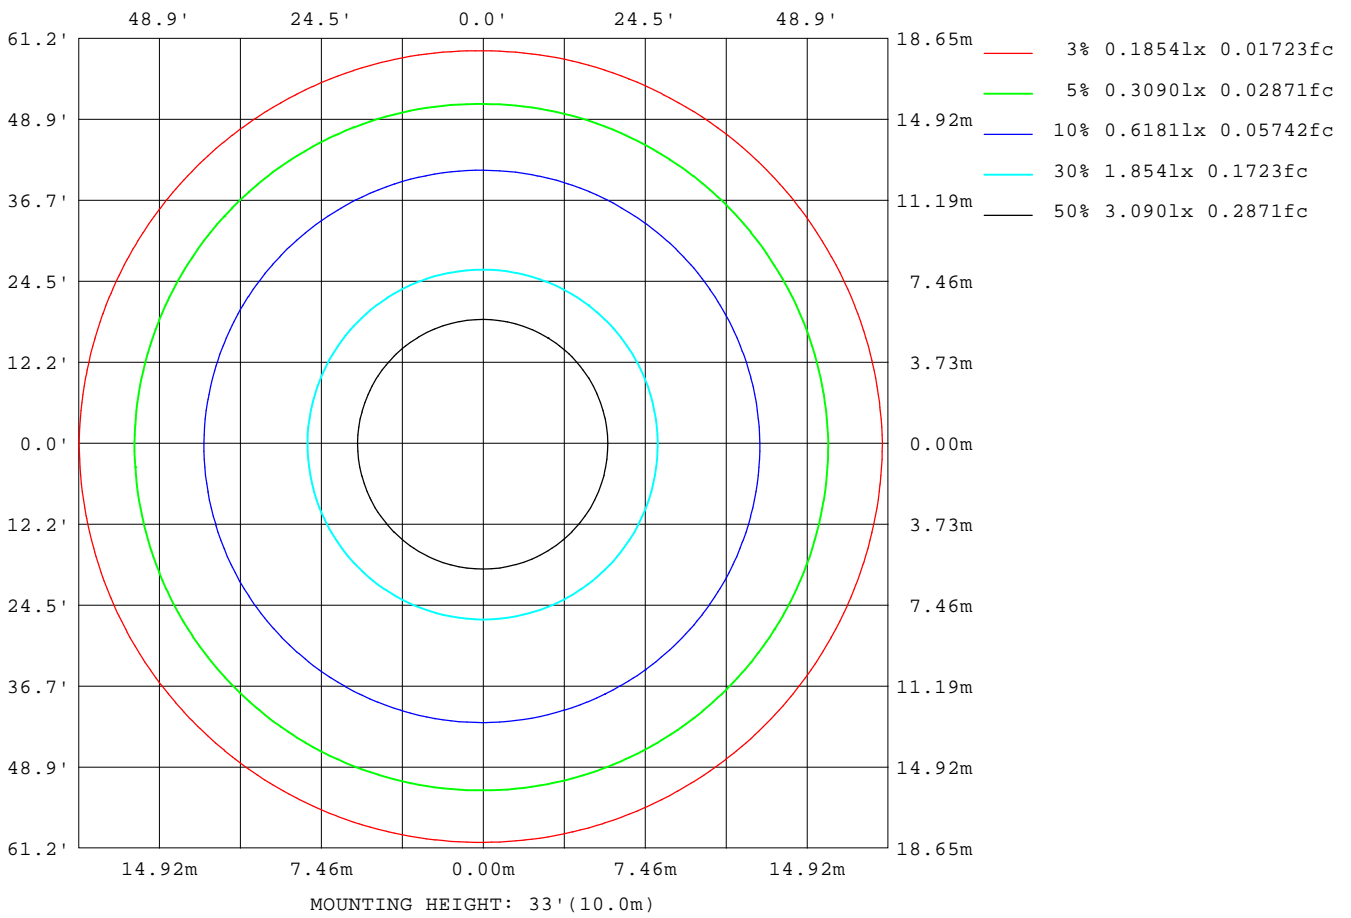

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

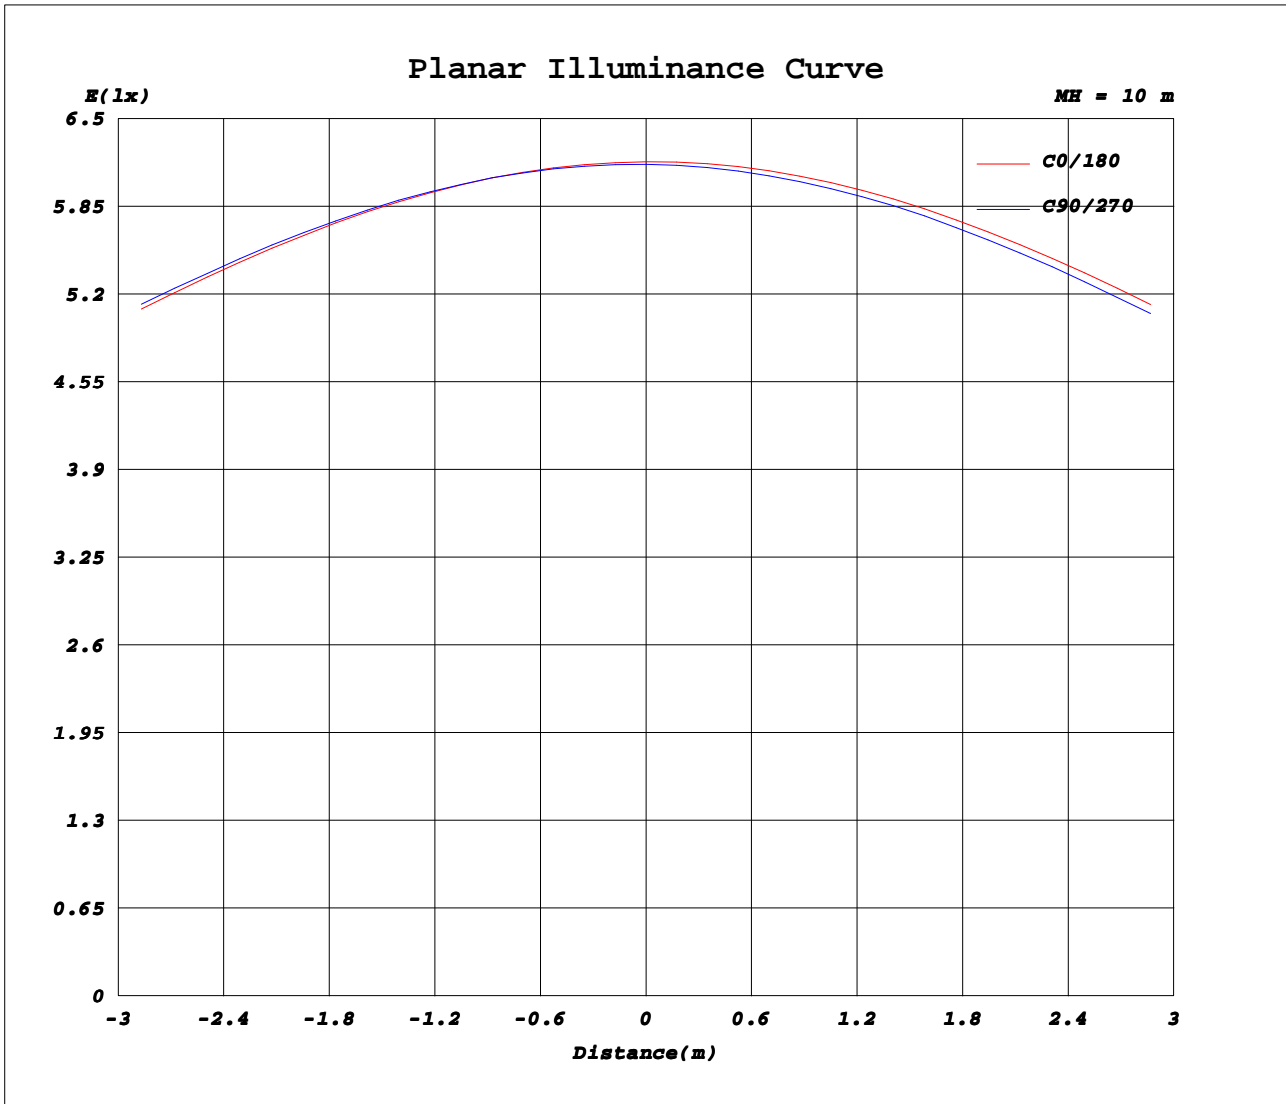

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.50V I:0.0750A P:14.400W PF:0.8860 Freq:50.00Hz Lamp Flux:1425.25x1 lm		
Name: NS11-φ140MM-15W	Type: LED	
MFR.: Lumega Group	DIM.: D140*H55mm	
	SUR.: D100mm	

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	618	617	616	616	617	618	618	618	617	616	616	617							
5	613	613	613	613	614	614	614	613	611	610	610	611							
10	600	600	601	601	602	602	602	600	598	596	596	597							
15	578	580	581	582	582	583	582	579	577	574	574	576							
20	550	552	554	555	555	555	554	551	548	545	545	547							
25	514	516	518	519	519	519	518	515	512	509	509	510							
30	472	475	477	479	479	479	478	474	471	468	468	469							
35	427	430	433	435	435	434	433	429	425	422	422	424							
40	379	383	386	388	388	387	386	382	378	375	375	376							
45	330	334	337	339	340	340	339	335	330	326	326	327							
50	281	285	287	289	291	291	290	283	277	271	271	275							
55	232	235	237	239	240	241	240	233	225	220	220	224							
60	184	184	185	186	189	191	192	185	178	173	173	177							
65	137	134	133	133	138	142	145	139	133	127	127	131							
70	93.9	89.1	86.7	86.7	91.6	96.9	101	94.8	87.8	81.8	82.4	86.4							
75	55.5	49.9	46.9	46.6	51.7	57.4	61.6	56.3	49.7	44.0	44.6	48.5							
80	21.2	19.2	18.4	18.8	21.9	25.2	27.5	25.2	21.9	18.8	18.4	19.2							
85	5.92	6.81	7.43	7.80	7.78	7.60	7.33	7.21	7.07	6.89	6.63	6.30							
90	2.22	2.07	2.07	2.21	2.62	3.08	3.47	3.52	3.44	3.24	2.99	2.65							
95	2.44	2.47	2.55	2.68	2.91	3.15	3.36	3.50	3.56	3.50	3.28	2.93							
100	2.92	2.74	2.69	2.77	3.07	3.44	3.77	3.93	3.98	3.91	3.71	3.38							
105	3.46	3.26	3.20	3.27	3.57	3.93	4.26	4.42	4.47	4.40	4.21	3.90							
110	4.03	3.83	3.77	3.84	4.14	4.49	4.82	4.97	5.01	4.95	4.76	4.45							
115	4.65	4.43	4.35	4.42	4.72	5.09	5.44	5.57	5.60	5.53	5.34	5.05							
120	5.27	5.04	4.95	5.00	5.32	5.69	6.05	6.17	6.20	6.11	5.94	5.66							
125	5.89	5.68	5.60	5.66	5.97	6.32	6.65	6.76	6.77	6.68	6.51	6.24							
130	6.49	6.28	6.21	6.26	6.56	6.90	7.22	7.32	7.31	7.22	7.06	6.81							
135	7.00	6.81	6.75	6.82	7.10	7.43	7.73	7.80	7.78	7.68	7.52	7.29							
140	7.46	7.29	7.24	7.30	7.57	7.88	8.17	8.24	8.22	8.12	7.97	7.75							
145	7.88	7.78	7.77	7.84	8.05	8.30	8.52	8.60	8.60	8.52	8.38	8.16							
150	8.24	8.18	8.18	8.25	8.43	8.63	8.81	8.87	8.87	8.80	8.67	8.49							
155	8.57	8.56	8.58	8.64	8.78	8.93	9.06	9.14	9.17	9.14	9.02	8.83							
160	8.88	8.91	8.96	9.01	9.09	9.18	9.26	9.31	9.34	9.32	9.23	9.09							
165	9.22	9.25	9.28	9.32	9.38	9.43	9.47	9.49	9.50	9.48	9.42	9.33							
170	9.53	9.52	9.53	9.55	9.60	9.66	9.70	9.68	9.64	9.60	9.57	9.55							
175	9.80	9.74	9.70	9.70	9.77	9.85	9.91	9.87	9.80	9.73	9.73	9.75							
180	9.94	9.87	9.83	9.82	9.87	9.93	9.98	9.92	9.85	9.79	9.80	9.85							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: