
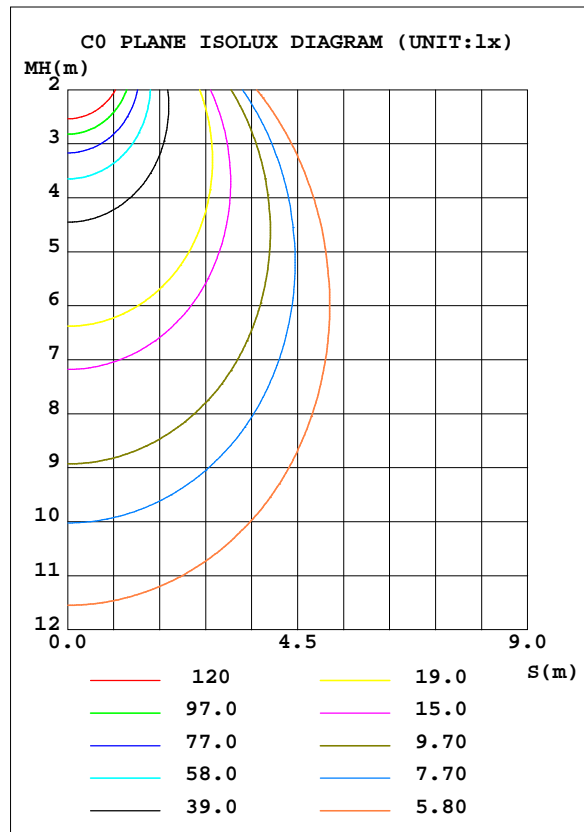


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.50V I:0.0890A P:17.700W PF:0.9170 Freq:50.00Hz		
Lamp Flux:1792.86x1 lm		
Name: NS11-φ162MM-18W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 101.29 lm/W			
MODEL		I _{max} (cd)	773.4	S/MH(C0/180)	1.16
NOMINAL POWER(W)	18	LOR(%)	100.0	S/MH(C90/270)	1.16
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1792.9	η UP, DN(C0-180)	1.2, 48.8
NOMINAL FLUX(lm)	1792.86	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3, 48.6
LAMPS INSIDE	1	η up(%)	2.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.5	CIBSE SHR MAX	1.30

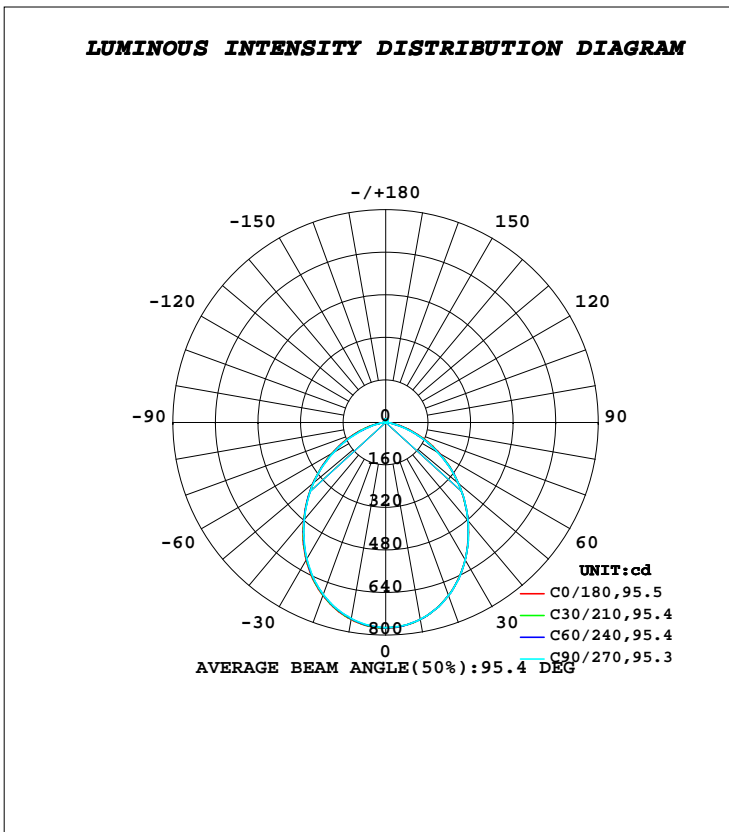

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	752.3	751.8	751.6	752.2	752.4	750.3	748.5	749.5	0- 10	72.70	72.70	4.05,4.05
20	692.0	692.4	692.5	692.6	692.1	689.7	687.9	689.0	10- 20	204.3	277.0	15.5,15.5
30	597.3	597.8	598.2	598.5	598.2	595.3	592.9	594.0	20- 30	297.8	574.8	32.1,32.1
40	481.9	481.9	481.5	480.8	479.8	478.0	477.1	478.6	30- 40	337.3	912.1	50.9,50.9
50	358.7	357.3	356.7	357.6	358.2	355.9	354.0	355.3	40- 50	323.0	1235	68.9,68.9
60	235.5	229.7	227.3	231.0	234.7	230.6	226.6	229.2	50- 60	262.5	1498	83.5,83.5
70	120.2	111.4	108.1	114.5	120.7	113.6	106.7	110.4	60- 70	168.4	1666	92.9,92.9
80	27.11	24.58	24.32	28.23	31.76	28.97	25.53	25.45	70- 80	69.23	1735	96.8,96.8
90	2.886	2.484	2.561	3.488	4.390	4.272	3.844	3.411	80- 90	12.33	1748	97.5,97.5
100	3.610	3.375	3.458	4.093	4.735	4.822	4.651	4.237	90-100	3.981	1752	97.7,97.7
110	4.990	4.789	4.880	5.481	6.084	6.160	5.990	5.591	100-110	5.062	1757	98,98
120	6.547	6.300	6.368	6.986	7.606	7.643	7.443	7.077	110-120	6.189	1763	98.3,98.3
130	8.054	7.847	7.924	8.501	9.067	9.063	8.844	8.512	120-130	6.940	1770	98.7,98.7
140	9.285	9.138	9.231	9.754	10.26	10.23	10.02	9.707	130-140	7.038	1777	99.1,99.1
150	10.29	10.28	10.40	10.76	11.08	11.05	10.88	10.63	140-150	6.406	1783	99.5,99.5
160	11.16	11.28	11.41	11.55	11.66	11.69	11.64	11.45	150-160	5.128	1788	99.7,99.7
170	11.96	12.00	12.06	12.15	12.21	12.14	12.05	12.00	160-170	3.333	1792	99.9,99.9
180	12.50	12.39	12.35	12.44	12.53	12.43	12.32	12.37	170-180	1.168	1793	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.50V I:0.0890A P:17.700W PF:0.9170 Freq:50.00Hz		
Lamp Flux:1792.86x1 lm		
Name: NS11-φ162MM-18W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

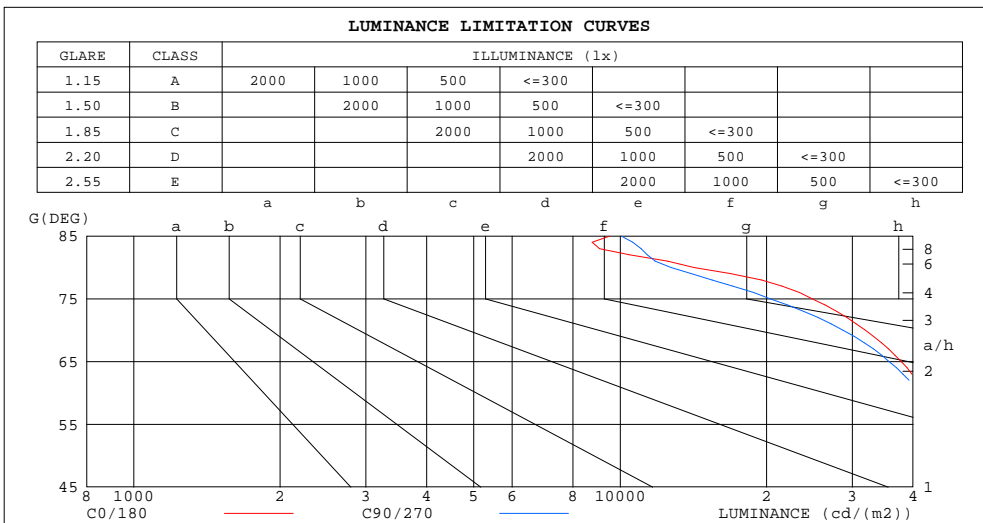

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9499	10065
80	14192	12734
75	24835	20380
70	31952	28744
65	37850	35750
60	42820	41332
55	47055	46532
50	50724	50452
45	53921	54092


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.50V I:0.0890A P:17.700W PF:0.9170 Freq:50.00Hz		
Lamp Flux:1792.86x1 lm		
Name: NS11-φ162MM-18W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

ρcc	80%			70%			50%			30%			10%			0	
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)										
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.97	
1.0	1.05	1.02	.98	1.03	.99	.96	.98	.95	.93	.94	.92	.90	.90	.88	.86	.84	
2.0	.93	.87	.82	.91	.85	.81	.87	.82	.78	.83	.80	.76	.80	.77	.74	.72	
3.0	.83	.75	.69	.81	.74	.68	.78	.72	.67	.75	.70	.65	.72	.68	.64	.62	
4.0	.74	.66	.59	.72	.65	.59	.70	.63	.58	.67	.61	.57	.65	.60	.56	.54	
5.0	.66	.58	.52	.65	.57	.51	.63	.56	.51	.61	.55	.50	.58	.53	.49	.47	
6.0	.60	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.53	.48	.44	.42	
7.0	.55	.46	.41	.54	.46	.40	.52	.45	.40	.50	.44	.39	.49	.43	.39	.37	
8.0	.50	.42	.36	.49	.42	.36	.48	.41	.36	.46	.40	.35	.45	.39	.35	.33	
9.0	.46	.38	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.42	.36	.32	.30	
10.0	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.39	.33	.29	.27	

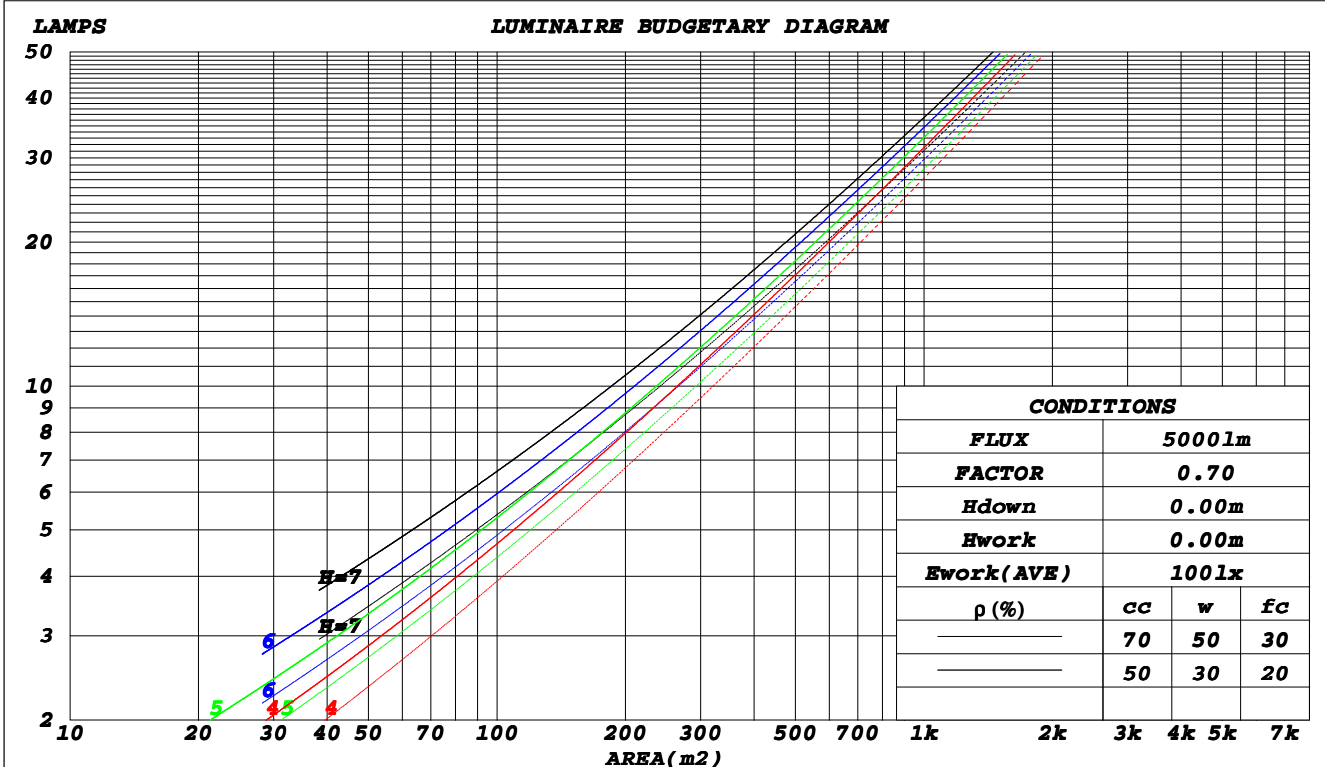

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.50V I:0.0890A P:17.700W PF:0.9170 Freq:50.00Hz		
Lamp Flux:1792.86x1 lm		
Name: NS11-φ162MM-18W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.271	.154	.049	.263	.150	.048	.249	.143	.046	.235	.136	.044	.223	.129	.042	
2.0	.261	.143	.044	.254	.140	.043	.242	.134	.042	.230	.129	.040	.219	.124	.039	
3.0	.246	.131	.039	.240	.128	.039	.228	.124	.038	.218	.119	.037	.208	.115	.036	
4.0	.229	.119	.035	.224	.117	.035	.214	.114	.034	.205	.110	.033	.196	.107	.032	
5.0	.214	.109	.032	.209	.108	.031	.200	.104	.031	.192	.101	.030	.184	.099	.030	
6.0	.200	.100	.029	.196	.099	.028	.188	.096	.028	.180	.094	.028	.173	.091	.027	
7.0	.188	.093	.026	.184	.092	.026	.177	.089	.026	.170	.087	.025	.163	.085	.025	
8.0	.176	.086	.024	.173	.085	.024	.166	.083	.024	.160	.081	.023	.154	.079	.023	
9.0	.166	.080	.022	.163	.079	.022	.157	.078	.022	.151	.076	.022	.146	.074	.021	
10.0	.156	.075	.021	.154	.074	.021	.148	.073	.020	.143	.071	.020	.138	.070	.020	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.210	.210	.210	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.197	.176	.157	.169	.151	.135	.115	.104	.093	.066	.060	.054	.021	.019	.018	
2.0	.188	.152	.121	.161	.130	.105	.110	.090	.073	.064	.053	.043	.020	.017	.014	
3.0	.179	.134	.097	.154	.115	.084	.106	.080	.059	.061	.047	.035	.020	.015	.011	
4.0	.172	.120	.081	.147	.104	.070	.101	.072	.050	.059	.042	.029	.019	.014	.010	
5.0	.164	.110	.069	.141	.095	.060	.097	.066	.043	.056	.039	.025	.018	.013	.008	
6.0	.158	.101	.061	.135	.088	.053	.093	.061	.038	.054	.036	.022	.017	.012	.007	
7.0	.151	.094	.055	.130	.082	.048	.090	.057	.034	.052	.034	.020	.017	.011	.007	
8.0	.145	.089	.050	.125	.077	.043	.086	.054	.031	.050	.032	.018	.016	.010	.006	
9.0	.139	.084	.046	.120	.073	.040	.083	.051	.029	.048	.030	.017	.016	.010	.006	
10.0	.134	.079	.043	.115	.069	.038	.080	.049	.027	.047	.029	.016	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.50V I:0.0890A P:17.700W PF:0.9170 Freq:50.00Hz		
Lamp Flux:1792.86x1 lm		
Name: NS11-φ162MM-18W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.9	27.2	26.1	27.5	27.7	25.8	27.2	26.1	27.4	27.6
3H	26.8	28.1	27.2	28.4	28.7	26.7	27.9	27.0	28.2	28.5
4H	27.1	28.3	27.4	28.6	28.9	26.8	28.0	27.2	28.3	28.6
6H	27.2	28.3	27.5	28.6	28.9	26.9	28.0	27.2	28.3	28.6
8H	27.2	28.2	27.5	28.6	28.9	26.9	27.9	27.2	28.3	28.6
12H	27.1	28.2	27.5	28.5	28.8	26.8	27.9	27.2	28.2	28.6
4H 2H	26.3	27.5	26.6	27.7	28.0	26.2	27.4	26.5	27.7	28.0
3H	27.4	28.4	27.7	28.7	29.1	27.2	28.2	27.6	28.6	28.9
4H	27.7	28.7	28.1	29.0	29.4	27.5	28.4	27.9	28.8	29.1
6H	27.8	28.7	28.3	29.1	29.5	27.5	28.4	28.0	28.8	29.2
8H	27.8	28.6	28.3	29.0	29.4	27.5	28.3	28.0	28.7	29.2
12H	27.8	28.5	28.3	28.9	29.4	27.5	28.2	28.0	28.7	29.1
8H 4H	27.7	28.5	28.2	28.9	29.4	27.5	28.3	28.0	28.7	29.1
6H	27.9	28.6	28.4	29.0	29.5	27.6	28.3	28.1	28.7	29.2
8H	27.9	28.5	28.4	29.0	29.5	27.7	28.2	28.2	28.7	29.2
12H	27.9	28.4	28.5	28.9	29.4	27.7	28.2	28.2	28.7	29.2
12H 4H	27.7	28.4	28.2	28.8	29.3	27.5	28.2	27.9	28.6	29.1
6H	27.9	28.5	28.4	28.9	29.4	27.6	28.2	28.1	28.7	29.2
8H	27.9	28.4	28.4	28.9	29.4	27.7	28.1	28.2	28.6	29.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.5 / - 0.5					+ 0.6 / - 0.5				

CIE Pub.117, 1793 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.0)
 Area: 0.011 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.50V I:0.0890A P:17.700W PF:0.9170 Freq:50.00Hz Lamp Flux:1792.86x1 lm		
Name: NS11-φ162MM-18W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	61	50	43	60	50	43	59	49	43	37
0.80	71	60	53	70	60	53	68	59	53	46
1.00	79	69	62	78	68	62	76	69	61	55
1.25	86	77	70	85	76	70	82	74	69	62
1.50	91	82	76	89	81	75	86	79	74	67
2.00	97	90	84	95	88	83	92	86	81	73
2.50	101	94	88	99	92	87	95	89	85	77
3.00	104	98	93	101	96	92	97	93	89	80
4.00	107	102	98	105	100	97	100	97	94	84
5.00	109	105	102	107	103	100	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.50V I:0.0890A P:17.700W PF:0.9170 Freq:50.00Hz		
Lamp Flux:1792.86x1 lm		
Name: NS11-φ162MM-18W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

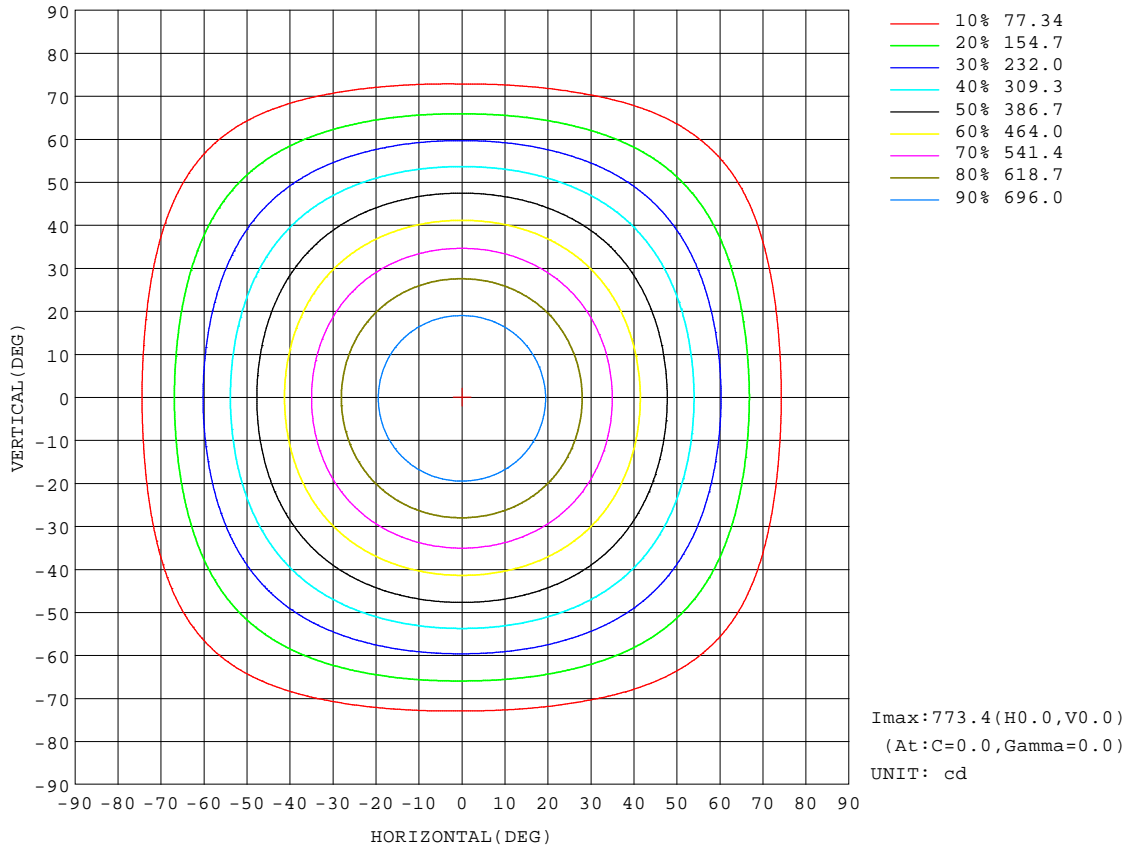


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:220.50V I:0.0890A P:17.700W PF:0.9170 Freq:50.00Hz		
Lamp Flux:1792.86x1 lm		
Name: NS11-φ162MM-18W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

Flux out:1174 lm

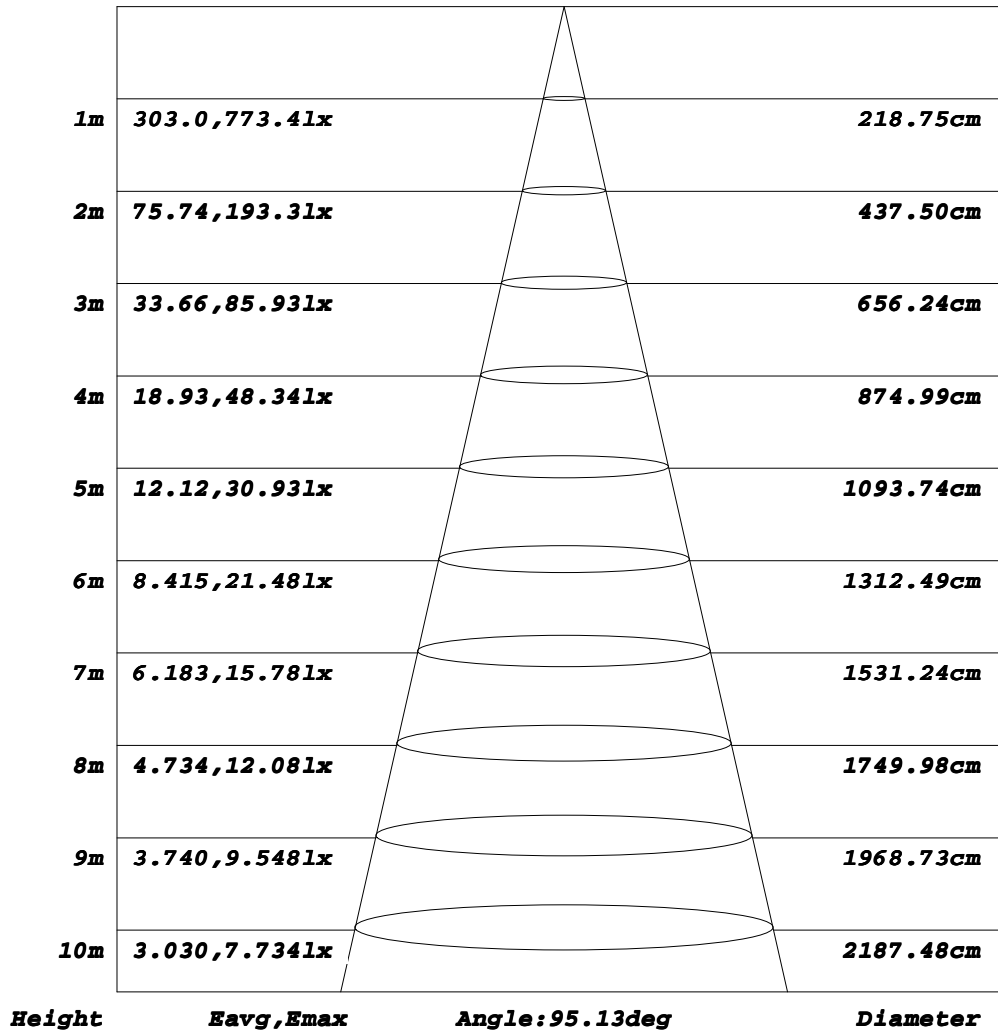


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:220.50V I:0.0890A P:17.700W PF:0.9170 Freq:50.00Hz		
Lamp Flux:1792.86x1 lm		
Name: NS11-φ162MM-18W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

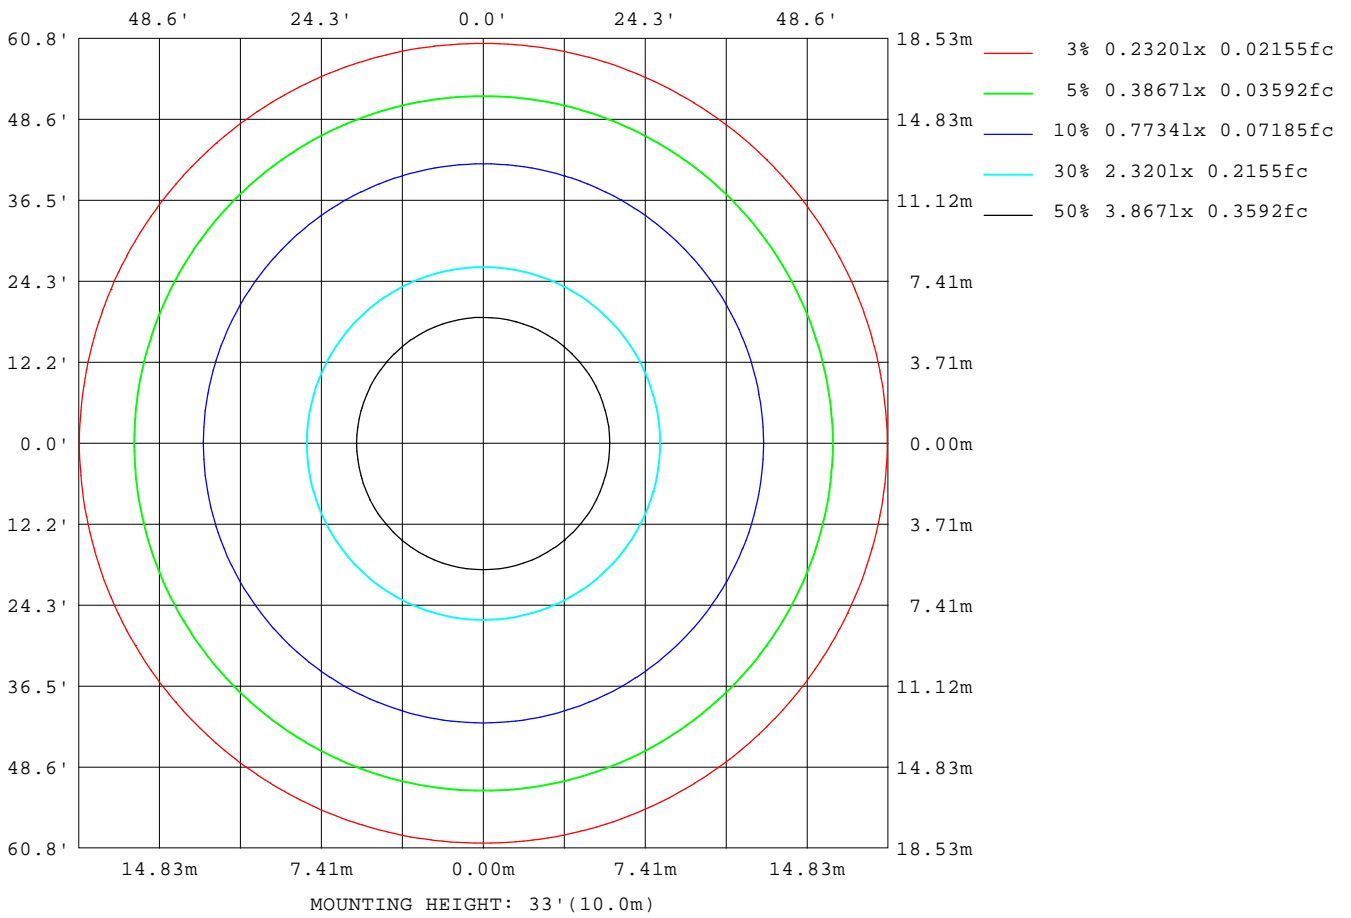

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

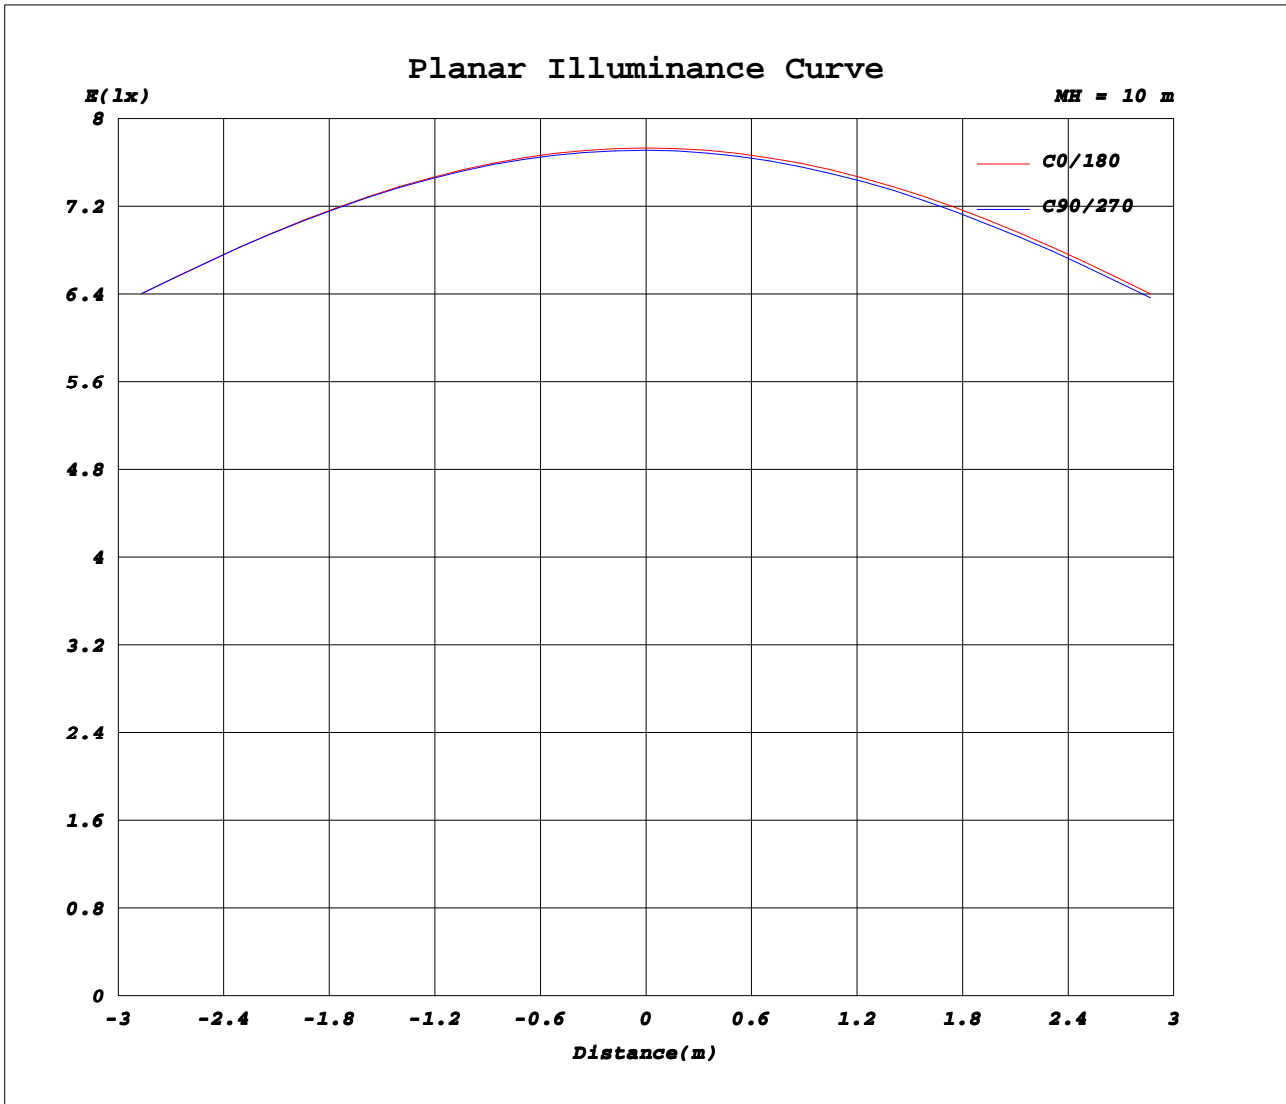

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.50V I:0.0890A P:17.700W PF:0.9170 Freq:50.00Hz Lamp Flux:1792.86x1 lm		
Name: NS11-φ162MM-18W	Type: LED	
MFR.: Lumega Group	DIM.: D162*H70mm	
	SUR.: D120mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	773	772	772	771	772	773	773	773	772	771	772	772							
5	768	767	767	767	767	768	768	767	766	765	765	766							
10	752	752	752	752	752	752	752	751	750	748	749	750							
15	727	727	727	727	727	727	727	725	724	723	723	725							
20	692	692	692	693	693	693	692	691	689	688	688	690							
25	649	649	649	649	650	650	649	647	646	644	645	646							
30	597	598	598	598	598	599	598	596	594	593	593	595							
35	541	542	543	543	543	542	541	539	538	536	537	539							
40	482	482	482	482	481	480	480	479	478	477	478	479							
45	419	420	421	421	421	420	420	418	417	416	416	417							
50	359	358	357	357	357	358	358	357	355	354	355	356							
55	297	295	294	294	294	295	295	294	292	291	292	294							
60	236	231	228	227	230	232	235	232	229	227	228	231							
65	176	171	167	166	169	173	176	172	168	165	166	170							
70	120	113	109	108	112	117	121	116	111	107	108	113							
75	70.7	63.5	59.3	58.0	62.4	67.8	72.0	67.5	62.0	57.4	58.8	63.2							
80	27.1	25.0	24.1	24.3	26.8	29.6	31.8	30.1	27.8	25.5	25.2	25.7							
85	9.11	9.26	9.44	9.65	9.94	10.2	10.4	10.5	10.4	10.3	9.98	9.60							
90	2.89	2.54	2.43	2.56	3.15	3.82	4.39	4.38	4.17	3.84	3.57	3.25							
95	3.04	2.94	2.97	3.11	3.47	3.86	4.21	4.30	4.27	4.12	3.87	3.51							
100	3.61	3.40	3.35	3.46	3.86	4.32	4.74	4.84	4.81	4.65	4.41	4.06							
105	4.27	4.06	4.01	4.12	4.51	4.97	5.37	5.48	5.45	5.31	5.07	4.72							
110	4.99	4.81	4.77	4.88	5.26	5.70	6.08	6.18	6.14	5.99	5.76	5.42							
115	5.77	5.57	5.52	5.62	6.01	6.45	6.84	6.91	6.86	6.70	6.48	6.17							
120	6.55	6.33	6.27	6.37	6.76	7.21	7.61	7.67	7.61	7.44	7.23	6.93							
125	7.31	7.12	7.08	7.18	7.56	7.99	8.36	8.41	8.33	8.16	7.95	7.66							
130	8.05	7.87	7.83	7.92	8.29	8.71	9.07	9.11	9.02	8.84	8.64	8.38							
135	8.70	8.53	8.50	8.60	8.96	9.36	9.70	9.72	9.62	9.43	9.24	8.99							
140	9.28	9.15	9.13	9.23	9.57	9.94	10.3	10.3	10.2	10.0	9.83	9.58							
145	9.81	9.73	9.74	9.85	10.1	10.4	10.7	10.7	10.7	10.5	10.3	10.1							
150	10.3	10.3	10.3	10.4	10.6	10.9	11.1	11.1	11.0	10.9	10.7	10.5							
155	10.7	10.8	10.8	10.9	11.1	11.3	11.4	11.4	11.4	11.3	11.2	11.0							
160	11.2	11.2	11.3	11.4	11.5	11.6	11.7	11.7	11.7	11.6	11.5	11.4							
165	11.6	11.7	11.7	11.8	11.8	11.9	11.9	11.9	11.9	11.9	11.8	11.7							
170	12.0	12.0	12.0	12.1	12.1	12.2	12.2	12.2	12.1	12.0	12.0	12.0							
175	12.3	12.3	12.2	12.3	12.3	12.4	12.5	12.4	12.3	12.3	12.2	12.3							
180	12.5	12.4	12.4	12.3	12.4	12.5	12.5	12.5	12.4	12.3	12.3	12.4							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: