
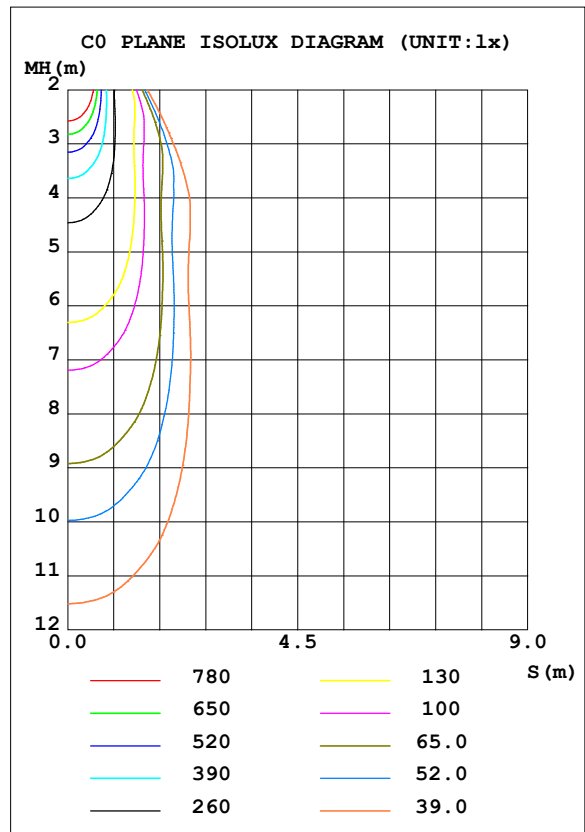


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.40V I:0.1170A P:25.100W PF:0.9680 Freq:50.00Hz		
Lamp Flux:2557.19x1 lm		
Name: NS27-25W	Type: LED	
MFR.: Lumega		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 101.88 lm/W			
MODEL		I _{max} (cd)	5172	S/MH (C0/180)	0.60
NOMINAL POWER (W)	25	LOR (%)	100.0	S/MH (C90/270)	0.53
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	2557.2	η UP, DN (C0-180)	0.3, 53.5
NOMINAL FLUX (lm)	2557.19	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 45.5
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220	η down (%)	99.0	CIBSE SHR MAX	0.55

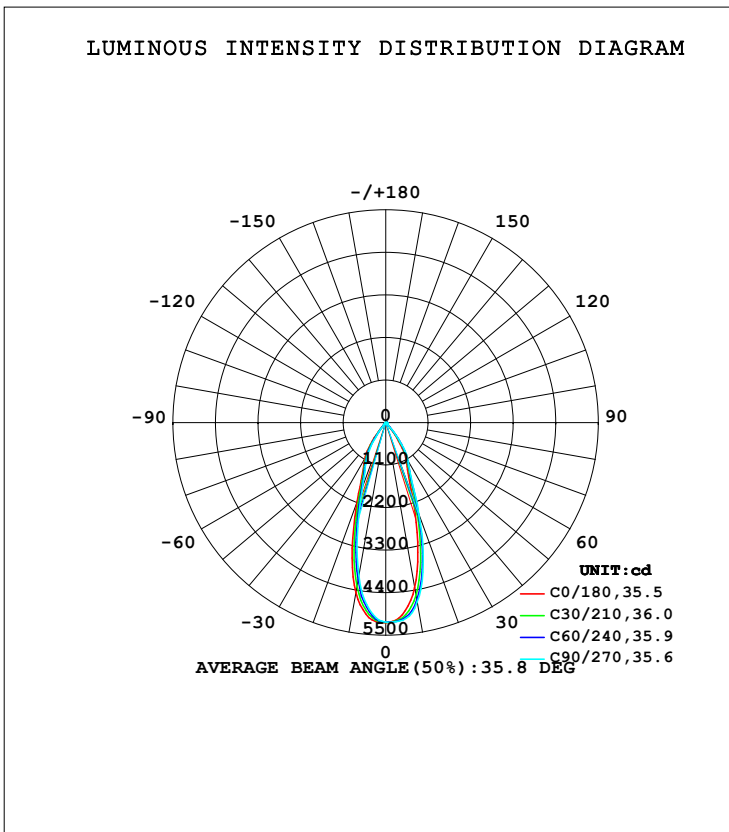

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	4333	4589	4708	4634	4467	4207	4010	4085	0- 10	458.4	458.4	17.9,17.9
20	2041	2366	2509	2382	2159	1924	1759	1824	10- 20	892.6	1351	52.8,52.8
30	1033	1120	1161	1137	1082	996.9	931.9	954.6	20- 30	662.0	2013	78.7,78.7
40	156.4	292.5	355.8	310.4	227.9	149.3	92.10	102.0	30- 40	388.4	2401	93.9,93.9
50	38.61	41.22	42.87	43.31	42.74	40.25	37.86	37.60	40- 50	61.37	2463	96.3,96.3
60	24.58	27.01	28.53	28.92	28.33	25.81	23.44	23.34	50- 60	29.72	2493	97.5,97.5
70	14.04	15.78	17.00	17.58	17.58	16.49	15.21	14.49	60- 70	20.36	2513	98.3,98.3
80	8.751	8.395	9.211	12.43	14.94	12.30	8.983	8.231	70- 80	14.65	2528	98.8,98.8
90	0.6098	0.0439	0.5454	2.894	5.285	5.983	5.600	3.694	80- 90	4.847	2532	99,99
100	1.167	0.4648	0.9591	3.526	6.134	6.785	6.292	4.316	90-100	3.731	2536	99.2,99.2
110	2.009	1.349	1.849	4.359	6.910	7.579	7.118	5.154	100-110	4.369	2540	99.3,99.3
120	2.586	2.014	2.535	4.969	7.403	7.912	7.351	5.492	110-120	4.835	2545	99.5,99.5
130	2.702	2.289	2.745	4.746	6.703	6.944	6.342	4.886	120-130	4.436	2550	99.7,99.7
140	2.552	2.297	2.587	3.858	5.073	5.091	4.605	3.755	130-140	3.286	2553	99.8,99.8
150	2.504	2.407	2.546	3.117	3.651	3.619	3.367	3.000	140-150	2.110	2555	99.9,99.9
160	2.214	2.232	2.313	2.526	2.696	2.591	2.420	2.309	150-160	1.278	2556	100,100
170	1.928	1.962	1.977	1.964	1.935	1.875	1.831	1.857	160-170	0.6100	2557	100,100
180	1.833	1.812	1.792	1.773	1.759	1.751	1.756	1.786	170-180	0.1758	2557	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.40V I:0.1170A P:25.100W PF:0.9680 Freq:50.00Hz		
Lamp Flux:2557.19x1 lm		
Name: NS27-25W	Type: LED	
MFR.: Lumega		

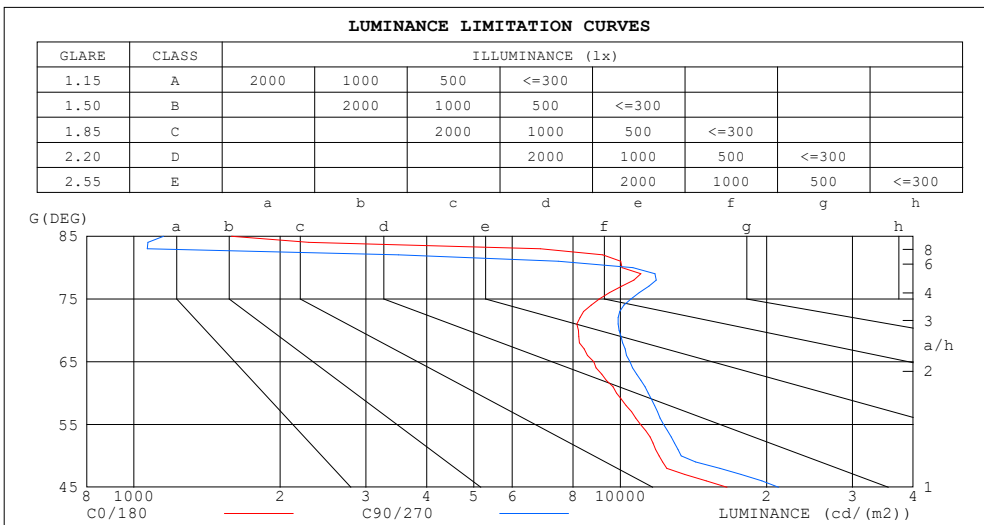

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1588	1152
80	10079	10609
75	9055	10516
70	8207	9940
65	8831	10466
60	9830	11411
55	11016	12276
50	12013	13338
45	16575	21164


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.40V I:0.1170A P:25.100W PF:0.9680 Freq:50.00Hz		
Lamp Flux:2557.19x1 lm		
Name: NS27-25W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.06	1.09	1.07	1.05	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.93	.91	.93	.91	.89	.88
3.0	.98	.93	.89	.96	.92	.89	.94	.90	.87	.91	.88	.86	.89	.86	.84	.83
4.0	.92	.87	.83	.91	.86	.83	.89	.85	.82	.87	.83	.81	.85	.82	.80	.78
5.0	.87	.82	.78	.86	.81	.78	.84	.80	.77	.83	.79	.76	.81	.78	.75	.74
6.0	.83	.77	.73	.82	.77	.73	.80	.76	.73	.79	.75	.72	.78	.74	.71	.70
7.0	.79	.73	.69	.78	.73	.69	.77	.72	.69	.75	.71	.68	.74	.71	.68	.67
8.0	.75	.69	.66	.74	.69	.66	.73	.69	.65	.72	.68	.65	.71	.67	.65	.63
9.0	.71	.66	.63	.71	.66	.62	.70	.65	.62	.69	.65	.62	.68	.64	.62	.60
10.0	.68	.63	.60	.68	.63	.60	.67	.62	.59	.66	.62	.59	.65	.62	.59	.58

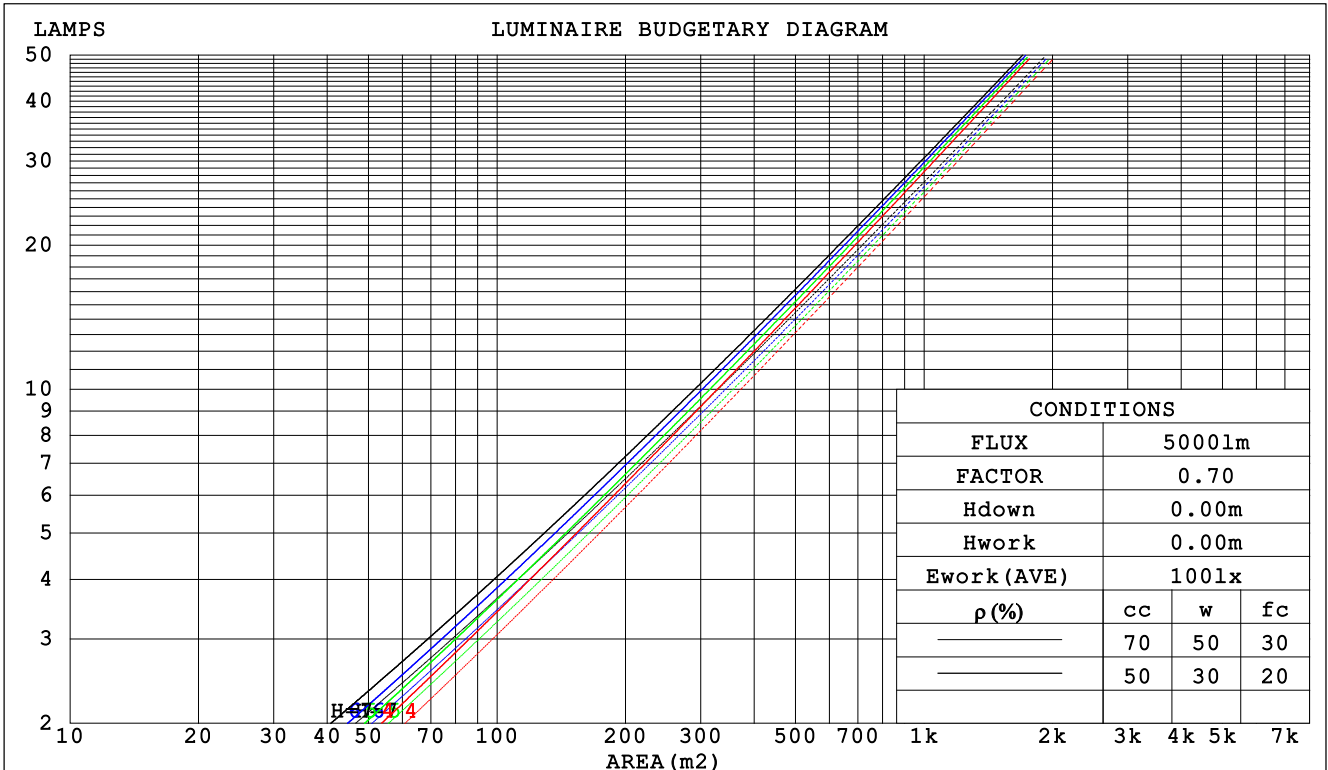

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.40V I:0.1170A P:25.100W PF:0.9680 Freq:50.00Hz		
Lamp Flux:2557.19x1 lm		
Name: NS27-25W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.170	.097	.031	.163	.093	.030	.150	.086	.027	.138	.079	.025	.127	.073	.024	
2.0	.160	.088	.027	.154	.085	.026	.143	.080	.025	.133	.075	.023	.124	.070	.022	
3.0	.151	.080	.024	.146	.078	.024	.137	.074	.023	.128	.070	.022	.120	.066	.021	
4.0	.143	.074	.022	.138	.072	.021	.130	.069	.021	.123	.066	.020	.116	.063	.019	
5.0	.135	.069	.020	.132	.068	.020	.124	.065	.019	.118	.062	.019	.112	.060	.018	
6.0	.129	.064	.018	.125	.063	.018	.119	.061	.018	.113	.059	.017	.108	.057	.017	
7.0	.122	.061	.017	.120	.060	.017	.114	.058	.017	.109	.056	.016	.104	.054	.016	
8.0	.117	.057	.016	.114	.056	.016	.110	.055	.016	.105	.053	.015	.101	.052	.015	
9.0	.112	.054	.015	.110	.053	.015	.105	.052	.015	.101	.051	.015	.097	.049	.014	
10.0	.107	.051	.014	.105	.051	.014	.101	.050	.014	.098	.048	.014	.094	.047	.014	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.178	.165	.153	.152	.141	.132	.104	.097	.091	.060	.056	.053	.019	.018	.017	
2.0	.162	.140	.121	.139	.121	.105	.095	.083	.073	.055	.049	.043	.018	.016	.014	
3.0	.149	.121	.099	.128	.104	.086	.088	.073	.060	.051	.042	.035	.016	.014	.012	
4.0	.138	.106	.082	.119	.092	.071	.082	.064	.050	.047	.037	.030	.015	.012	.010	
5.0	.129	.094	.069	.111	.082	.060	.076	.057	.042	.044	.034	.025	.014	.011	.008	
6.0	.121	.085	.059	.104	.074	.051	.072	.051	.036	.042	.030	.022	.013	.010	.007	
7.0	.114	.077	.051	.098	.067	.045	.068	.047	.032	.039	.028	.019	.013	.009	.006	
8.0	.108	.071	.045	.093	.061	.039	.064	.043	.028	.038	.025	.017	.012	.008	.006	
9.0	.103	.066	.040	.089	.057	.035	.061	.040	.025	.036	.024	.015	.012	.008	.005	
10.0	.098	.061	.036	.085	.053	.032	.059	.037	.022	.034	.022	.013	.011	.007	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.40V I:0.1170A P:25.100W PF:0.9680 Freq:50.00Hz		
Lamp Flux:2557.19x1 lm		
Name: NS27-25W	Type: LED	
MFR.: Lumega		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.0	20.9	20.3	21.1	21.3	21.1	22.0	21.3	22.1	22.3
3H	20.0	20.8	20.3	21.0	21.3	21.1	21.9	21.4	22.1	22.3
4H	20.1	20.8	20.3	21.0	21.3	21.1	21.9	21.4	22.1	22.3
6H	20.1	20.8	20.4	21.1	21.4	21.2	21.9	21.5	22.1	22.4
8H	20.1	20.8	20.5	21.1	21.4	21.1	21.8	21.5	22.1	22.4
12H	20.1	20.7	20.4	21.0	21.3	21.1	21.7	21.4	22.0	22.3
4H 2H	19.9	20.6	20.2	20.9	21.1	20.9	21.7	21.2	21.9	22.1
3H	19.9	20.6	20.3	20.9	21.2	21.0	21.6	21.3	21.9	22.2
4H	20.0	20.6	20.4	20.9	21.3	21.0	21.6	21.4	21.9	22.3
6H	20.2	20.7	20.6	21.1	21.4	21.2	21.7	21.6	22.0	22.4
8H	20.2	20.7	20.6	21.1	21.5	21.1	21.6	21.5	22.0	22.4
12H	20.2	20.6	20.6	21.0	21.4	21.1	21.5	21.5	21.9	22.3
8H 4H	20.0	20.5	20.4	20.9	21.3	21.0	21.5	21.4	21.8	22.2
6H	20.2	20.6	20.7	21.1	21.5	21.2	21.6	21.6	22.0	22.4
8H	20.3	20.6	20.7	21.1	21.5	21.1	21.5	21.6	21.9	22.4
12H	20.2	20.5	20.7	21.0	21.5	21.1	21.4	21.6	21.8	22.3
12H 4H	20.0	20.4	20.4	20.8	21.2	21.0	21.4	21.4	21.8	22.2
6H	20.2	20.6	20.7	21.0	21.5	21.1	21.5	21.6	21.9	22.4
8H	20.2	20.6	20.7	21.0	21.5	21.1	21.4	21.6	21.9	22.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.3 / - 2.9					+ 3.4 / - 4.3				
1.5H	+ 4.5 / - 2.8					+ 5.8 / - 4.2				
2.0H	+ 0.7 / - 0.5					+ 1.1 / - 0.4				

CIE Pub.117, 2557 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.3)
 Area: 0.005 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.40V I:0.1170A P:25.100W PF:0.9680 Freq:50.00Hz		
Lamp Flux:2557.19x1 lm		
Name: NS27-25W	Type: LED	
MFR.: Lumega		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	88	82	78	87	81	78	86	81	78	74
0.80	95	89	86	94	89	85	93	88	85	81
1.00	99	94	90	98	93	90	97	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	114	111	109	111	109	107	108	106	104	97
5.00	115	113	111	113	111	109	108	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.40V I:0.1170A P:25.100W PF:0.9680 Freq:50.00Hz		
Lamp Flux:2557.19x1 lm		
Name: NS27-25W	Type: LED	
MFR.: Lumega		

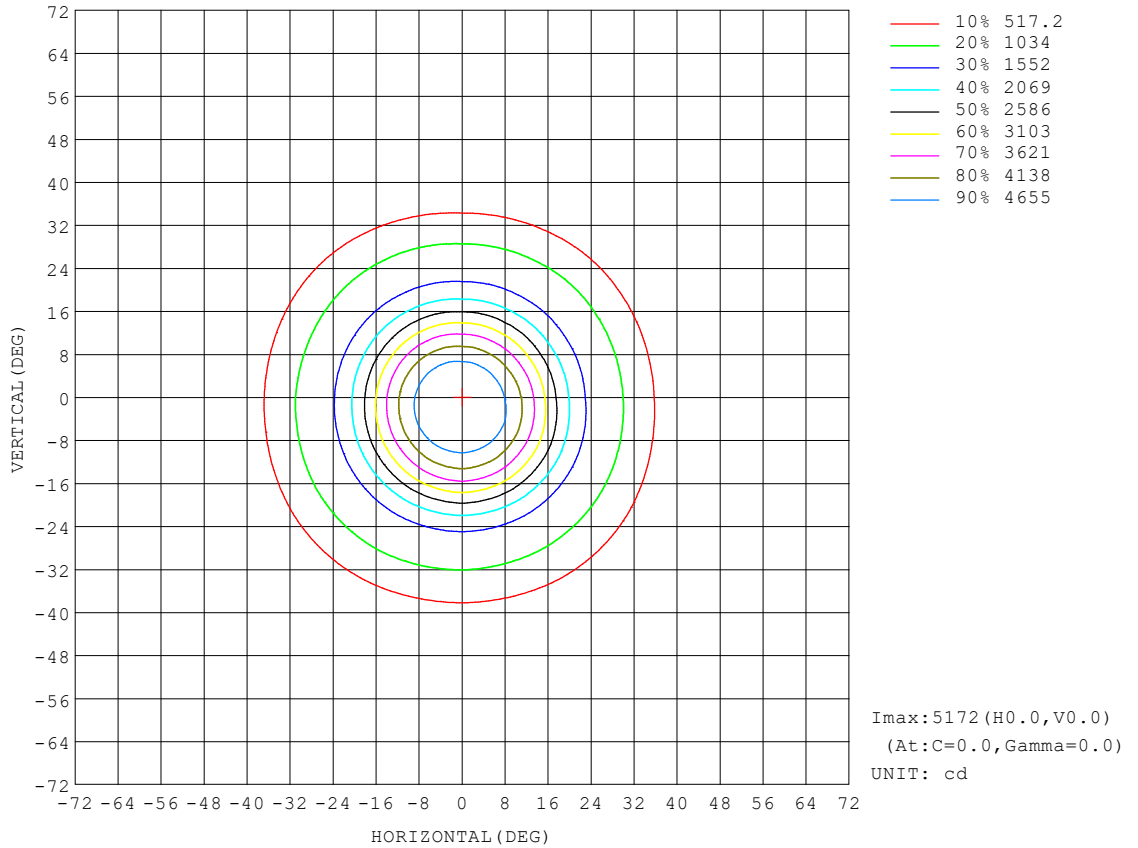


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

AAI Figure

Test:U:220.40V I:0.1170A P:25.100W PF:0.9680 Freq:50.00Hz		
Lamp Flux:2557.19x1 lm		
Name: NS27-25W	Type: LED	
MFR.: Lumega		

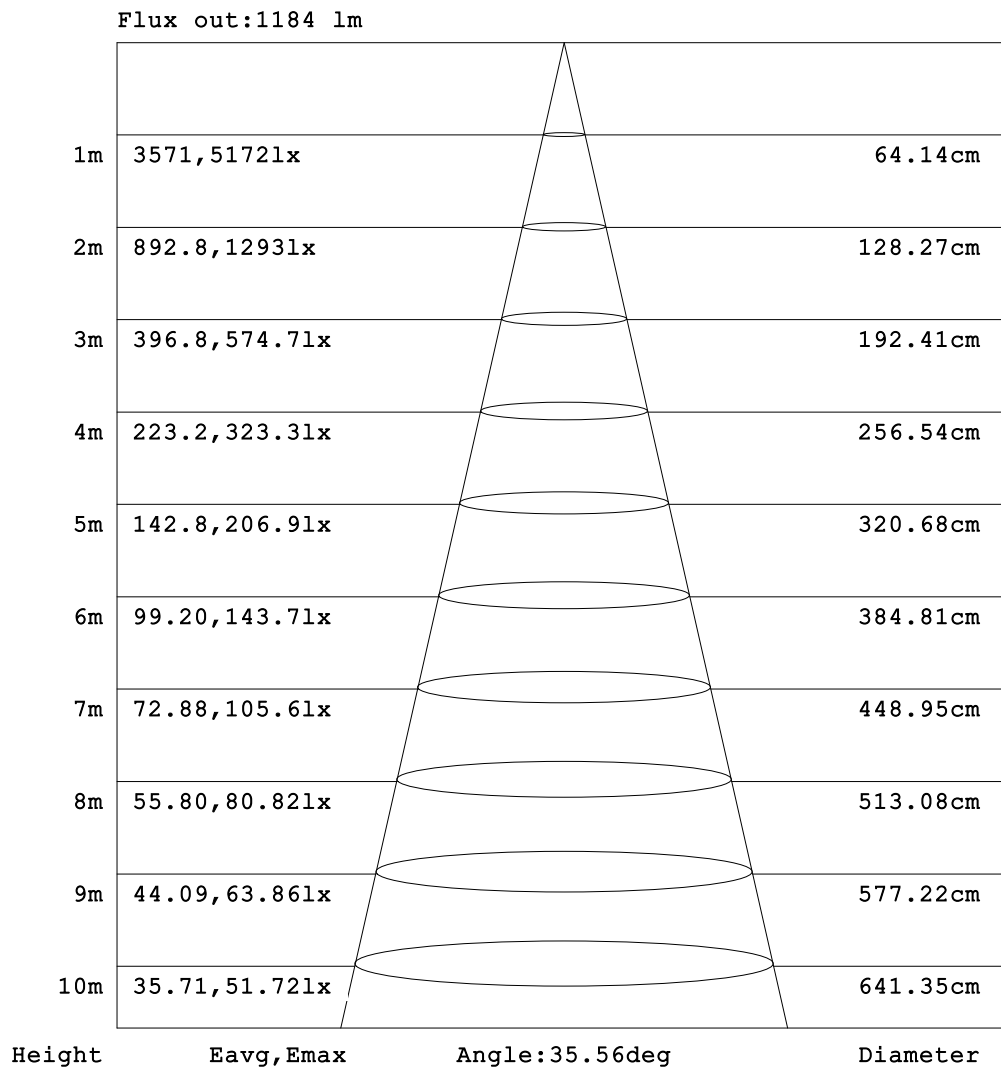


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.40V I:0.1170A P:25.100W PF:0.9680 Freq:50.00Hz Lamp Flux:2557.19x1 lm		
Name: NS27-25W	Type: LED	
MFR.: Lumega		

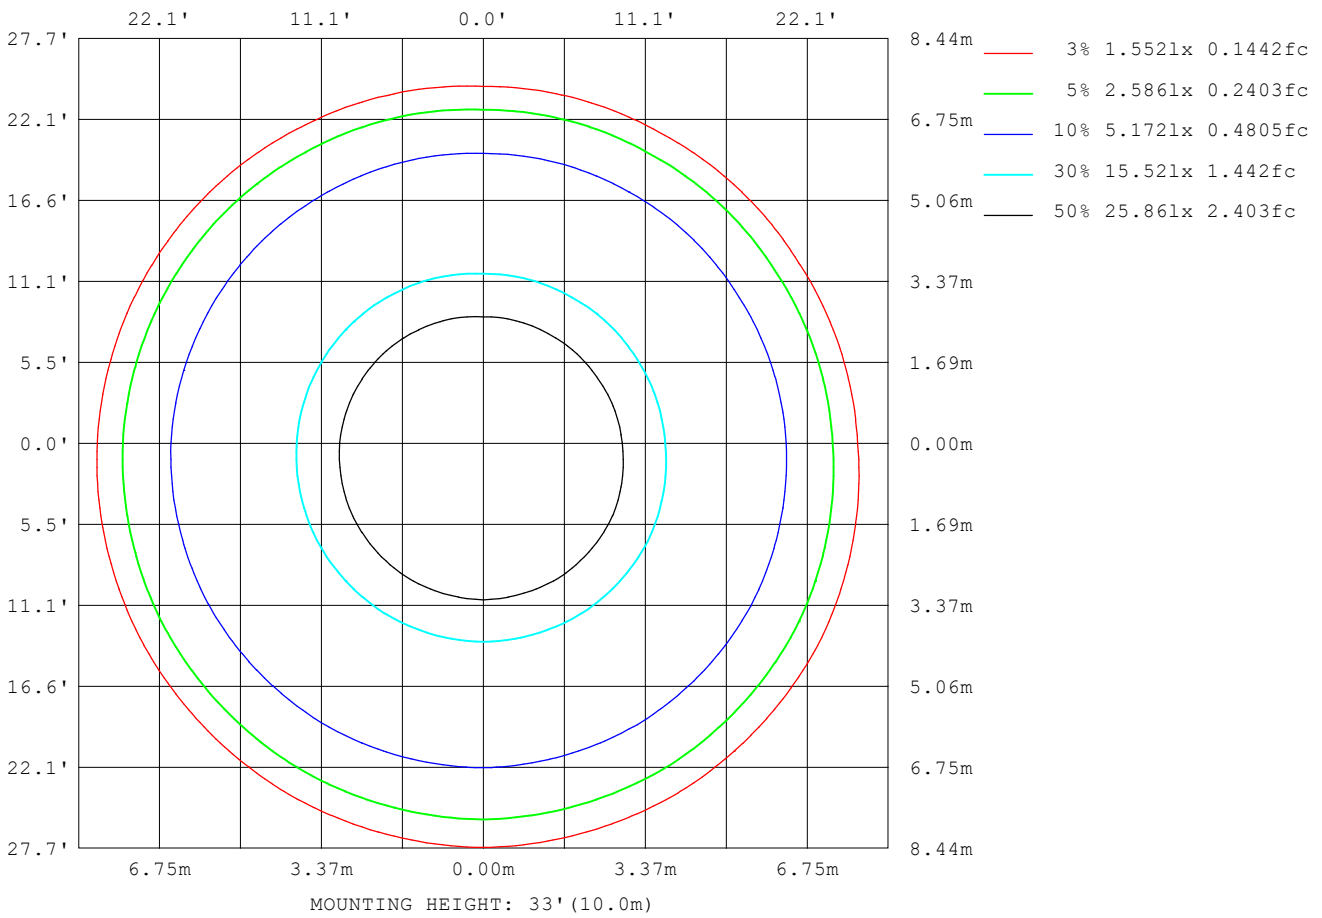

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

Planar Illuminance Curve

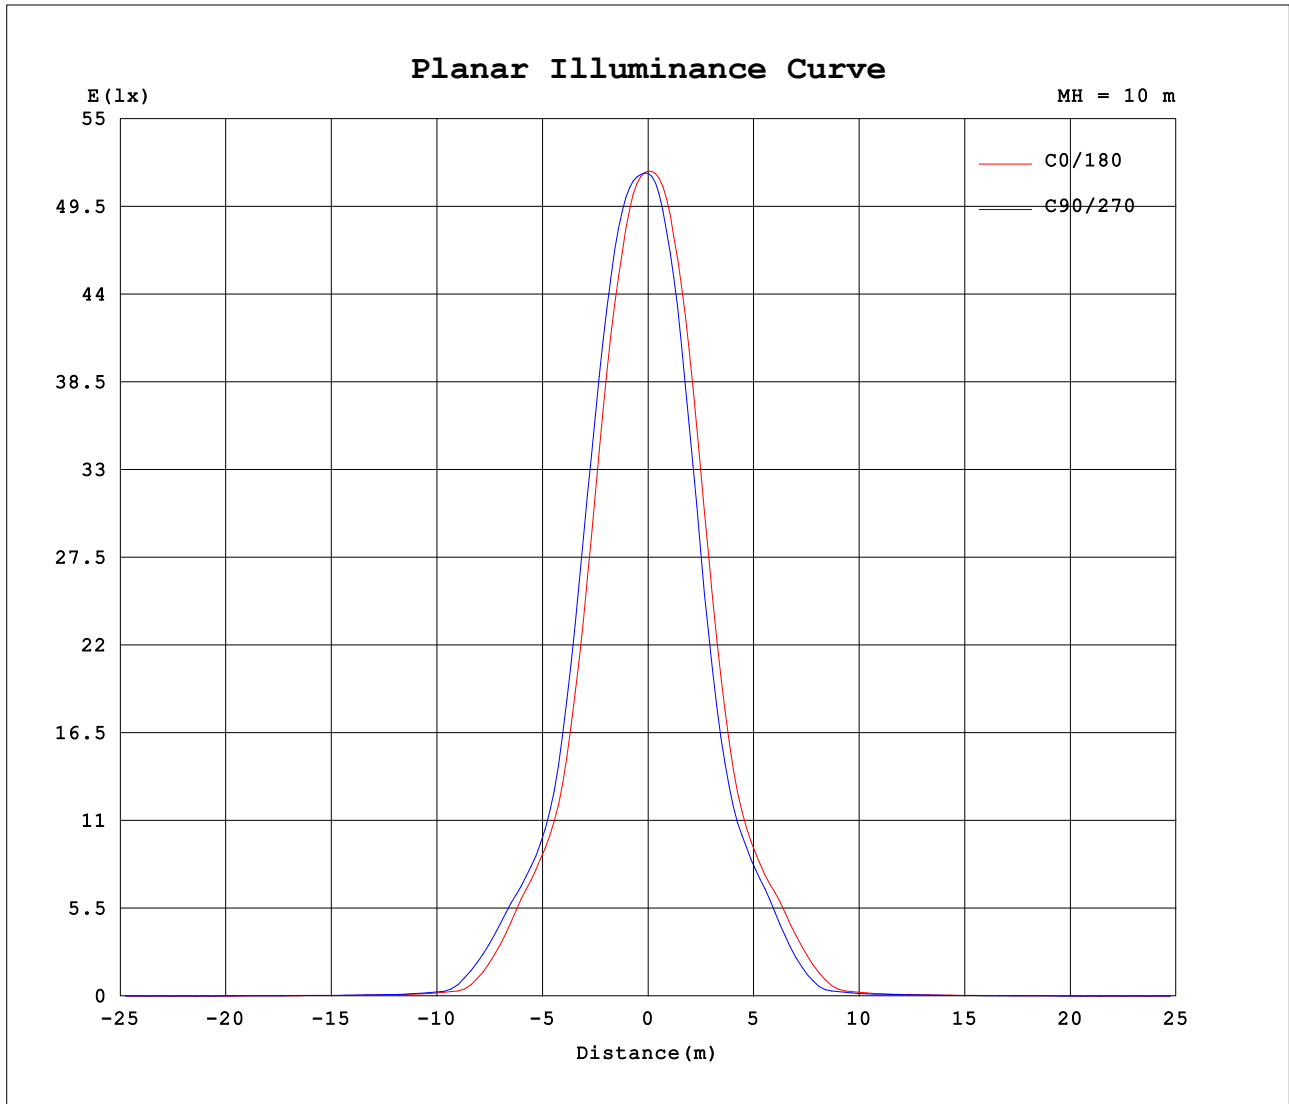

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.40V I:0.1170A P:25.100W PF:0.9680 Freq:50.00Hz		
Lamp Flux:2557.19x1 lm		
Name: NS27-25W	Type: LED	
MFR.: Lumega		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	5172	5164	5159	5158	5162	5168	5172	5168	5162	5158	5159	5164							
5	4988	5057	5103	5127	5123	5099	5058	4982	4908	4854	4862	4906							
10	4333	4527	4652	4708	4676	4591	4467	4290	4125	4010	4031	4139							
15	3202	3496	3684	3764	3698	3554	3362	3133	2928	2790	2818	2955							
20	2041	2288	2444	2509	2445	2319	2159	1995	1853	1759	1777	1871							
25	1350	1453	1520	1551	1529	1481	1419	1353	1295	1254	1257	1289							
30	1033	1099	1141	1161	1151	1123	1082	1024	970	932	938	972							
35	588	709	788	827	813	767	698	602	511	445	449	497							
40	156	259	326	356	334	287	228	173	125	92.1	91.3	113							
45	58.6	66.3	71.7	74.8	75.3	73.7	70.1	63.0	55.8	50.1	49.7	52.6							
50	38.6	40.5	41.9	42.9	43.3	43.3	42.7	41.1	39.4	37.9	37.5	37.7							
55	31.6	33.2	34.4	35.2	35.7	35.8	35.4	33.8	32.0	30.4	30.1	30.5							
60	24.6	26.4	27.7	28.5	28.9	28.9	28.3	26.7	24.9	23.4	23.1	23.5							
65	18.7	20.2	21.4	22.1	22.4	22.4	21.9	20.7	19.4	18.3	17.9	18.1							
70	14.0	15.3	16.3	17.0	17.5	17.7	17.6	16.9	16.1	15.2	14.7	14.3							
75	11.7	12.3	13.0	13.6	14.5	15.2	15.7	15.5	15.0	14.3	13.5	12.7							
80	8.75	8.32	8.47	9.21	11.4	13.5	14.9	13.4	11.2	8.98	8.27	8.19							
85	0.69	0.10	0.04	0.50	1.93	3.55	5.03	5.61	5.70	5.27	4.28	2.75							
90	0.61	0.05	0.03	0.55	2.05	3.74	5.28	5.92	6.04	5.60	4.53	2.86							
95	0.83	0.20	0.15	0.69	2.31	4.14	5.80	6.43	6.51	6.00	4.87	3.15							
100	1.17	0.50	0.43	0.96	2.60	4.45	6.13	6.76	6.81	6.29	5.17	3.46							
105	1.59	0.94	0.88	1.40	3.01	4.82	6.47	7.10	7.18	6.68	5.57	3.88							
110	2.01	1.38	1.32	1.85	3.45	5.27	6.91	7.54	7.62	7.12	6.01	4.30							
115	2.35	1.75	1.71	2.25	3.85	5.66	7.29	7.88	7.91	7.38	6.28	4.60							
120	2.59	2.02	2.01	2.54	4.10	5.84	7.40	7.92	7.90	7.35	6.29	4.70							
125	2.71	2.21	2.22	2.72	4.17	5.78	7.20	7.62	7.54	6.98	6.01	4.58							
130	2.70	2.28	2.30	2.74	4.04	5.46	6.70	7.01	6.88	6.34	5.49	4.28							
135	2.62	2.28	2.30	2.68	3.76	4.94	5.97	6.16	5.99	5.50	4.81	3.85							
140	2.55	2.29	2.30	2.59	3.41	4.31	5.07	5.18	5.00	4.61	4.10	3.41							
145	2.54	2.36	2.36	2.56	3.12	3.73	4.25	4.30	4.16	3.88	3.54	3.09							
150	2.50	2.40	2.41	2.55	2.92	3.32	3.65	3.67	3.57	3.37	3.14	2.86							
155	2.39	2.34	2.37	2.47	2.72	2.99	3.20	3.19	3.09	2.93	2.78	2.60							
160	2.21	2.22	2.25	2.31	2.46	2.60	2.70	2.64	2.54	2.42	2.34	2.28							
165	2.06	2.08	2.10	2.12	2.16	2.19	2.20	2.15	2.10	2.04	2.03	2.03							
170	1.93	1.95	1.97	1.98	1.97	1.96	1.93	1.89	1.86	1.83	1.84	1.87							
175	1.84	1.84	1.84	1.83	1.83	1.83	1.81	1.78	1.75	1.73	1.75	1.78							
180	1.83	1.82	1.81	1.79	1.78	1.77	1.76	1.75	1.75	1.76	1.77	1.80							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: