
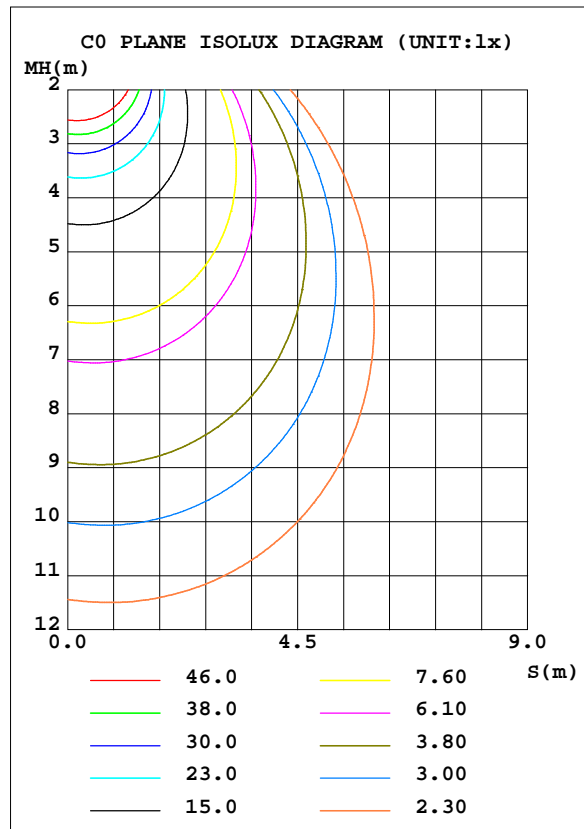


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.90V I:0.0370A P:8.1100W PF:0.9300 Freq:50.00Hz		
Lamp Flux:804.954x1 lm		
Name: NS31-450MM-7W	Type: LED	
MFR.: Lumega Group	DIM.: 450*45*70mm	
	SUR.: 430*30mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 99.25 lm/W			
MODEL		I _{max} (cd)	311.7	S/MH(C0/180)	1.41
NOMINAL POWER(W)	7	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	804.95	η UP, DN(C0-180)	1.5,50.8
NOMINAL FLUX(lm)	804.954	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.7,46.1
LAMPS INSIDE	1	η up(%)	3.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	221.6	η down(%)	96.8	CIBSE SHR MAX	1.35

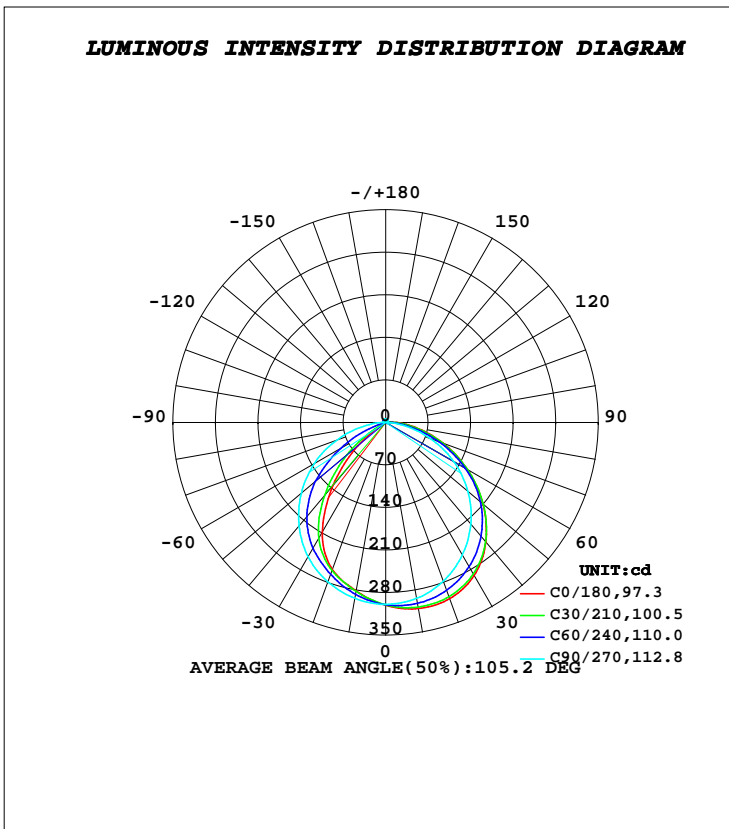

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	310.8	305.3	293.9	283.4	281.6	284.6	293.7	304.5	0- 10	28.36	28.36	3.52,3.52
20	308.5	299.4	277.8	260.7	257.2	262.5	279.1	299.0	10- 20	81.54	109.9	13.7,13.7
30	291.1	281.3	252.1	226.1	208.8	229.8	255.4	282.3	20- 30	123.9	233.8	29,29
40	256.4	250.2	218.1	172.8	134.4	179.1	222.0	252.3	30- 40	146.4	380.1	47.2,47.2
50	209.3	206.8	176.9	108.0	60.22	117.5	181.3	209.9	40- 50	143.5	523.6	65.1,65.1
60	155.9	153.7	129.8	40.49	1.963	50.41	136.1	157.3	50- 60	116.4	640.1	79.5,79.5
70	101.2	96.84	78.85	5.629	1.304	13.06	86.22	101.5	60- 70	78.88	719.0	89.3,89.3
80	51.04	44.45	29.84	1.378	1.529	3.296	36.86	49.34	70- 80	43.56	762.5	94.7,94.7
90	17.37	12.02	2.687	1.680	2.018	2.857	4.149	14.88	80- 90	16.74	779.3	96.8,96.8
100	4.658	3.321	3.010	2.251	2.657	3.320	4.633	4.763	90-100	5.422	784.7	97.5,97.5
110	2.240	1.943	2.624	2.875	3.340	3.892	3.621	3.075	100-110	3.307	788.0	97.9,97.9
120	1.844	2.290	3.107	3.542	3.993	4.367	3.902	3.143	110-120	3.036	791.0	98.3,98.3
130	2.629	2.939	3.722	4.186	4.576	4.815	4.305	3.589	120-130	3.204	794.2	98.7,98.7
140	3.371	3.584	4.339	4.781	5.075	5.194	4.707	4.042	130-140	3.187	797.4	99.1,99.1
150	4.055	4.275	4.963	5.328	5.492	5.569	5.212	4.578	140-150	2.921	800.3	99.4,99.4
160	4.829	5.033	5.564	5.816	5.897	5.920	5.695	5.182	150-160	2.404	802.7	99.7,99.7
170	5.663	5.742	6.069	6.188	6.207	6.189	6.099	5.800	160-170	1.623	804.4	99.9,99.9
180	6.192	6.218	6.315	6.245	6.202	6.216	6.313	6.246	170-180	0.5821	805.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.90V I:0.0370A P:8.1100W PF:0.9300 Freq:50.00Hz		
Lamp Flux:804.954x1 lm		
Name: NS31-450MM-7W	Type: LED	
MFR.: Lumega Group	DIM.: 450*45*70mm	
	SUR.: 430*30mm	

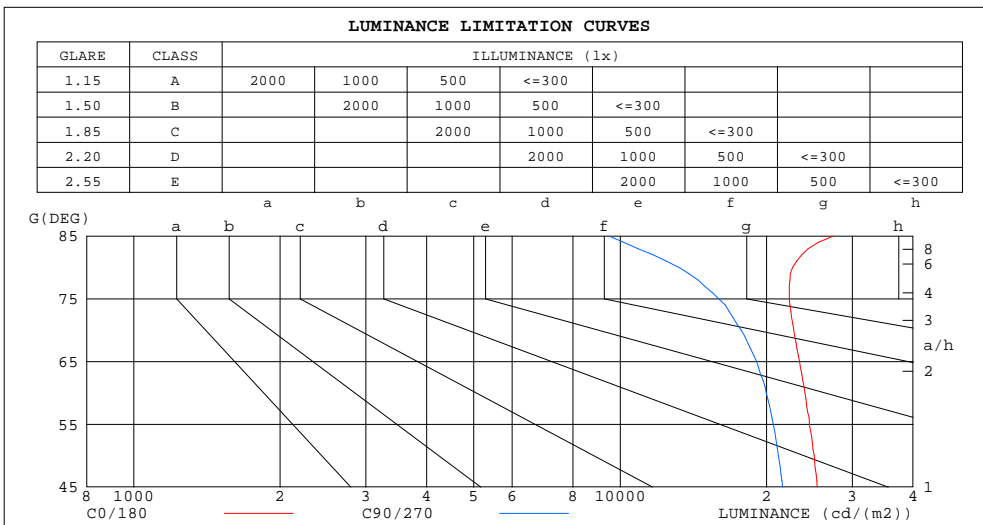

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	27422	9508
80	22611	13218
75	22258	15963
70	22751	17734
65	23379	19075
60	23988	19977
55	24519	20658
50	25050	21167
45	25402	21581


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.90V I:0.0370A P:8.1100W PF:0.9300 Freq:50.00Hz		
Lamp Flux:804.954x1 lm		
Name: NS31-450MM-7W	Type: LED	
MFR.: Lumega Group	DIM.: 450*45*70mm	
	SUR.: 430*30mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.04	.00	.96	1.01	.98	.94	.96	.93	.91	.92	.90	.87	.88	.86	.84	.82
2.0	.91	.85	.79	.89	.83	.78	.85	.80	.76	.81	.77	.73	.78	.74	.71	.69
3.0	.80	.73	.66	.79	.71	.66	.75	.69	.64	.72	.67	.63	.69	.65	.61	.59
4.0	.72	.63	.57	.70	.62	.56	.67	.60	.55	.65	.59	.54	.62	.57	.53	.51
5.0	.64	.56	.49	.63	.55	.49	.60	.53	.48	.58	.52	.47	.56	.51	.46	.44
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.53	.46	.42	.51	.45	.41	.39
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.48	.42	.37	.47	.41	.36	.34
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.34	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.31	.44	.36	.31	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.37	.31	.27	.25

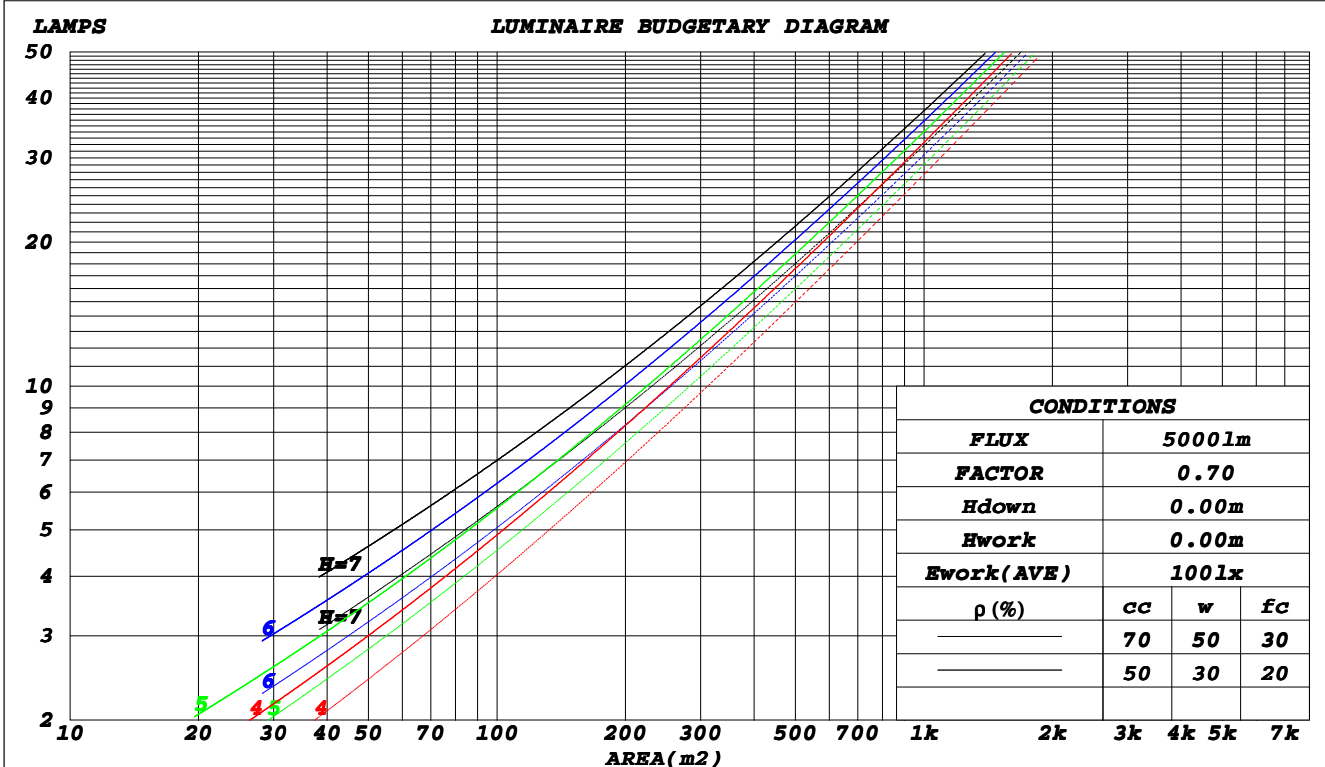

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:230.90V I:0.0370A P:8.1100W PF:0.9300 Freq:50.00Hz		
Lamp Flux:804.954x1 lm		
Name: NS31-450MM-7W	Type: LED	
MFR.: Lumega Group	DIM.: 450*45*70mm	
	SUR.: 430*30mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.296	.168	.053	.288	.164	.052	.273	.157	.050	.259	.150	.048	.247	.143	.046	
2.0	.278	.152	.047	.271	.149	.046	.258	.143	.044	.245	.138	.043	.234	.132	.042	
3.0	.258	.137	.041	.252	.135	.041	.240	.130	.039	.229	.125	.038	.219	.121	.037	
4.0	.239	.124	.036	.233	.122	.036	.223	.118	.035	.213	.114	.035	.204	.111	.034	
5.0	.222	.113	.033	.217	.111	.032	.207	.108	.032	.199	.105	.031	.190	.102	.031	
6.0	.206	.103	.030	.202	.102	.029	.193	.099	.029	.186	.096	.028	.178	.094	.028	
7.0	.192	.095	.027	.189	.094	.027	.181	.091	.026	.174	.089	.026	.167	.087	.026	
8.0	.180	.088	.025	.177	.087	.025	.170	.085	.024	.163	.083	.024	.157	.081	.024	
9.0	.169	.082	.023	.166	.081	.023	.160	.079	.022	.154	.077	.022	.149	.075	.022	
10.0	.160	.076	.021	.157	.076	.021	.151	.074	.021	.146	.072	.021	.141	.071	.020	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.215	.215	.215	.184	.184	.184	.125	.125	.125	.072	.072	.072	.023	.023	.023	
1.0	.204	.181	.160	.174	.155	.138	.119	.107	.095	.069	.062	.055	.022	.020	.018	
2.0	.195	.157	.124	.167	.135	.108	.114	.093	.075	.066	.054	.044	.021	.018	.014	
3.0	.187	.139	.101	.160	.120	.087	.110	.083	.061	.064	.049	.036	.020	.016	.012	
4.0	.179	.126	.085	.154	.109	.074	.106	.076	.052	.061	.044	.031	.020	.014	.010	
5.0	.172	.115	.073	.148	.100	.064	.102	.070	.045	.059	.041	.027	.019	.013	.009	
6.0	.165	.107	.065	.142	.093	.057	.098	.065	.040	.057	.038	.024	.018	.012	.008	
7.0	.158	.100	.059	.136	.087	.052	.094	.061	.037	.055	.036	.022	.018	.012	.007	
8.0	.152	.094	.055	.131	.082	.048	.090	.057	.034	.053	.034	.020	.017	.011	.007	
9.0	.146	.089	.051	.126	.078	.044	.087	.054	.032	.051	.032	.019	.016	.011	.006	
10.0	.141	.085	.048	.121	.074	.042	.084	.052	.030	.049	.031	.018	.016	.010	.006	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.90V I:0.0370A P:8.1100W PF:0.9300 Freq:50.00Hz		
Lamp Flux:804.954x1 lm		
Name: NS31-450MM-7W	Type: LED	
MFR.: Lumega Group	DIM.: 450*45*70mm	
	SUR.: 430*30mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.7	26.2	25.0	26.4	26.7	24.1	25.6	24.5	25.8	26.1
3H	26.3	27.7	26.7	27.9	28.2	25.5	26.8	25.9	27.1	27.4
4H	27.0	28.3	27.4	28.6	28.9	26.1	27.3	26.4	27.6	27.9
6H	27.6	28.8	28.0	29.1	29.5	26.4	27.5	26.8	27.9	28.2
8H	27.9	29.0	28.3	29.3	29.7	26.5	27.6	26.8	27.9	28.3
12H	28.1	29.2	28.5	29.5	29.9	26.5	27.6	26.9	27.9	28.3
4H 2H	25.3	26.6	25.7	26.9	27.2	24.9	26.1	25.2	26.4	26.8
3H	27.1	28.2	27.5	28.6	28.9	26.5	27.6	26.9	27.9	28.3
4H	28.0	28.9	28.4	29.3	29.7	27.1	28.1	27.5	28.5	28.9
6H	28.7	29.6	29.1	30.0	30.4	27.6	28.4	28.0	28.8	29.3
8H	29.0	29.8	29.5	30.3	30.7	27.7	28.5	28.1	28.9	29.4
12H	29.3	30.1	29.8	30.5	31.0	27.8	28.5	28.2	28.9	29.4
8H 4H	28.2	29.0	28.7	29.5	29.9	27.5	28.3	27.9	28.7	29.2
6H	29.1	29.8	29.6	30.3	30.8	28.1	28.8	28.6	29.2	29.7
8H	29.6	30.2	30.1	30.7	31.2	28.3	28.9	28.8	29.4	29.9
12H	30.0	30.5	30.6	31.0	31.6	28.4	29.0	29.0	29.5	30.0
12H 4H	28.2	29.0	28.7	29.4	29.9	27.5	28.3	28.0	28.7	29.2
6H	29.2	29.8	29.7	30.3	30.8	28.2	28.8	28.7	29.3	29.8
8H	29.7	30.2	30.2	30.7	31.3	28.5	29.0	29.0	29.5	30.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.4				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.6				

CIE Pub.117, 805.0 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.8)
 Area: 0.013 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.90V I:0.0370A P:8.1100W PF:0.9300 Freq:50.00Hz Lamp Flux:804.954x1 lm		
Name: NS31-450MM-7W	Type: LED	
MFR.: Lumega Group	DIM.: 450*45*70mm	
	SUR.: 430*30mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	48	41	58	47	41	57	47	41	34
0.80	69	58	51	68	57	50	66	56	50	43
1.00	77	66	59	76	66	59	73	67	58	51
1.25	84	74	67	82	73	67	80	71	66	58
1.50	89	79	73	87	78	72	84	76	71	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	82	74
3.00	102	96	90	100	94	89	95	90	86	77
4.00	106	100	96	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.90V I:0.0370A P:8.1100W PF:0.9300 Freq:50.00Hz		
Lamp Flux:804.954x1 l m		
Name: NS31-450MM-7W	Type: LED	
MFR.: Lumega Group	DIM.: 450*45*70mm	
	SUR.: 430*30mm	

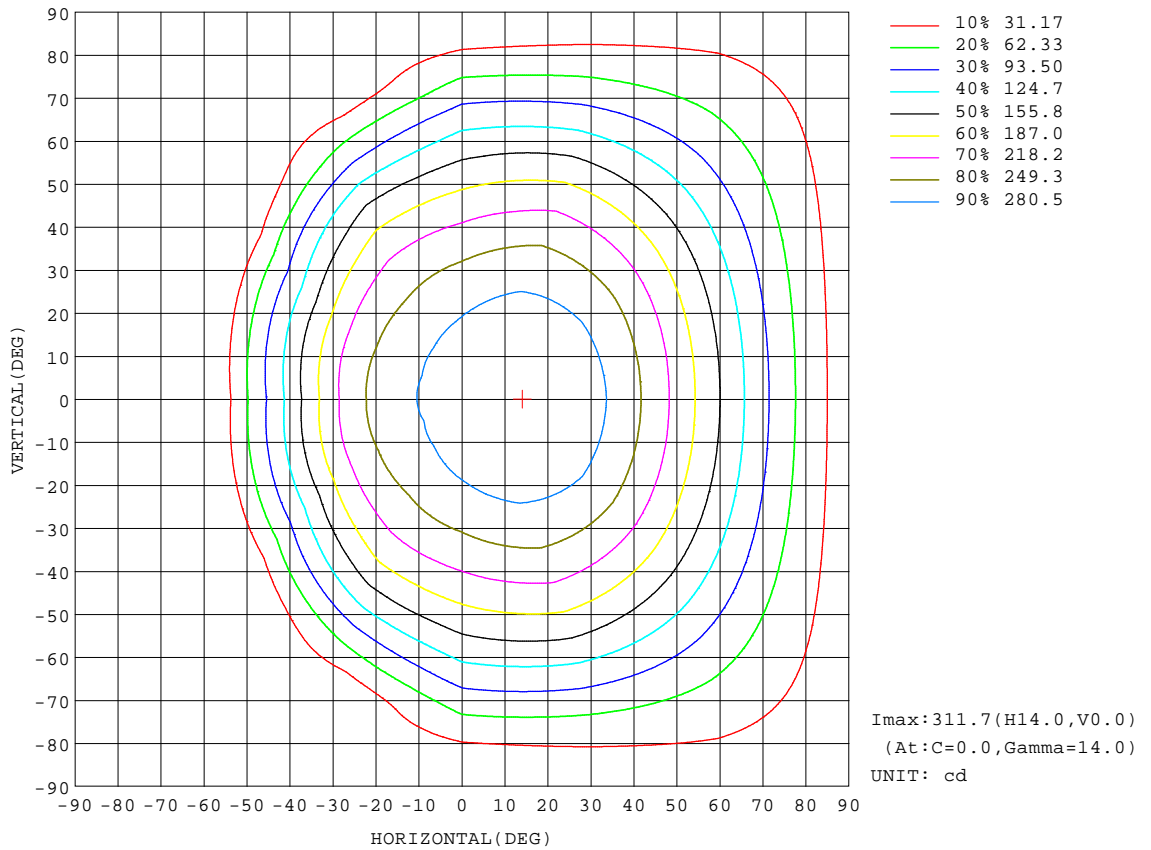


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:230.90V I:0.0370A P:8.1100W PF:0.9300 Freq:50.00Hz		
Lamp Flux:804.954x1 lm		
Name: NS31-450MM-7W	Type: LED	
MFR.: Lumega Group	DIM.: 450*45*70mm	
	SUR.: 430*30mm	

Flux out:510.1 lm

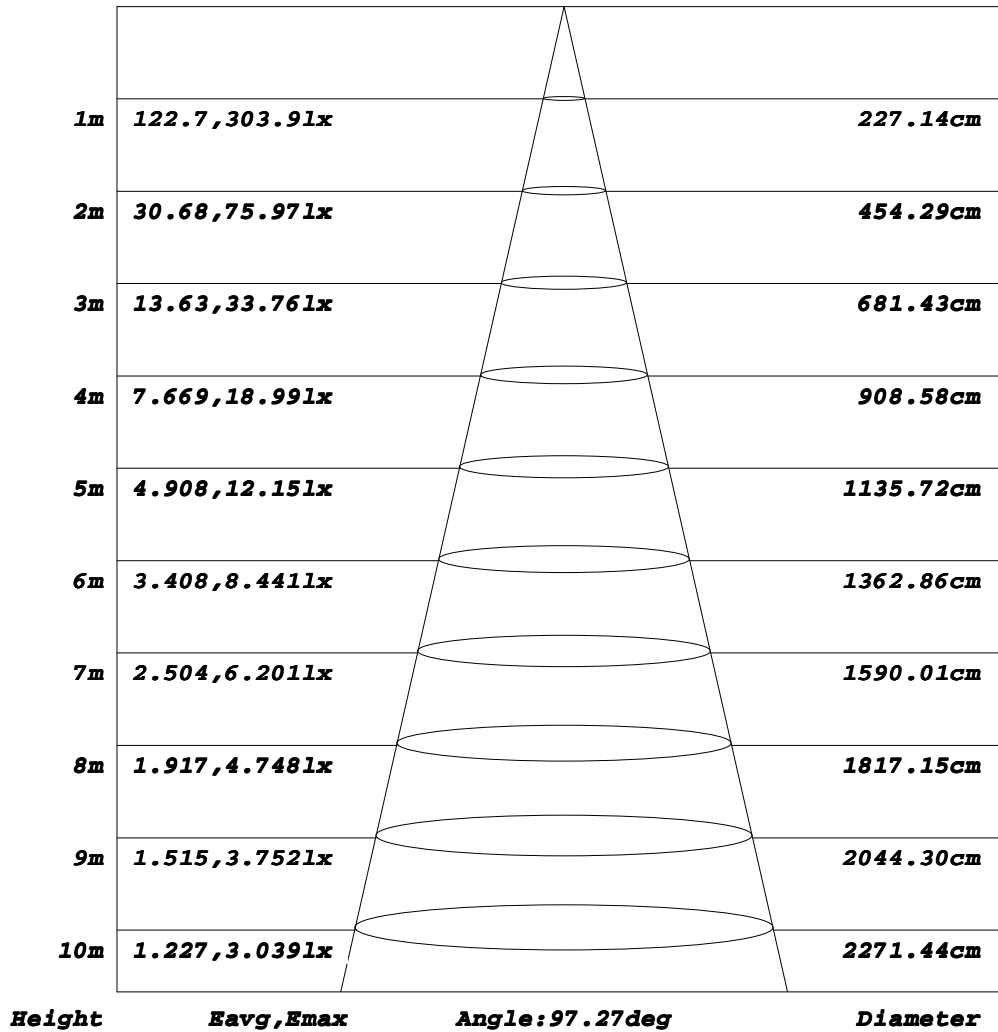


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:230.90V I:0.0370A P:8.1100W PF:0.9300 Freq:50.00Hz		
Lamp Flux:804.954x1 lm		
Name: NS31-450MM-7W	Type: LED	
MFR.: Lumega Group	DIM.: 450*45*70mm	
	SUR.: 430*30mm	

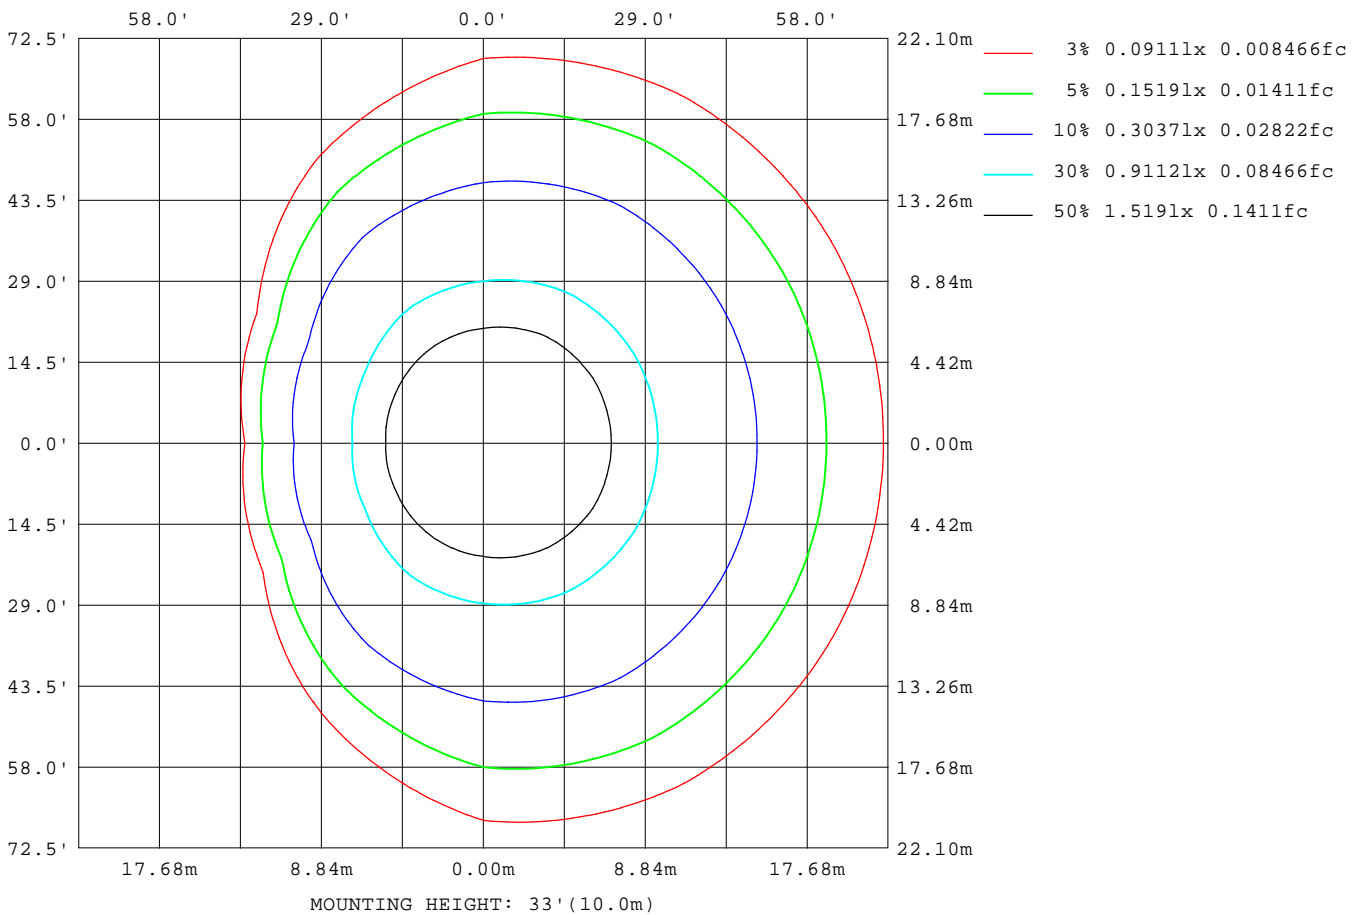

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

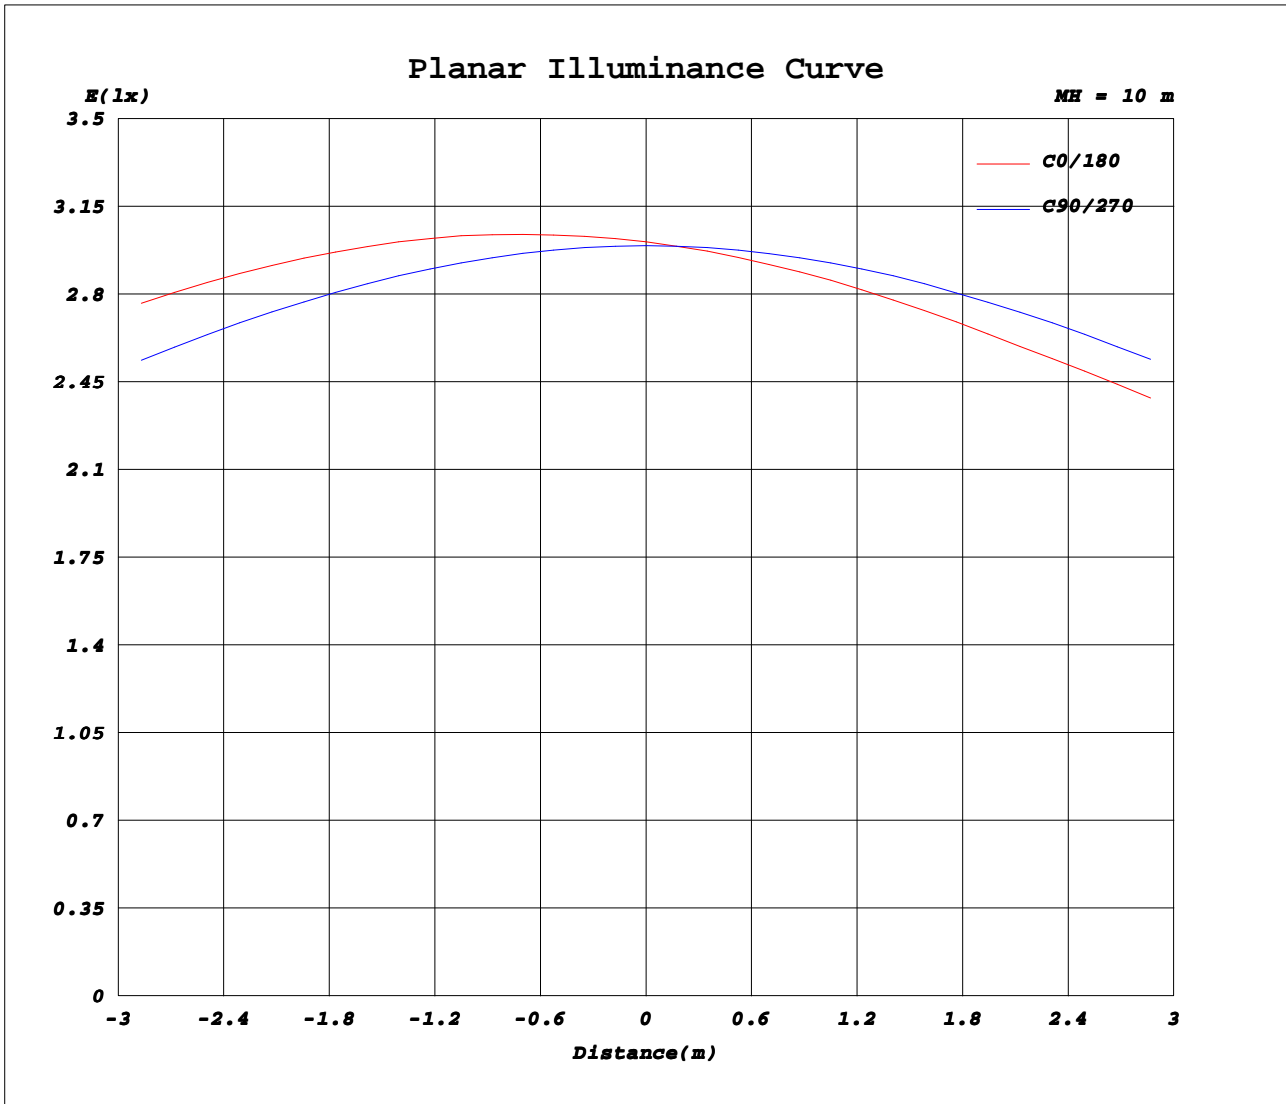

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.90V I:0.0370A P:8.1100W PF:0.9300 Freq:50.00Hz Lamp Flux:804.954x1 lm		
Name: NS31-450MM-7W	Type: LED	
MFR.: Lumega Group	DIM.: 450*45*70mm	
	SUR.: 430*30mm	

Table--1

UNIT: cd

C(DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	301	300	300	299	299	299	301	300	300	299	299	299							
5	307	306	302	298	294	291	292	292	295	298	302	304							
10	311	309	302	294	286	281	282	282	287	294	302	307							
15	311	308	299	287	276	270	271	271	277	287	299	307							
20	308	305	294	278	264	258	257	259	266	279	294	304							
25	302	298	285	266	250	241	237	243	253	269	287	298							
30	291	288	274	252	235	217	209	220	239	255	277	288							
35	276	274	261	236	217	186	173	191	222	240	264	274							
40	256	256	244	218	195	150	134	156	202	222	248	256							
45	234	234	225	198	169	113	96.6	120	178	202	229	235							
50	209	210	204	177	139	76.8	60.2	83.9	151	181	209	211							
55	183	183	179	154	106	40.3	22.5	47.9	119	159	184	185							
60	156	156	152	130	72.1	8.86	1.96	15.2	85.6	136	157	158							
65	128	128	123	105	39.9	1.02	1.27	3.00	54.3	112	129	131							
70	101	100	93.4	78.8	10.3	0.93	1.30	2.63	23.5	86.2	99.9	103							
75	74.9	73.4	65.1	53.7	2.00	1.00	1.39	2.42	5.75	61.1	71.9	76.6							
80	51.0	49.3	39.6	29.8	1.61	1.14	1.53	2.31	4.29	36.9	46.4	52.3							
85	31.1	28.9	20.3	10.8	1.59	1.34	1.73	2.30	3.50	16.5	25.4	31.7							
90	17.4	15.3	8.78	2.69	1.77	1.59	2.02	2.48	3.24	4.15	12.3	17.5							
95	9.14	7.73	3.96	3.36	2.02	1.89	2.32	2.75	3.40	4.56	6.14	9.38							
100	4.66	4.12	2.52	3.01	2.28	2.22	2.66	3.04	3.60	4.63	4.27	5.26							
105	3.12	2.85	1.84	2.79	2.55	2.56	3.00	3.33	3.84	3.65	3.28	3.83							
110	2.24	1.88	2.00	2.62	2.84	2.91	3.34	3.63	4.16	3.62	3.26	2.89							
115	1.54	1.75	2.25	2.83	3.16	3.26	3.68	3.92	4.36	3.69	3.43	2.44							
120	1.84	2.06	2.52	3.11	3.48	3.61	3.99	4.20	4.54	3.90	3.61	2.67							
125	2.23	2.41	2.82	3.41	3.79	3.94	4.30	4.46	4.75	4.08	3.78	2.96							
130	2.63	2.77	3.11	3.72	4.11	4.27	4.58	4.71	4.92	4.30	3.92	3.26							
135	3.00	3.11	3.41	4.03	4.41	4.57	4.83	4.93	5.06	4.50	4.07	3.54							
140	3.37	3.43	3.73	4.34	4.70	4.86	5.07	5.14	5.25	4.71	4.28	3.80							
145	3.72	3.76	4.07	4.64	4.99	5.13	5.30	5.35	5.41	4.96	4.51	4.08							
150	4.06	4.12	4.43	4.96	5.27	5.38	5.49	5.55	5.58	5.21	4.77	4.39							
155	4.43	4.50	4.80	5.27	5.54	5.62	5.70	5.74	5.74	5.46	5.00	4.72							
160	4.83	4.90	5.17	5.56	5.79	5.84	5.90	5.91	5.93	5.70	5.30	5.07							
165	5.26	5.30	5.51	5.84	6.01	6.05	6.07	6.06	6.10	5.91	5.60	5.42							
170	5.66	5.65	5.83	6.07	6.18	6.19	6.21	6.16	6.22	6.10	5.87	5.73							
175	5.98	5.95	6.10	6.24	6.29	6.27	6.23	6.19	6.27	6.22	6.08	5.99							
180	6.19	6.17	6.26	6.31	6.27	6.22	6.20	6.17	6.27	6.31	6.27	6.22							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: