
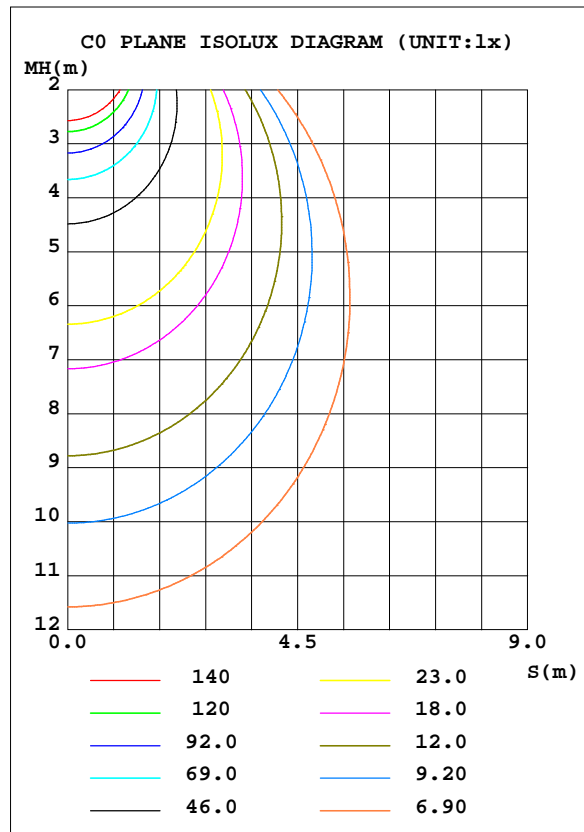


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.80V I:0.0940A P:20.300W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2642.05x1 lm		
Name: NS40-φ300MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 130.15 lm/W			
MODEL		I _{max} (cd)	925.1	S/MH(C0/180)	1.24
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2642.0	η UP, DN(C0-180)	1.1,49.3
NOMINAL FLUX(lm)	2642.05	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3,48.3
LAMPS INSIDE	1	η up(%)	2.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	221.6	η down(%)	97.6	CIBSE SHR MAX	1.35

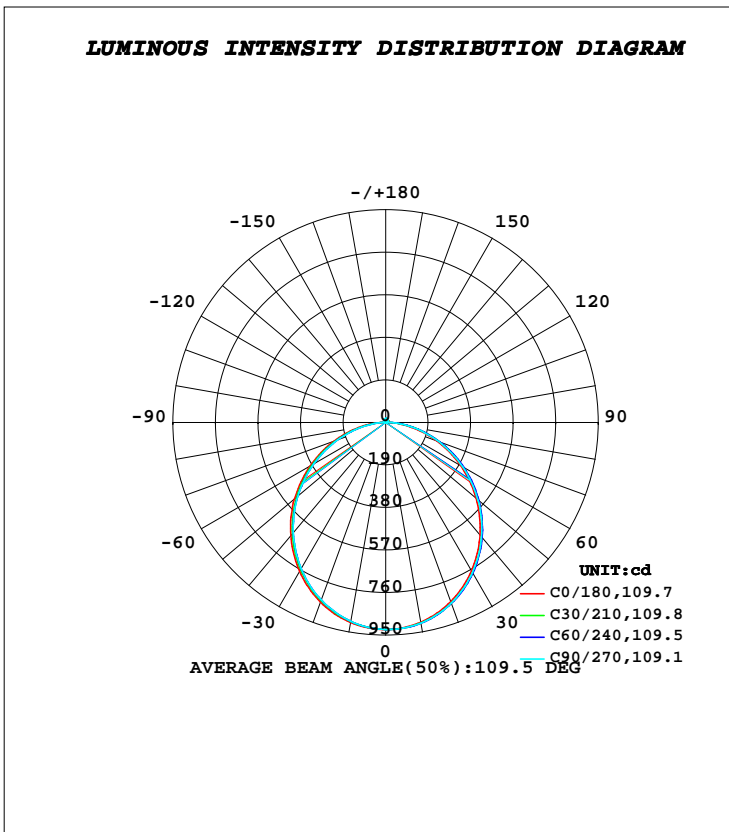

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	905.7	909.7	909.6	905.5	906.9	902.2	901.4	906.6	0- 10	87.38	87.38	3.31,3.31
20	851.4	858.9	857.9	850.0	853.3	844.9	843.3	852.4	10- 20	249.1	336.5	12.7,12.7
30	765.8	776.8	774.8	763.4	768.7	757.4	755.3	767.3	20- 30	374.3	710.8	26.9,26.9
40	656.1	669.4	666.5	652.4	659.3	645.9	642.7	657.5	30- 40	446.5	1157	43.8,43.8
50	528.1	542.6	538.2	522.3	532.9	516.5	512.7	529.9	40- 50	458.1	1615	61.1,61.1
60	388.1	402.8	397.6	381.1	390.7	375.1	371.4	389.2	50- 60	409.5	2025	76.6,76.6
70	243.9	259.0	254.1	237.0	247.2	232.0	228.2	245.6	60- 70	311.9	2337	88.4,88.4
80	107.5	121.8	118.3	102.7	112.7	99.31	95.41	110.5	70- 80	184.0	2521	95.4,95.4
90	4.259	9.333	8.598	4.191	5.811	5.841	5.806	6.599	80- 90	56.72	2577	97.6,97.6
100	5.732	5.514	5.478	5.661	7.090	7.280	7.335	7.075	90-100	6.216	2584	97.8,97.8
110	7.547	7.343	7.446	7.415	8.741	9.009	9.261	8.856	100-110	7.696	2591	98.1,98.1
120	9.424	9.262	9.199	9.270	10.46	10.74	10.99	10.61	110-120	9.005	2600	98.4,98.4
130	11.28	11.13	10.95	11.06	12.10	12.34	12.50	12.34	120-130	9.725	2610	98.8,98.8
140	12.97	12.83	12.65	12.73	13.65	13.79	13.92	13.87	130-140	9.679	2620	99.2,99.2
150	14.56	14.39	14.25	14.30	14.99	15.07	15.15	15.16	140-150	8.791	2629	99.5,99.5
160	16.14	15.87	15.81	15.87	16.32	16.24	16.25	16.29	150-160	7.118	2636	99.8,99.8
170	17.45	17.23	17.21	17.31	17.49	17.27	17.24	17.25	160-170	4.716	2640	99.9,99.9
180	18.07	17.83	17.82	17.84	18.07	17.83	17.81	17.84	170-180	1.678	2642	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.80V I:0.0940A P:20.300W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2642.05x1 lm		
Name: NS40-φ300MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

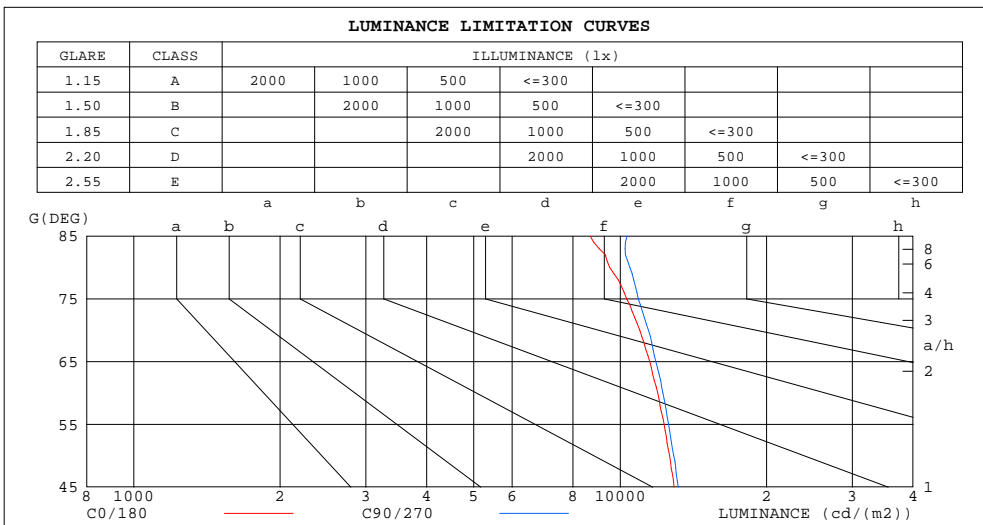

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8673	10326
80	9524	10478
75	10319	10897
70	10970	11432
65	11501	11846
60	11940	12233
55	12308	12570
50	12639	12882
45	12903	13156


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.80V I:0.0940A P:20.300W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2642.05x1 lm		
Name: NS40-φ300MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio									Coefficients of Utilization(CU)						
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.81
2.0	.90	.83	.77	.88	.81	.76	.84	.79	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.79	.71	.64	.77	.70	.63	.74	.67	.62	.71	.65	.61	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.55	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.54	.49	.44	.42
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.39	.49	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.41	.35	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.35	.30	.25	.24

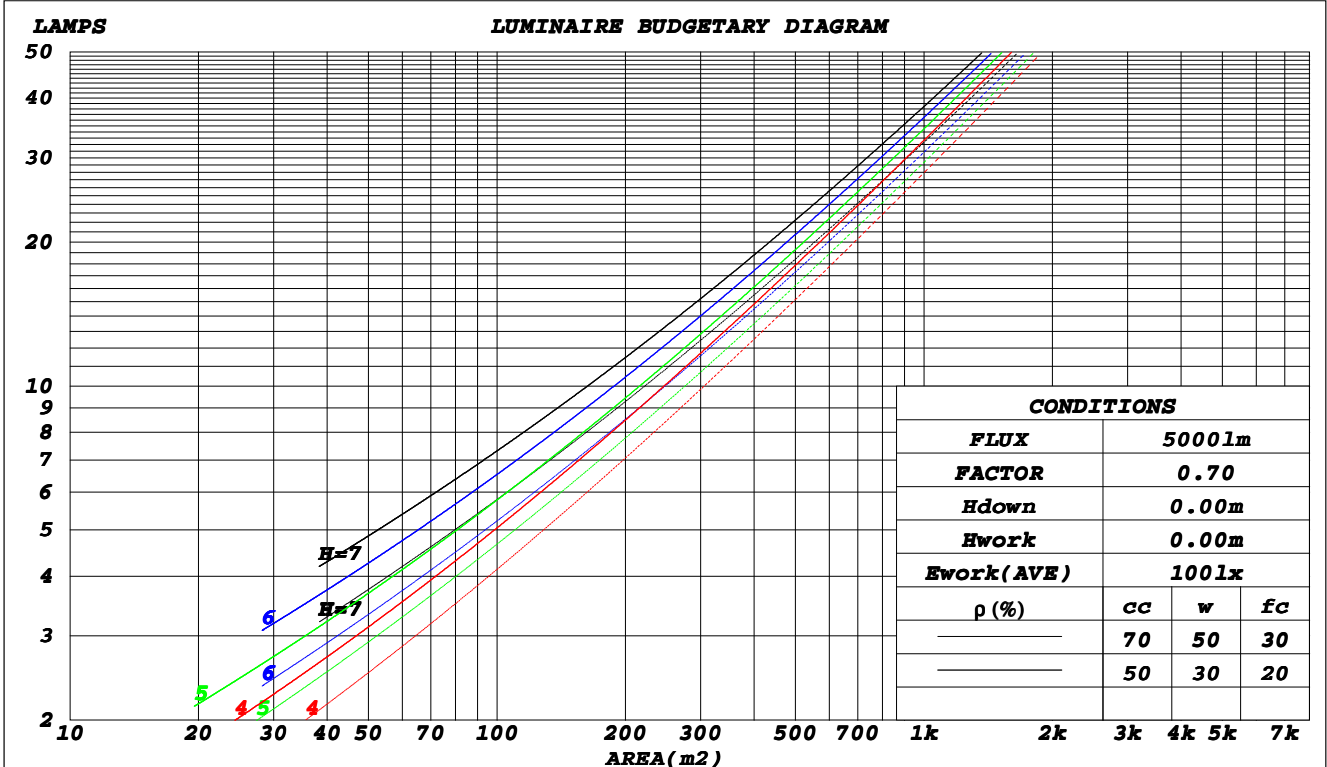

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.80V I:0.0940A P:20.300W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2642.05x1 lm		
Name: NS40-φ300MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.311	.177	.056	.303	.173	.055	.289	.166	.053	.275	.159	.051	.263	.152	.049	
2.0	.291	.160	.049	.284	.157	.048	.271	.151	.047	.259	.146	.046	.248	.141	.044	
3.0	.269	.143	.043	.263	.141	.042	.251	.136	.041	.241	.132	.040	.231	.128	.040	
4.0	.248	.129	.038	.243	.127	.038	.232	.123	.037	.223	.120	.036	.214	.116	.035	
5.0	.229	.117	.034	.224	.115	.034	.215	.112	.033	.207	.109	.032	.199	.106	.032	
6.0	.212	.107	.030	.208	.105	.030	.200	.102	.030	.192	.100	.029	.185	.097	.029	
7.0	.198	.098	.028	.194	.097	.028	.186	.094	.027	.180	.092	.027	.173	.090	.026	
8.0	.185	.090	.025	.181	.089	.025	.175	.087	.025	.168	.085	.025	.162	.083	.024	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	
10.0	.163	.078	.022	.160	.077	.022	.154	.076	.021	.149	.074	.021	.144	.073	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.199	.175	.153	.170	.150	.132	.117	.103	.091	.067	.060	.053	.021	.019	.017	
2.0	.191	.151	.117	.164	.130	.101	.112	.090	.071	.065	.052	.041	.021	.017	.013	
3.0	.183	.133	.093	.157	.115	.081	.108	.080	.057	.062	.047	.033	.020	.015	.011	
4.0	.176	.120	.078	.151	.104	.067	.104	.072	.047	.060	.042	.028	.019	.014	.009	
5.0	.168	.110	.067	.144	.095	.058	.100	.066	.041	.058	.039	.024	.019	.013	.008	
6.0	.161	.101	.059	.138	.088	.051	.096	.061	.036	.055	.036	.021	.018	.012	.007	
7.0	.154	.095	.053	.133	.082	.046	.092	.057	.032	.053	.034	.019	.017	.011	.006	
8.0	.148	.089	.048	.127	.077	.042	.088	.054	.030	.051	.032	.018	.017	.010	.006	
9.0	.142	.084	.045	.122	.073	.039	.085	.051	.028	.049	.030	.016	.016	.010	.005	
10.0	.136	.080	.042	.117	.069	.037	.081	.049	.026	.047	.029	.015	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.80V I:0.0940A P:20.300W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2642.05x1 lm		
Name: NS40-φ300MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.5	23.0	21.8	23.3	23.5	21.6	23.1	21.9	23.4	23.6
3H	23.1	24.4	23.4	24.7	25.0	23.2	24.6	23.5	24.8	25.1
4H	23.7	25.0	24.0	25.3	25.6	23.8	25.1	24.2	25.4	25.7
6H	24.1	25.4	24.5	25.7	26.0	24.3	25.6	24.7	25.9	26.2
8H	24.3	25.5	24.7	25.8	26.2	24.5	25.7	24.9	26.0	26.4
12H	24.4	25.5	24.8	25.9	26.2	24.7	25.8	25.1	26.1	26.5
4H 2H	22.2	23.5	22.5	23.8	24.1	22.2	23.5	22.6	23.8	24.2
3H	23.9	25.0	24.3	25.4	25.7	24.0	25.1	24.4	25.5	25.8
4H	24.7	25.7	25.1	26.1	26.5	24.8	25.8	25.2	26.2	26.6
6H	25.3	26.2	25.7	26.6	27.0	25.4	26.4	25.9	26.8	27.2
8H	25.5	26.3	25.9	26.8	27.2	25.7	26.6	26.1	27.0	27.4
12H	25.6	26.4	26.1	26.9	27.3	25.9	26.7	26.4	27.1	27.6
8H 4H	25.0	25.8	25.4	26.3	26.7	25.1	26.0	25.5	26.4	26.8
6H	25.8	26.5	26.3	26.9	27.4	25.9	26.6	26.4	27.1	27.6
8H	26.1	26.7	26.6	27.2	27.7	26.3	26.9	26.8	27.4	27.9
12H	26.3	26.9	26.9	27.4	27.9	26.6	27.1	27.1	27.6	28.1
12H 4H	25.0	25.8	25.5	26.2	26.7	25.1	25.9	25.6	26.3	26.8
6H	25.9	26.5	26.4	27.0	27.5	26.0	26.6	26.5	27.1	27.6
8H	26.2	26.8	26.8	27.3	27.8	26.4	27.0	26.9	27.4	28.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 2642 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.4)
 Area: 0.065 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.80V I:0.0940A P:20.300W PF:0.9700 Freq:50.00Hz Lamp Flux:2642.05x1 lm		
Name: NS40-φ300MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	39	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	57	71	65	56	48
1.25	82	72	65	81	71	64	78	69	63	56
1.50	87	77	70	85	76	70	82	74	68	61
2.00	94	86	79	92	84	78	88	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	89	99	93	88	95	89	85	76
4.00	105	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.80V I:0.0940A P:20.300W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2642.05x1 lm		
Name: NS40-φ300MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

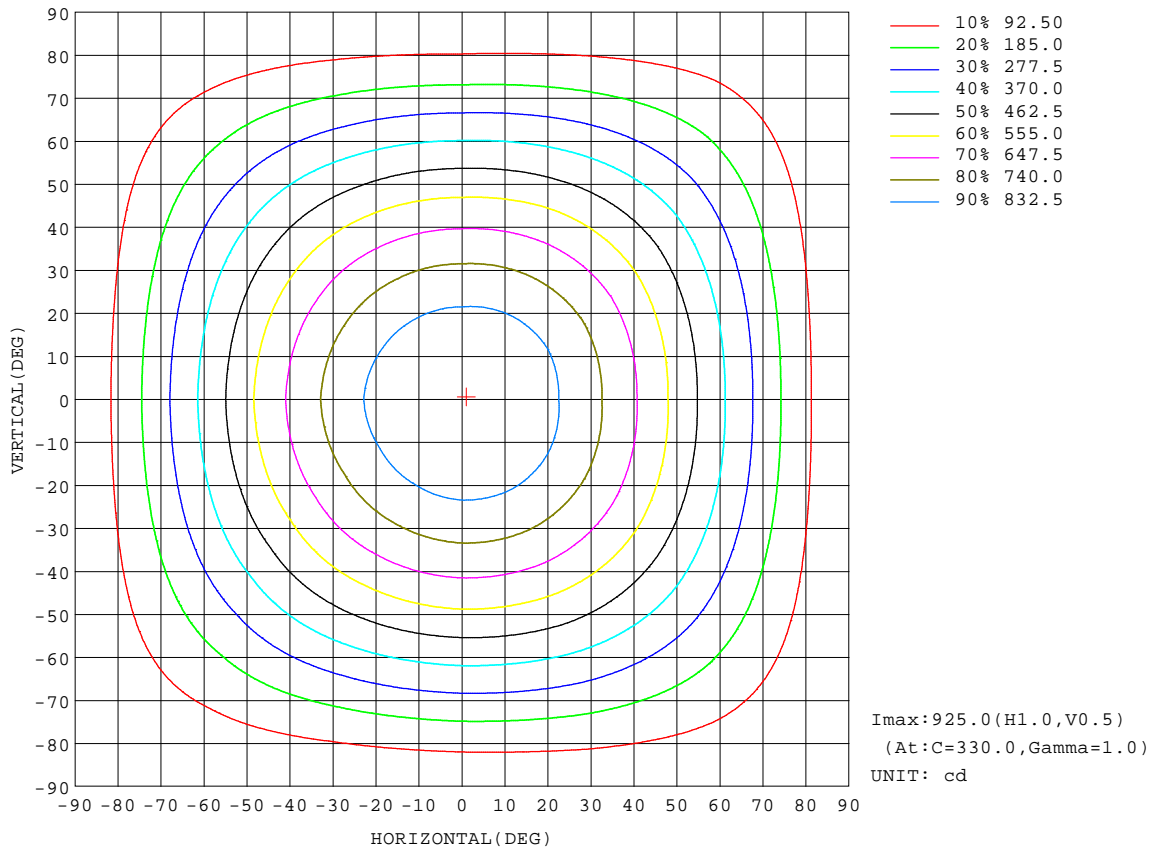


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.80V I:0.0940A P:20.300W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2642.05x1 lm		
Name: NS40-φ300MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

Flux out:1830 lm

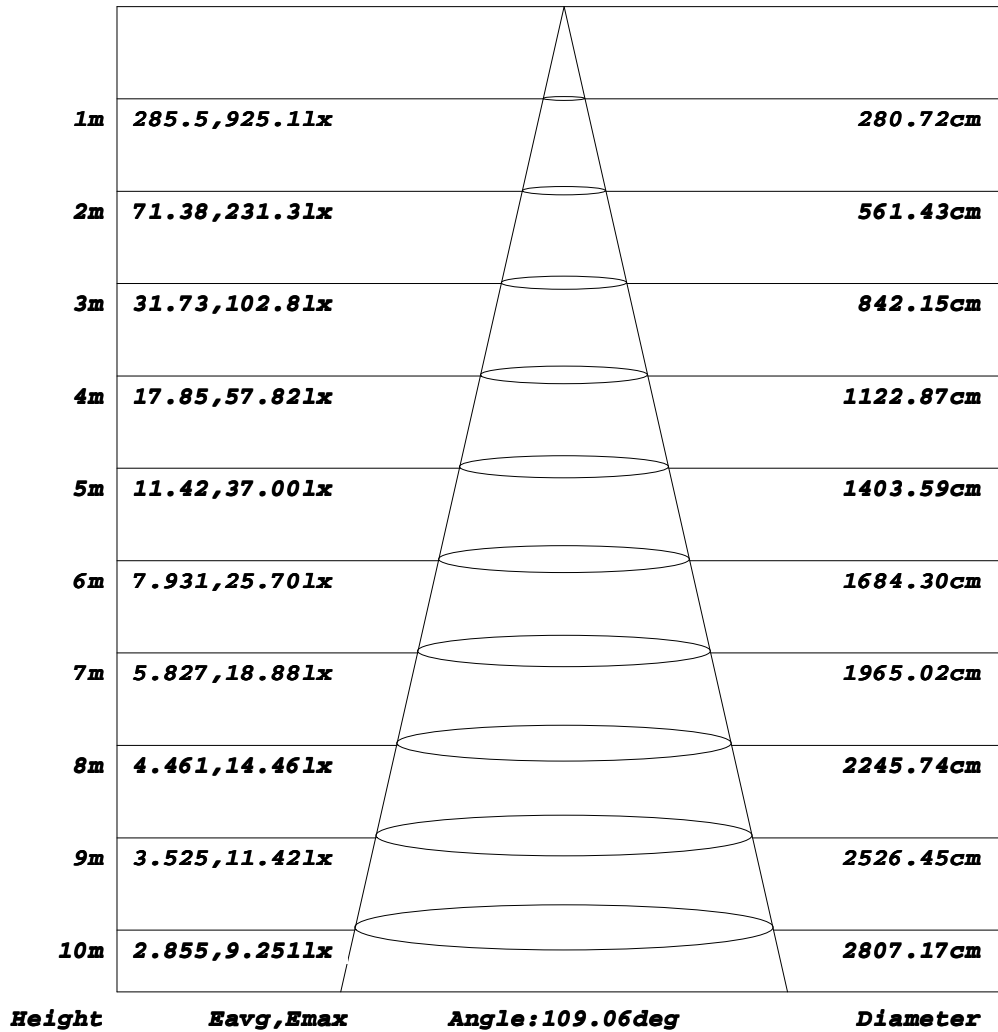


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.80V I:0.0940A P:20.300W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2642.05x1 lm		
Name: NS40-φ300MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

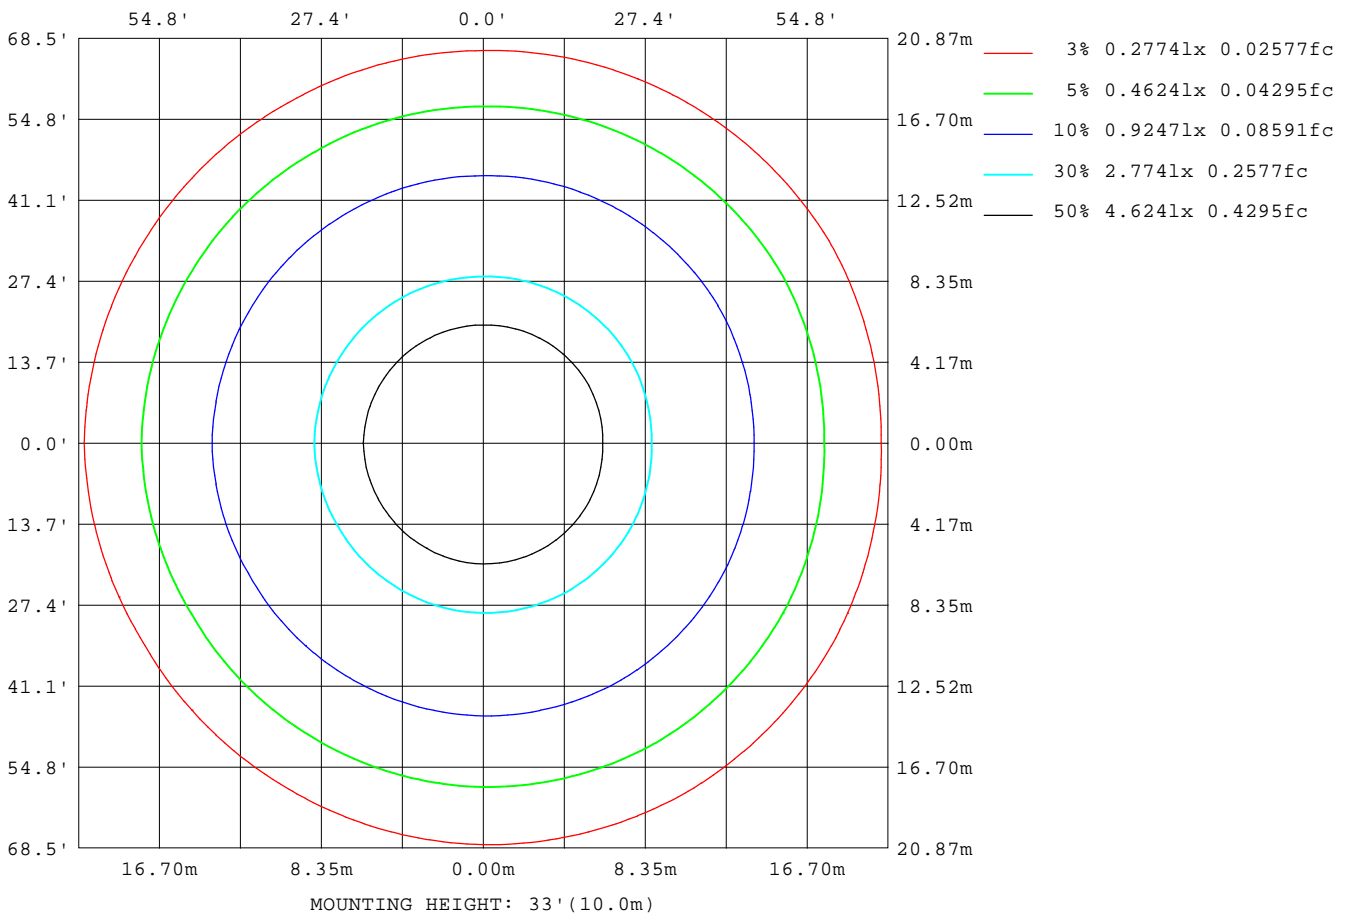

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

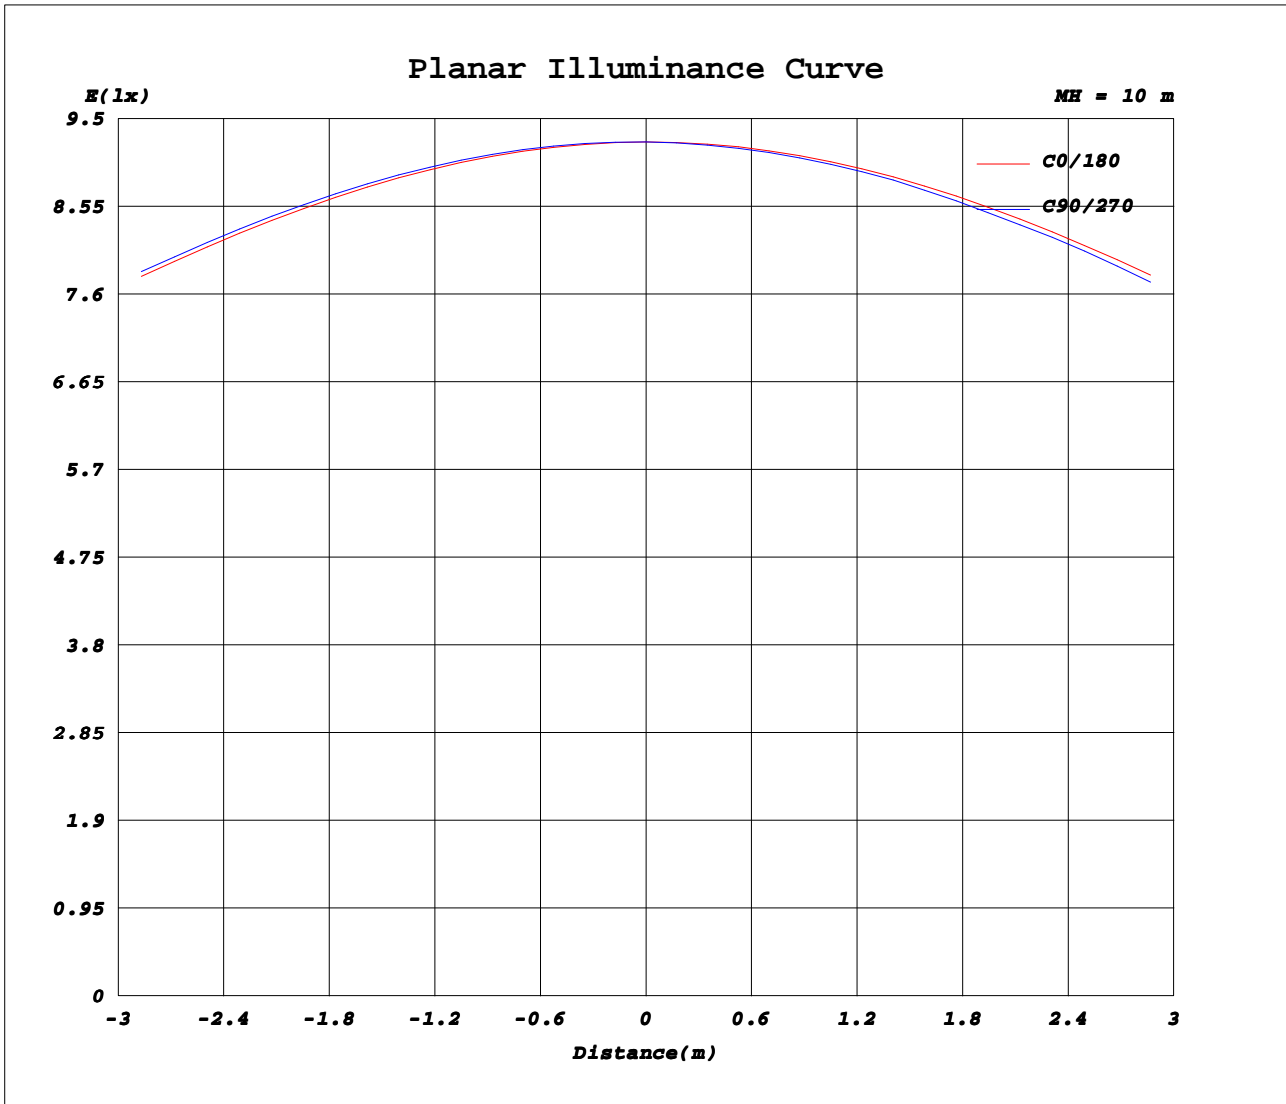

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.80V I:0.0940A P:20.300W PF:0.9700 Freq:50.00Hz Lamp Flux:2642.05x1 lm		
Name: NS40-φ300MM-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H68mm	
	SUR.: D280mm	

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	925	925	925	925	925	925	925	925	925	925	925	925							
5	920	921	922	922	920	920	920	918	918	918	920	921							
10	906	909	910	910	906	905	907	902	902	901	906	908							
15	883	888	890	888	884	881	885	879	877	877	882	886							
20	851	858	860	858	852	848	853	846	844	843	850	855							
25	812	820	823	820	812	808	815	807	803	803	810	817							
30	766	775	778	775	766	761	769	760	755	755	764	771							
35	714	725	727	724	713	708	717	707	701	701	711	719							
40	656	668	671	666	655	650	659	649	643	643	653	662							
45	593	607	608	605	591	587	598	586	580	579	591	600							
50	528	541	545	538	526	519	533	519	514	513	526	534							
55	459	472	476	469	456	449	462	450	443	443	455	466							
60	388	401	405	398	385	377	391	379	371	371	384	395							
65	316	329	333	325	313	305	319	308	300	300	311	324							
70	244	258	260	254	240	234	247	236	228	228	240	252							
75	174	187	189	183	170	165	178	166	160	159	170	181							
80	107	121	122	118	104	101	113	102	96.9	95.4	106	115							
85	49.1	60.0	62.2	58.5	47.7	43.1	53.4	43.2	39.7	39.4	48.9	56.1							
90	4.26	8.00	10.7	8.60	4.18	4.20	5.81	5.84	5.85	5.81	5.72	7.48							
95	4.93	4.77	4.68	4.66	4.80	4.93	6.35	6.51	6.53	6.49	6.36	6.31							
100	5.73	5.56	5.47	5.48	5.59	5.73	7.09	7.27	7.29	7.33	7.10	7.05							
105	6.68	6.45	6.39	6.47	6.46	6.59	7.92	8.10	8.15	8.29	7.97	7.89							
110	7.55	7.36	7.32	7.45	7.35	7.48	8.74	8.98	9.04	9.26	8.97	8.75							
115	8.46	8.31	8.29	8.33	8.30	8.37	9.57	9.77	9.99	10.1	9.83	9.60							
120	9.42	9.27	9.26	9.20	9.24	9.30	10.5	10.6	10.8	11.0	10.7	10.5							
125	10.4	10.2	10.2	10.1	10.1	10.2	11.3	11.5	11.6	11.8	11.6	11.4							
130	11.3	11.2	11.1	11.0	11.0	11.1	12.1	12.3	12.4	12.5	12.4	12.3							
135	12.1	12.1	11.9	11.8	11.9	11.9	12.9	13.1	13.1	13.2	13.2	13.1							
140	13.0	12.9	12.7	12.6	12.7	12.8	13.7	13.8	13.8	13.9	13.9	13.9							
145	13.7	13.7	13.5	13.4	13.5	13.5	14.3	14.4	14.5	14.6	14.5	14.5							
150	14.6	14.5	14.3	14.3	14.3	14.3	15.0	15.1	15.1	15.1	15.1	15.2							
155	15.4	15.2	15.0	15.0	15.1	15.1	15.7	15.7	15.7	15.7	15.7	15.8							
160	16.1	15.9	15.8	15.8	15.8	15.9	16.3	16.2	16.2	16.3	16.2	16.4							
165	16.8	16.6	16.5	16.5	16.6	16.6	16.9	16.8	16.8	16.8	16.7	16.8							
170	17.4	17.3	17.2	17.2	17.3	17.3	17.5	17.3	17.3	17.2	17.2	17.3							
175	17.9	17.7	17.7	17.7	17.7	17.8	17.9	17.7	17.6	17.6	17.6	17.7							
180	18.1	17.8	17.8	17.8	17.8	17.9	18.1	17.8	17.8	17.8	17.8	17.9							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: