
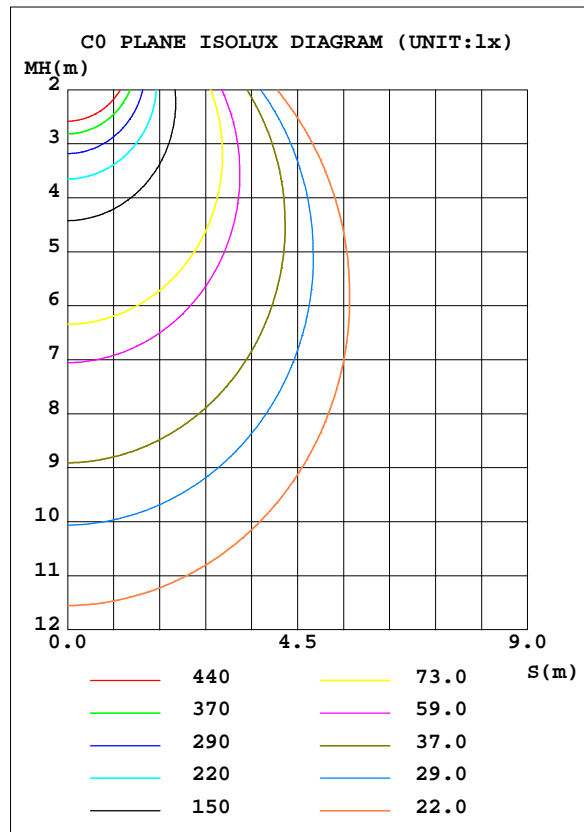


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.3270A P:69.600W PF:0.9680 Freq:50.00Hz		
Lamp Flux:8512.58x1 lm		
Name: NS40-φ735MM-70W	Type: LED	
MFR.: Lumega Group	DIM.: D735*H100mm	
	SUR.: D715mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 122.31 lm/W			
MODEL		I _{max} (cd)	2938	S/MH(C0/180)	1.24
NOMINAL POWER(W)	70	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	8512.6	η UP, DN(C0-180)	1.0,50.1
NOMINAL FLUX(lm)	8512.58	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.1,47.8
LAMPS INSIDE	1	η up(%)	2.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	221.6	η down(%)	97.9	CIBSE SHR MAX	1.35

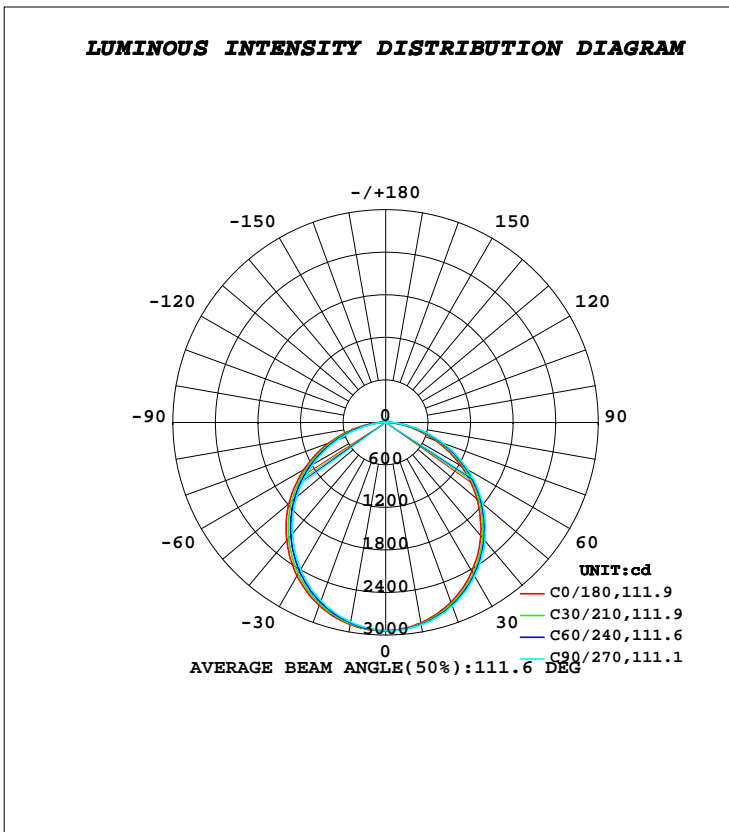

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2869	2888	2899	2901	2895	2874	2855	2856	0- 10	277.6	277.6	3.26,3.26
20	2696	2731	2752	2756	2745	2707	2673	2674	10- 20	793.2	1071	12.6,12.6
30	2430	2477	2507	2513	2500	2447	2398	2399	20- 30	1197	2268	26.6,26.6
40	2086	2144	2179	2188	2172	2107	2046	2048	30- 40	1438	3706	43.5,43.5
50	1683	1745	1785	1799	1785	1709	1638	1639	40- 50	1487	5193	61,61
60	1231	1300	1343	1353	1335	1258	1187	1187	50- 60	1343	6536	76.8,76.8
70	751.2	824.0	868.1	876.5	855.9	781.1	712.1	711.3	60- 70	1027	7563	88.8,88.8
80	298.5	355.9	392.1	403.2	390.1	325.5	264.9	264.0	70- 80	593.4	8157	95.8,95.8
90	14.46	36.26	49.71	52.08	47.42	33.63	19.53	14.46	80- 90	177.2	8334	97.9,97.9
100	18.81	17.32	17.29	19.67	22.34	23.46	23.51	21.81	90-100	21.70	8356	98.2,98.2
110	22.87	21.53	21.52	23.67	26.10	27.13	27.17	25.62	100-110	23.83	8380	98.4,98.4
120	26.20	24.95	24.94	27.00	29.31	30.30	30.34	28.84	110-120	25.92	8405	98.7,98.7
130	29.46	28.28	28.25	30.13	32.24	33.14	33.18	31.84	120-130	26.26	8432	99.1,99.1
140	32.66	31.61	31.58	33.22	35.07	35.88	35.93	34.76	130-140	25.00	8457	99.3,99.3
150	36.26	35.32	35.21	36.48	37.94	38.58	38.65	37.80	140-150	22.20	8479	99.6,99.6
160	39.76	39.07	38.98	39.87	40.89	41.27	41.27	40.72	150-160	17.87	8497	99.8,99.8
170	42.26	41.92	41.86	42.25	42.70	42.91	42.94	42.70	160-170	11.71	8508	100,100
180	43.14	43.10	43.09	43.14	43.18	43.13	43.07	43.08	170-180	4.086	8513	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.3270A P:69.600W PF:0.9680 Freq:50.00Hz Lamp Flux:8512.58x1 lm		
Name: NS40-φ735MM-70W	Type: LED	
MFR.: Lumega Group	DIM.: D735*H100mm	
	SUR.: D715mm	

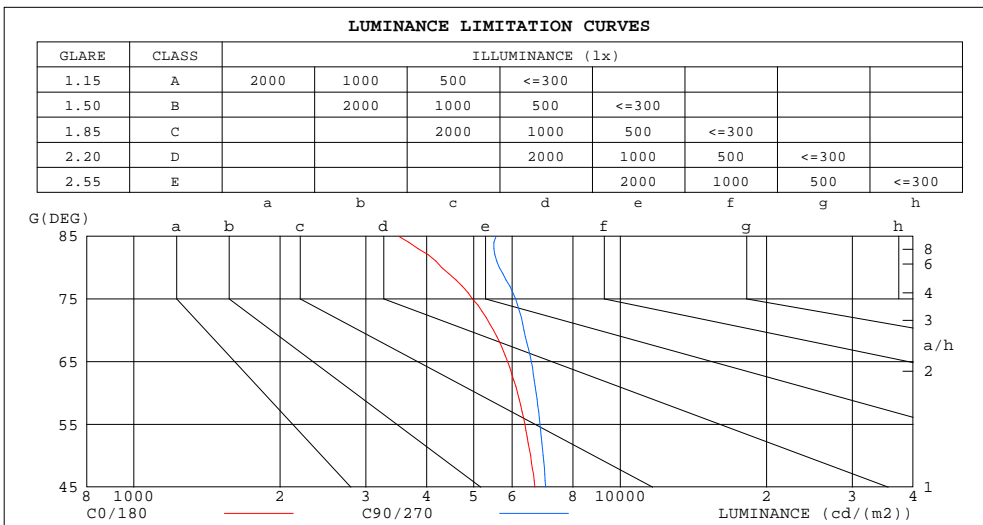

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	3501	5560
80	4297	5645
75	4972	6095
70	5491	6345
65	5872	6572
60	6153	6714
55	6370	6841
50	6545	6941
45	6674	7031


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.3270A P:69.600W PF:0.9680 Freq:50.00Hz		
Lamp Flux:8512.58x1 lm		
Name: NS40-φ735MM-70W	Type: LED	
MFR.: Lumega Group	DIM.: D735*H100mm	
	SUR.: D715mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.83	.77	.88	.81	.76	.84	.79	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.79	.71	.64	.77	.70	.63	.74	.67	.62	.71	.65	.61	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.55	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.54	.49	.44	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.36	.30	.26	.35	.30	.25	.24

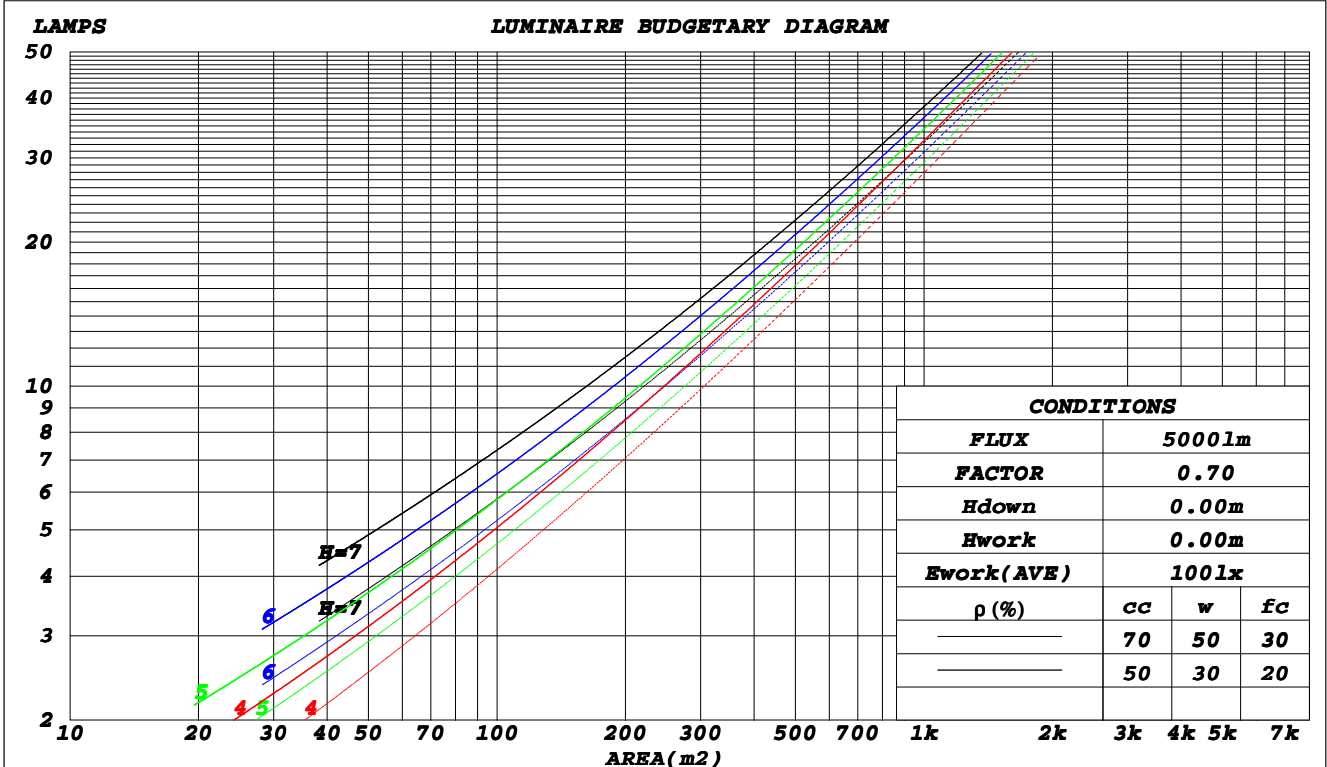

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.3270A P:69.600W PF:0.9680 Freq:50.00Hz		
Lamp Flux:8512.58x1 lm		
Name: NS40-φ735MM-70W	Type: LED	
MFR.: Lumega Group	DIM.: D735*H100mm	
	SUR.: D715mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.312	.177	.056	.304	.173	.055	.289	.166	.053	.276	.159	.051	.264	.153	.049	
2.0	.292	.160	.049	.285	.157	.048	.273	.152	.047	.261	.146	.046	.250	.141	.045	
3.0	.270	.144	.043	.264	.141	.043	.253	.137	.042	.242	.133	.041	.232	.129	.040	
4.0	.249	.129	.038	.244	.127	.038	.233	.124	.037	.224	.120	.036	.215	.117	.036	
5.0	.230	.117	.034	.225	.116	.034	.216	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.213	.107	.031	.209	.106	.030	.201	.103	.030	.193	.100	.030	.186	.098	.029	
7.0	.198	.098	.028	.195	.097	.028	.187	.095	.027	.180	.093	.027	.174	.090	.027	
8.0	.185	.091	.025	.182	.090	.025	.175	.088	.025	.169	.086	.025	.163	.084	.024	
9.0	.174	.084	.023	.170	.083	.023	.165	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.206	.206	.206	.176	.176	.176	.120	.120	.120	.069	.069	.069	.022	.022	.022	
1.0	.197	.172	.150	.168	.148	.129	.115	.102	.089	.066	.059	.052	.021	.019	.017	
2.0	.189	.148	.114	.161	.128	.099	.111	.088	.069	.064	.051	.040	.020	.017	.013	
3.0	.181	.131	.091	.155	.113	.079	.106	.078	.055	.061	.046	.032	.020	.015	.011	
4.0	.173	.117	.075	.149	.101	.065	.102	.071	.046	.059	.041	.027	.019	.013	.009	
5.0	.166	.107	.064	.142	.093	.055	.098	.065	.039	.057	.038	.023	.018	.012	.008	
6.0	.159	.099	.056	.136	.085	.048	.094	.060	.034	.055	.035	.020	.018	.012	.007	
7.0	.152	.092	.050	.131	.080	.043	.090	.056	.031	.052	.033	.018	.017	.011	.006	
8.0	.145	.086	.045	.125	.075	.040	.087	.052	.028	.050	.031	.017	.016	.010	.006	
9.0	.139	.081	.042	.120	.070	.036	.083	.049	.026	.048	.029	.015	.016	.010	.005	
10.0	.134	.077	.039	.115	.067	.034	.080	.047	.024	.047	.028	.014	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.3270A P:69.600W PF:0.9680 Freq:50.00Hz		
Lamp Flux:8512.58x1 lm		
Name: NS40-φ735MM-70W	Type: LED	
MFR.: Lumega Group	DIM.: D735*H100mm	
	SUR.: D715mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.2	20.7	19.5	21.0	21.2	19.5	21.0	19.8	21.3	21.5
3H	20.7	22.1	21.0	22.3	22.6	21.1	22.5	21.5	22.8	23.1
4H	21.2	22.6	21.6	22.8	23.1	21.8	23.1	22.2	23.4	23.7
6H	21.6	22.9	22.0	23.2	23.5	22.3	23.6	22.7	23.9	24.2
8H	21.7	22.9	22.1	23.2	23.6	22.5	23.7	22.9	24.0	24.3
12H	21.8	22.9	22.2	23.3	23.6	22.6	23.8	23.0	24.1	24.5
4H 2H	19.9	21.2	20.2	21.5	21.8	20.1	21.4	20.5	21.7	22.0
3H	21.5	22.7	21.9	23.0	23.4	21.9	23.1	22.3	23.4	23.7
4H	22.2	23.3	22.6	23.6	24.0	22.7	23.8	23.1	24.1	24.5
6H	22.7	23.6	23.2	24.0	24.5	23.4	24.3	23.8	24.7	25.1
8H	22.9	23.7	23.3	24.1	24.6	23.6	24.5	24.0	24.9	25.3
12H	23.0	23.8	23.4	24.2	24.6	23.8	24.6	24.2	25.0	25.4
8H 4H	22.5	23.4	23.0	23.8	24.2	23.0	23.8	23.4	24.2	24.7
6H	23.2	23.9	23.7	24.3	24.8	23.8	24.5	24.2	24.9	25.4
8H	23.4	24.1	23.9	24.5	25.0	24.1	24.7	24.6	25.2	25.7
12H	23.6	24.1	24.1	24.6	25.2	24.4	24.9	24.9	25.4	25.9
12H 4H	22.6	23.3	23.0	23.8	24.2	23.0	23.8	23.4	24.2	24.6
6H	23.3	23.9	23.8	24.4	24.9	23.8	24.5	24.3	24.9	25.4
8H	23.5	24.1	24.1	24.6	25.1	24.2	24.7	24.7	25.2	25.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.1 / - 0.3				

CIE Pub.117, 8513 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 7.4)
 Area: 0.4 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.3270A P:69.600W PF:0.9680 Freq:50.00Hz Lamp Flux:8512.58x1 lm		
Name: NS40-φ735MM-70W	Type: LED	
MFR.: Lumega Group	DIM.: D735*H100mm	
	SUR.: D715mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	71	65	56	48
1.25	82	72	64	81	71	64	78	69	63	55
1.50	87	77	70	85	76	70	82	74	68	61
2.00	94	85	79	92	84	78	88	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	89	99	93	88	95	90	85	76
4.00	106	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.3270A P:69.600W PF:0.9680 Freq:50.00Hz		
Lamp Flux:8512.58x1 lm		
Name: NS40-φ735MM-70W	Type: LED	
MFR.: Lumega Group	DIM.: D735*H100mm	
	SUR.: D715mm	

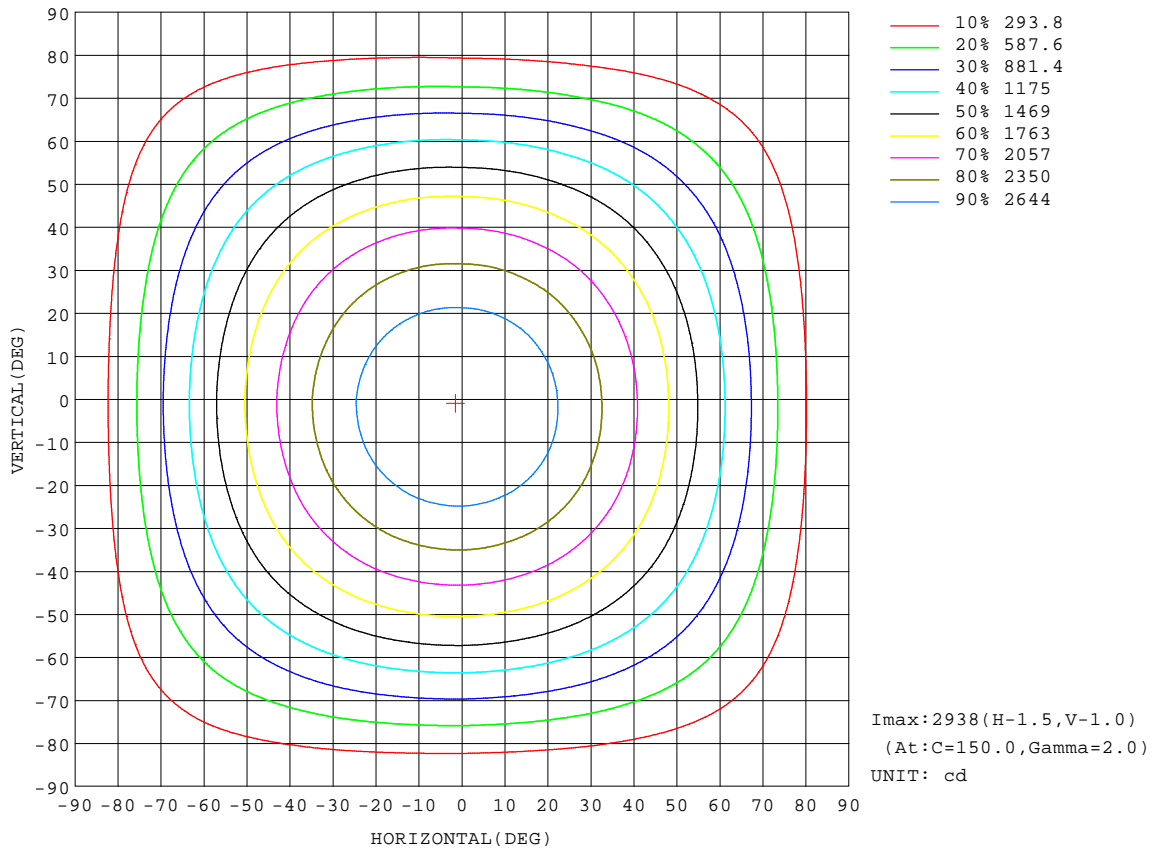


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.3270A P:69.600W PF:0.9680 Freq:50.00Hz		
Lamp Flux:8512.58x1 lm		
Name: NS40-φ735MM-70W	Type: LED	
MFR.: Lumega Group	DIM.: D735*H100mm	
	SUR.: D715mm	

Flux out:6028 lm

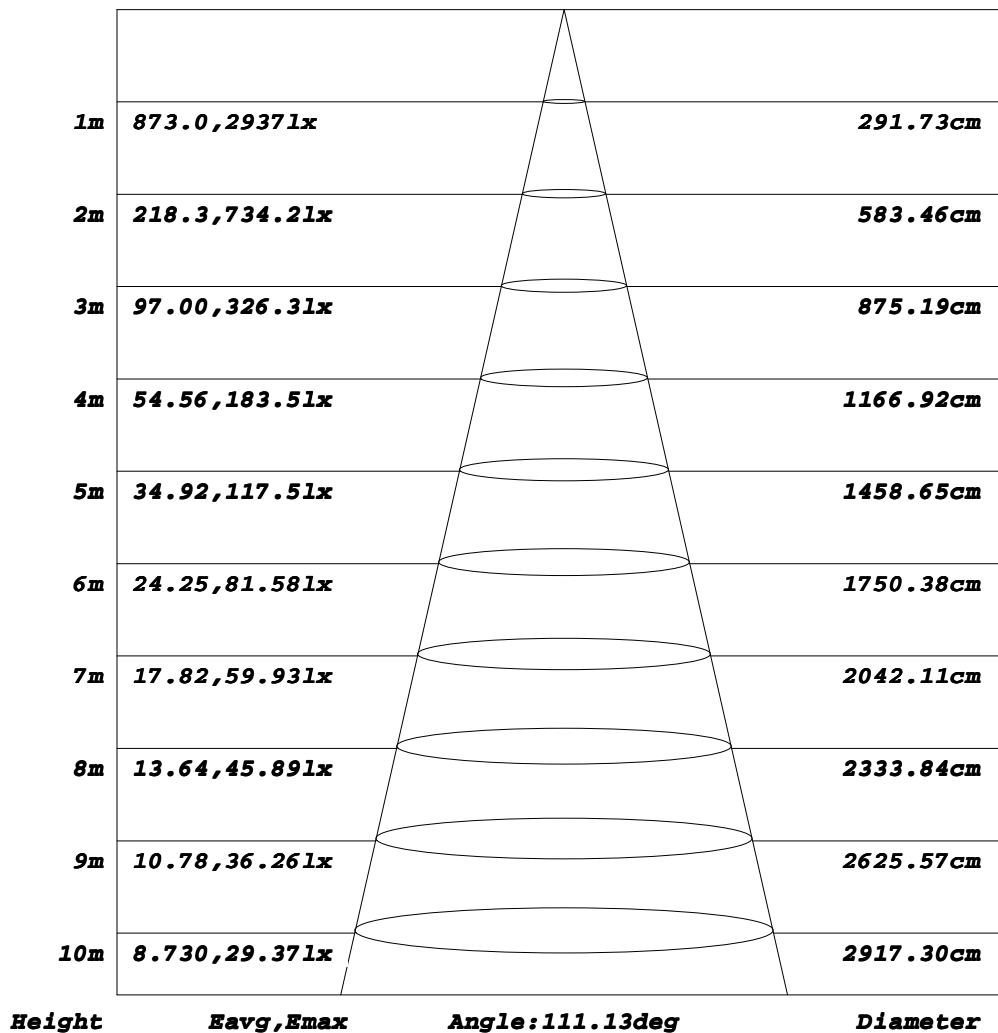


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.3270A P:69.600W PF:0.9680 Freq:50.00Hz		
Lamp Flux:8512.58x1 lm		
Name: NS40-φ735MM-70W	Type: LED	
MFR.: Lumega Group	DIM.: D735*H100mm	
	SUR.: D715mm	

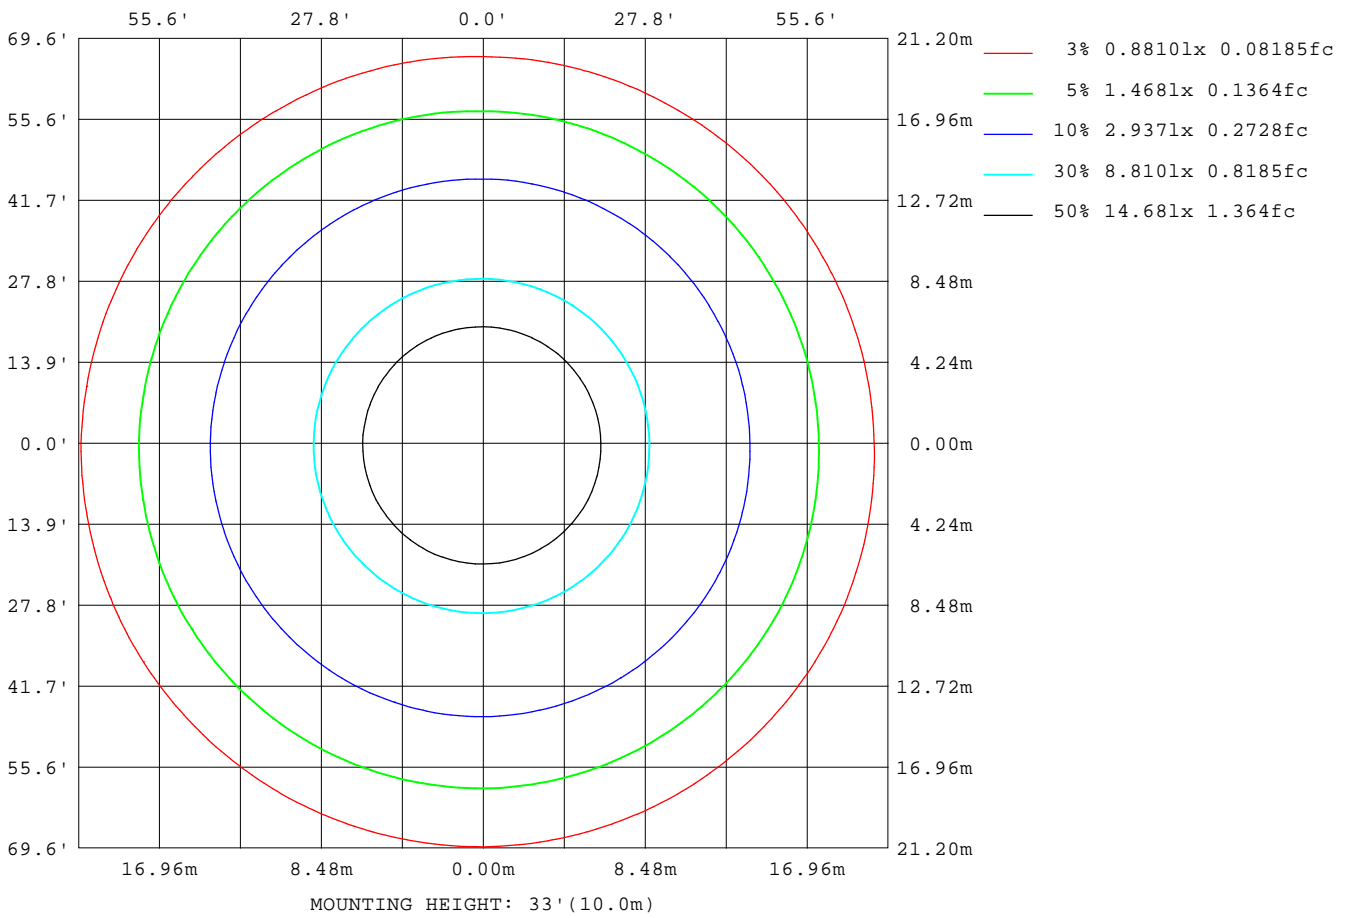

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

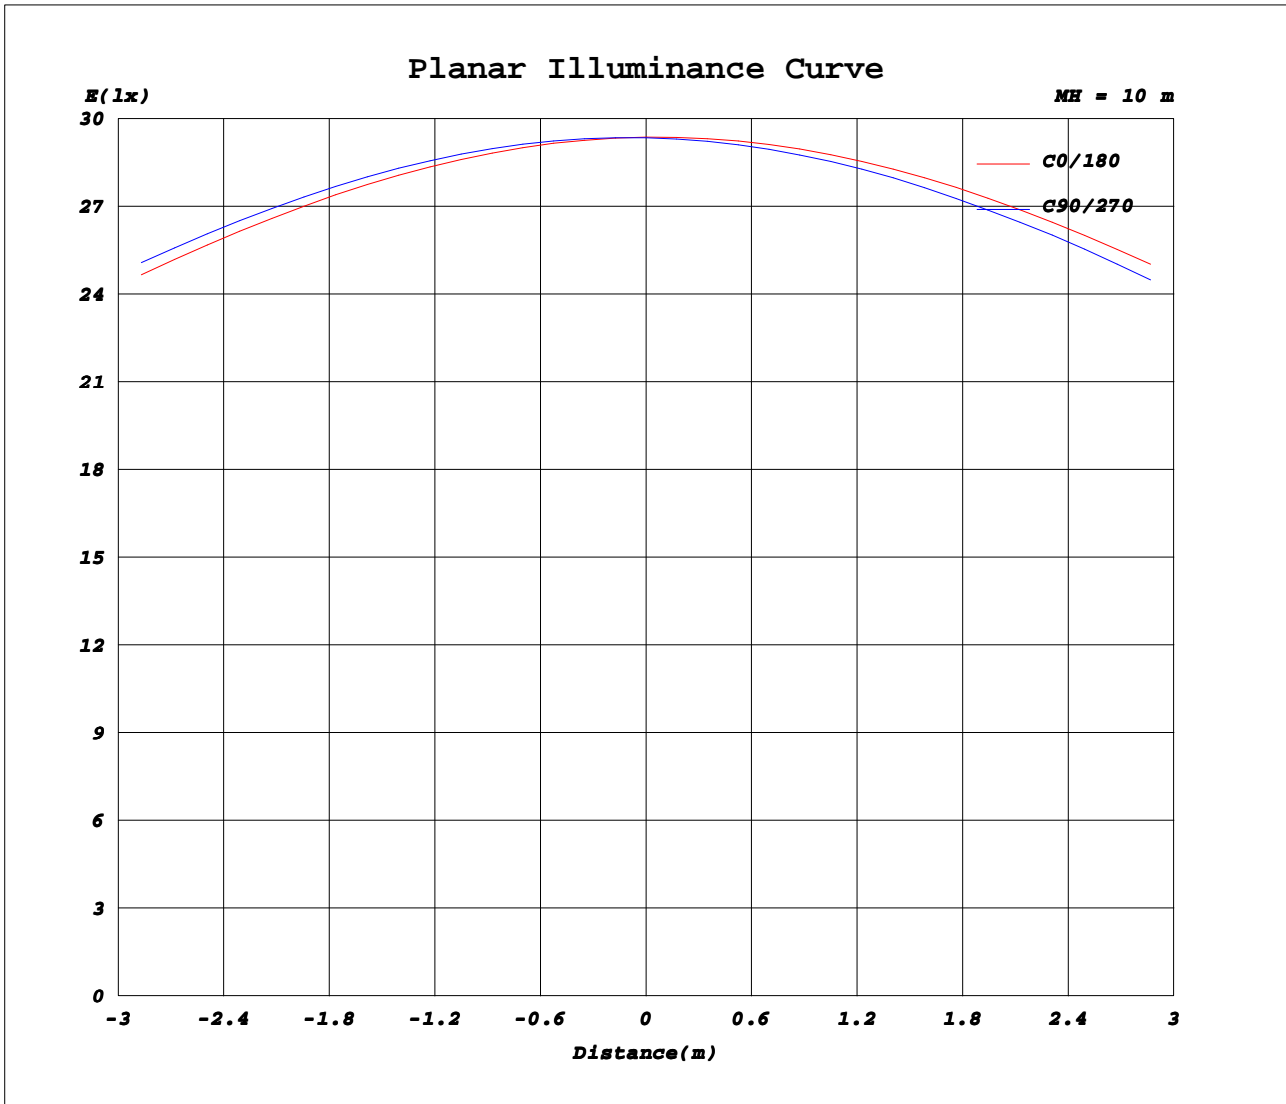

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.3270A P:69.600W PF:0.9680 Freq:50.00Hz Lamp Flux:8512.58x1 lm		
Name: NS40-φ735MM-70W	Type: LED	
MFR.: Lumega Group	DIM.: D735*H100mm	
	SUR.: D715mm	

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	2937	2936	2935	2935	2935	2936	2937	2936	2935	2935	2935	2936							
5	2916	2923	2928	2931	2933	2932	2930	2923	2915	2909	2908	2911							
10	2869	2883	2893	2899	2901	2900	2895	2881	2867	2855	2854	2858							
15	2795	2815	2829	2839	2842	2840	2833	2814	2793	2777	2774	2780							
20	2696	2722	2740	2752	2757	2755	2745	2720	2694	2673	2670	2678							
25	2574	2604	2627	2641	2647	2645	2634	2604	2572	2546	2542	2552							
30	2430	2465	2490	2507	2514	2512	2500	2466	2429	2398	2394	2404							
35	2266	2305	2334	2352	2361	2358	2344	2305	2264	2230	2225	2237							
40	2086	2128	2159	2179	2189	2187	2172	2129	2084	2046	2041	2054							
45	1888	1933	1967	1989	2001	2000	1985	1939	1889	1848	1841	1855							
50	1683	1728	1762	1785	1798	1799	1785	1736	1683	1638	1632	1647							
55	1461	1510	1546	1570	1581	1580	1563	1514	1461	1417	1411	1426							
60	1231	1281	1319	1343	1355	1352	1335	1285	1231	1187	1180	1195							
65	993	1047	1086	1111	1121	1117	1098	1048	995	952	945	958							
70	751	804	843	868	879	874	856	807	755	712	705	718							
75	515	568	607	631	641	636	617	569	519	477	470	482							
80	298	340	372	392	403	403	390	348	303	265	258	270							
85	122	154	178	194	204	204	195	163	127	97.0	91.6	100.0							
90	14.5	30.4	42.1	49.7	52.5	51.6	47.4	38.6	28.7	19.5	15.3	13.6							
95	16.6	15.3	14.8	15.1	16.6	18.5	20.3	21.3	21.7	21.5	20.5	18.9							
100	18.8	17.6	17.1	17.3	18.8	20.6	22.3	23.3	23.7	23.5	22.6	21.0							
105	21.0	19.7	19.2	19.4	20.8	22.6	24.3	25.2	25.6	25.4	24.6	23.1							
110	22.9	21.8	21.3	21.5	22.9	24.5	26.1	26.9	27.3	27.2	26.3	24.9							
115	24.6	23.5	23.1	23.3	24.6	26.2	27.7	28.6	28.9	28.8	28.0	26.5							
120	26.2	25.2	24.7	24.9	26.2	27.8	29.3	30.1	30.5	30.3	29.5	28.2							
125	27.8	26.8	26.4	26.6	27.8	29.3	30.8	31.6	31.9	31.8	31.0	29.7							
130	29.5	28.5	28.1	28.3	29.4	30.8	32.2	33.0	33.3	33.2	32.5	31.2							
135	31.0	30.1	29.7	29.9	31.0	32.3	33.6	34.3	34.7	34.6	33.9	32.7							
140	32.7	31.8	31.4	31.6	32.6	33.8	35.1	35.7	36.0	35.9	35.3	34.2							
145	34.4	33.5	33.2	33.3	34.2	35.4	36.5	37.1	37.3	37.3	36.7	35.7							
150	36.3	35.5	35.1	35.2	36.0	37.0	37.9	38.5	38.7	38.7	38.2	37.4							
155	38.1	37.5	37.2	37.2	37.9	38.7	39.5	39.9	40.1	40.1	39.7	39.1							
160	39.8	39.2	38.9	39.0	39.5	40.2	40.9	41.2	41.3	41.3	41.0	40.5							
165	41.2	40.7	40.5	40.6	40.9	41.4	41.9	42.2	42.3	42.3	42.1	41.7							
170	42.3	42.0	41.9	41.9	42.1	42.4	42.7	42.9	42.9	42.9	42.8	42.6							
175	42.9	42.7	42.7	42.7	42.8	43.0	43.2	43.2	43.2	43.2	43.1	43.0							
180	43.1	43.1	43.1	43.1	43.1	43.2	43.2	43.1	43.1	43.1	43.1	43.1							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: