
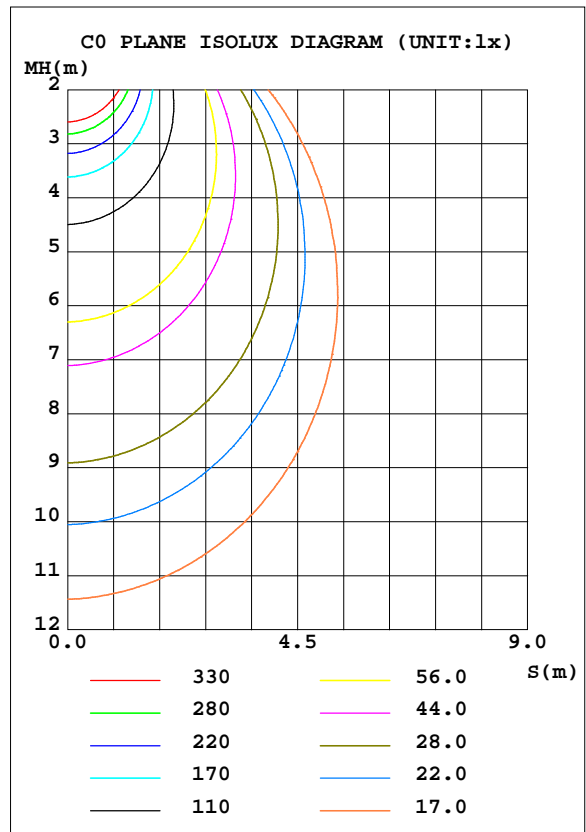


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.2700A P:57.500W PF:0.9590 Freq:50.00Hz		
Lamp Flux:6210.58x1 lm		
Name: NS41-φ1500MM-56W	Type: LED	
MFR.: Lumega Group	DIM.: D1500*70mm	
	SUR.: D1500mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.01 lm/W			
MODEL		I _{max} (cd)	2230	S/MH(C0/180)	1.19
NOMINAL POWER(W)	56	LOR(%)	100.0	S/MH(C90/270)	1.19
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	6210.6	η UP, DN(C0-180)	1.1,46.5
NOMINAL FLUX(lm)	6210.58	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.2,51.1
LAMPS INSIDE	1	η up(%)	2.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.7	CIBSE SHR MAX	1.35

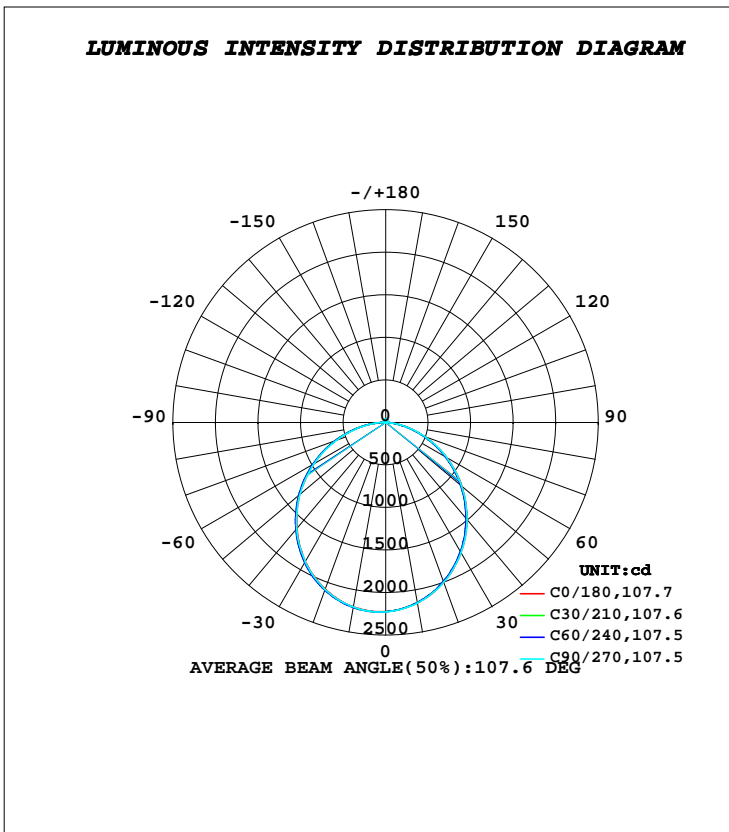

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2154	2149	2155	2177	2200	2206	2202	2183	0- 10	210.2	210.2	3.38,3.38
20	1998	1988	1998	2041	2084	2096	2089	2054	10- 20	598.4	808.6	13,13
30	1770	1757	1771	1829	1889	1904	1893	1845	20- 30	896.7	1705	27.5,27.5
40	1488	1473	1488	1557	1626	1643	1629	1575	30- 40	1065	2770	44.6,44.6
50	1170	1151	1167	1244	1321	1336	1318	1260	40- 50	1085	3855	62.1,62.1
60	830.9	813.4	829.3	903.7	977.9	992.2	974.1	918.0	50- 60	963.3	4818	77.6,77.6
70	488.7	476.0	492.2	559.5	625.7	637.1	619.2	567.7	60- 70	724.5	5543	89.2,89.2
80	170.6	166.1	182.6	237.1	288.7	292.9	273.9	232.1	70- 80	413.0	5956	95.9,95.9
90	11.48	10.67	12.03	17.33	22.37	22.61	20.67	16.91	80- 90	110.2	6066	97.7,97.7
100	13.59	13.51	13.84	14.87	15.88	16.16	15.94	15.03	90-100	15.48	6082	97.9,97.9
110	16.29	16.91	17.44	17.87	18.16	18.27	18.11	17.39	100-110	17.11	6099	98.2,98.2
120	19.33	20.39	21.07	21.17	21.10	21.31	21.30	20.56	110-120	18.98	6118	98.5,98.5
130	23.19	24.41	25.15	25.15	24.94	25.09	25.05	24.34	120-130	20.32	6138	98.8,98.8
140	27.68	28.89	29.59	29.48	29.17	29.28	29.26	28.66	130-140	20.70	6159	99.2,99.2
150	33.08	33.83	34.28	34.28	34.13	34.10	34.00	33.63	140-150	19.70	6178	99.5,99.5
160	38.24	38.48	38.65	38.75	38.76	38.58	38.36	38.27	150-160	16.74	6195	99.8,99.8
170	42.05	41.95	41.95	42.12	42.23	41.88	41.56	41.67	160-170	11.39	6207	99.9,99.9
180	43.41	43.03	42.88	43.14	43.41	43.20	42.98	43.10	170-180	4.059	6211	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.2700A P:57.500W PF:0.9590 Freq:50.00Hz		
Lamp Flux:6210.58x1 lm		
Name: NS41-φ1500MM-56W	Type: LED	
MFR.: Lumega Group	DIM.: D1500*70mm	
	SUR.: D1500mm	

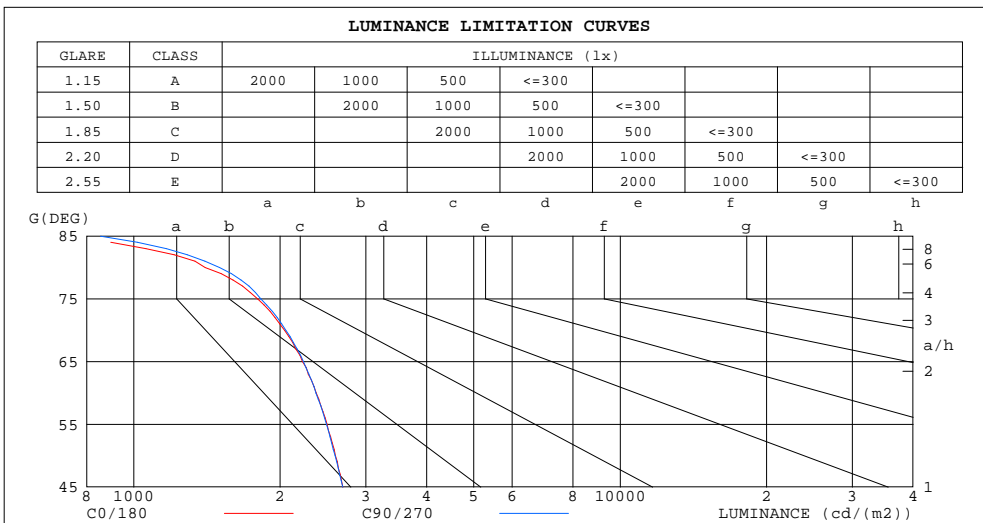

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	680	855
80	1403	1502
75	1797	1827
70	2041	2056
65	2224	2233
60	2374	2370
55	2499	2489
50	2600	2593
45	2690	2689


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.2700A P:57.500W PF:0.9590 Freq:50.00Hz		
Lamp Flux:6210.58x1 lm		
Name: NS41-φ1500MM-56W	Type: LED	
MFR.: Lumega Group	DIM.: D1500*70mm	
	SUR.: D1500mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.04	.99	.95	1.01	.97	.94	.96	.93	.90	.92	.90	.87	.88	.86	.84	.82
2.0	.90	.84	.78	.88	.82	.77	.84	.79	.75	.81	.76	.73	.77	.74	.71	.68
3.0	.79	.71	.65	.78	.70	.64	.74	.68	.63	.71	.66	.61	.68	.64	.60	.58
4.0	.70	.62	.55	.69	.61	.54	.66	.59	.53	.63	.57	.52	.61	.56	.52	.49
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.55	.49	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.43	.37	.50	.42	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.33
8.0	.47	.38	.33	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.30
9.0	.43	.35	.29	.42	.35	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

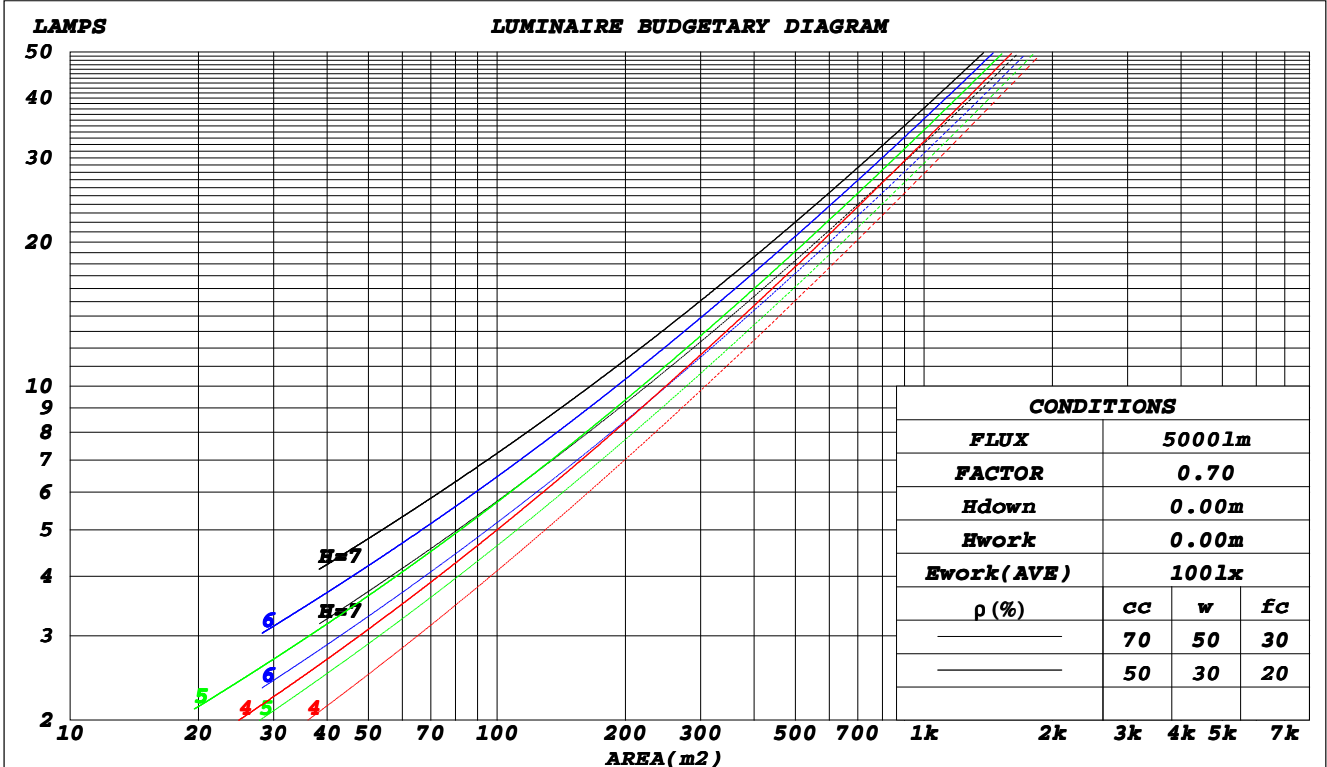

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.2700A P:57.500W PF:0.9590 Freq:50.00Hz		
Lamp Flux:6210.58x1 lm		
Name: NS41-φ1500MM-56W	Type: LED	
MFR.: Lumega Group	DIM.: D1500*70mm	
	SUR.: D1500mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.305	.174	.055	.297	.170	.054	.283	.162	.052	.269	.155	.050	.257	.149	.048	
2.0	.287	.158	.048	.281	.155	.048	.268	.149	.046	.256	.143	.045	.245	.138	.044	
3.0	.266	.142	.042	.260	.139	.042	.249	.135	.041	.238	.130	.040	.228	.126	.039	
4.0	.246	.128	.038	.241	.126	.037	.230	.122	.036	.221	.119	.036	.212	.115	.035	
5.0	.228	.116	.034	.223	.114	.033	.214	.111	.033	.205	.108	.032	.197	.105	.032	
6.0	.211	.106	.030	.207	.104	.030	.199	.102	.030	.191	.099	.029	.184	.097	.029	
7.0	.197	.097	.028	.193	.096	.027	.185	.094	.027	.179	.092	.027	.172	.089	.026	
8.0	.184	.090	.025	.180	.089	.025	.174	.087	.025	.168	.085	.024	.162	.083	.024	
9.0	.172	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.152	.077	.022	
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.149	.074	.021	.144	.072	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.178	.178	.178	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.198	.174	.153	.169	.149	.131	.116	.103	.091	.067	.059	.053	.021	.019	.017	
2.0	.190	.150	.117	.162	.129	.101	.111	.089	.070	.064	.052	.041	.021	.017	.013	
3.0	.182	.132	.093	.156	.114	.081	.107	.079	.057	.062	.046	.033	.020	.015	.011	
4.0	.174	.119	.077	.149	.103	.067	.103	.072	.047	.059	.042	.028	.019	.014	.009	
5.0	.167	.109	.066	.143	.094	.057	.099	.066	.040	.057	.039	.024	.018	.013	.008	
6.0	.160	.100	.058	.137	.087	.050	.095	.061	.036	.055	.036	.021	.018	.012	.007	
7.0	.153	.093	.052	.132	.081	.045	.091	.057	.032	.053	.033	.019	.017	.011	.006	
8.0	.147	.088	.047	.126	.076	.041	.087	.053	.029	.051	.032	.017	.016	.010	.006	
9.0	.141	.083	.044	.121	.072	.038	.084	.051	.027	.049	.030	.016	.016	.010	.005	
10.0	.135	.079	.041	.116	.068	.036	.081	.048	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.2700A P:57.500W PF:0.9590 Freq:50.00Hz		
Lamp Flux:6210.58x1 lm		
Name: NS41-φ1500MM-56W	Type: LED	
MFR.: Lumega Group	DIM.: D1500*70mm	
	SUR.: D1500mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.5	17.0	15.8	17.2	17.5	15.5	17.0	15.8	17.2	17.5
3H	16.9	18.2	17.2	18.5	18.8	16.9	18.2	17.2	18.5	18.8
4H	17.4	18.7	17.7	18.9	19.3	17.4	18.7	17.7	19.0	19.3
6H	17.7	18.9	18.0	19.2	19.5	17.7	18.9	18.1	19.2	19.6
8H	17.7	18.9	18.1	19.2	19.5	17.8	18.9	18.1	19.3	19.6
12H	17.7	18.8	18.1	19.2	19.5	17.8	18.9	18.1	19.2	19.6
4H 2H	16.1	17.3	16.4	17.6	17.9	16.0	17.3	16.4	17.6	17.9
3H	17.6	18.7	18.0	19.0	19.4	17.6	18.7	18.0	19.0	19.4
4H	18.2	19.2	18.6	19.6	19.9	18.2	19.2	18.6	19.6	20.0
6H	18.6	19.5	19.0	19.9	20.3	18.6	19.5	19.0	19.9	20.3
8H	18.6	19.5	19.1	19.9	20.3	18.7	19.6	19.2	20.0	20.4
12H	18.7	19.4	19.1	19.9	20.3	18.7	19.5	19.2	19.9	20.4
8H 4H	18.4	19.2	18.8	19.6	20.0	18.4	19.2	18.8	19.6	20.1
6H	18.8	19.6	19.3	20.0	20.5	18.9	19.6	19.4	20.0	20.5
8H	19.0	19.6	19.5	20.1	20.6	19.0	19.7	19.5	20.1	20.6
12H	19.0	19.6	19.5	20.0	20.6	19.1	19.6	19.6	20.1	20.7
12H 4H	18.3	19.1	18.8	19.6	20.0	18.4	19.1	18.8	19.6	20.0
6H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0	20.5
8H	19.0	19.6	19.5	20.0	20.6	19.1	19.6	19.6	20.1	20.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3				

CIE Pub.117, 6211 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 6.3$)
 Area: 0.7 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.2700A P:57.500W PF:0.9590 Freq:50.00Hz Lamp Flux:6210.58x1 lm		
Name: NS41-φ1500MM-56W	Type: LED	
MFR.: Lumega Group	DIM.: D1500*70mm	
	SUR.: D1500mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	57	46	39	55	45	39	32
0.80	67	56	49	66	55	48	64	55	48	41
1.00	76	65	57	74	64	57	72	65	56	49
1.25	83	72	65	81	72	65	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	80	93	85	79	89	82	77	69
2.50	98	91	85	96	89	84	92	86	82	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	94	91	81
5.00	108	103	99	106	101	98	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.2700A P:57.500W PF:0.9590 Freq:50.00Hz		
Lamp Flux:6210.58x1 lm		
Name: NS41-φ1500MM-56W	Type: LED	
MFR.: Lumega Group	DIM.: D1500*70mm	
	SUR.: D1500mm	

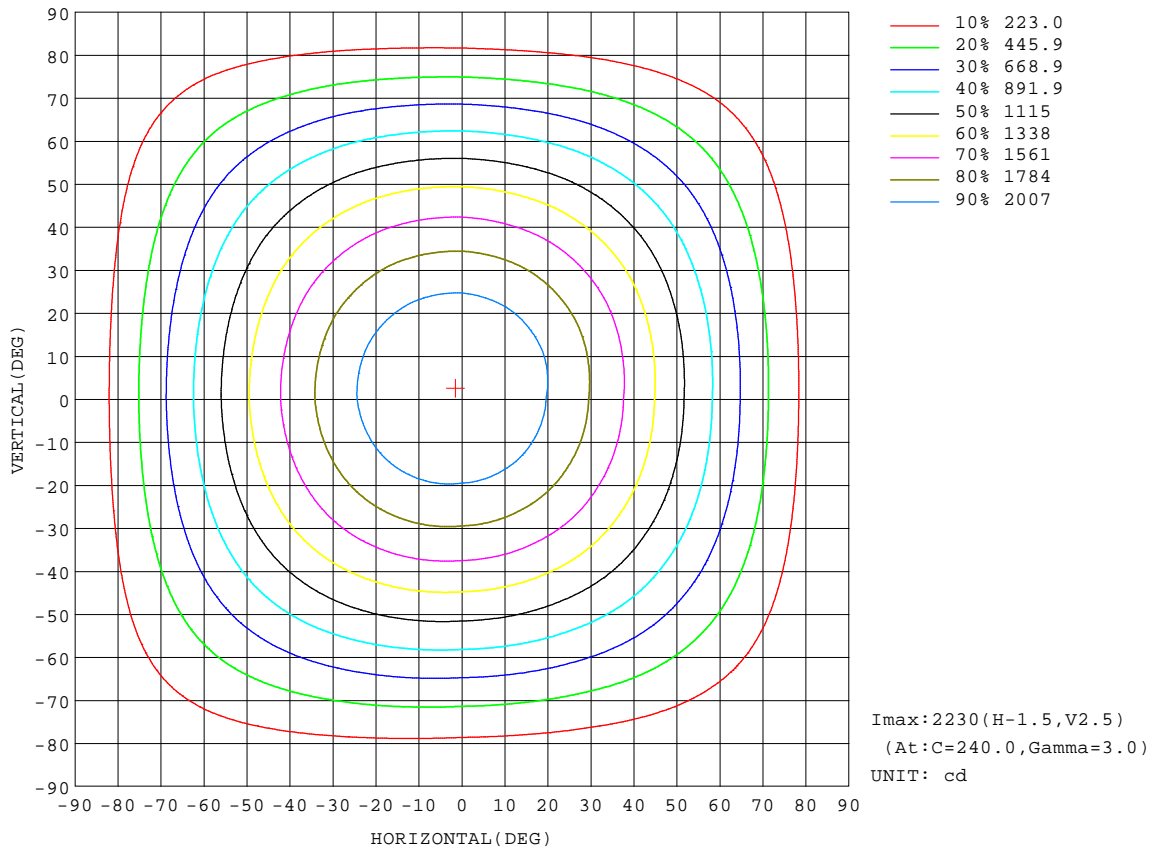


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.2700A P:57.500W PF:0.9590 Freq:50.00Hz		
Lamp Flux:6210.58x1 lm		
Name: NS41-φ1500MM-56W	Type: LED	
MFR.: Lumega Group	DIM.: D1500*70mm	
	SUR.: D1500mm	

Flux out:4263 lm

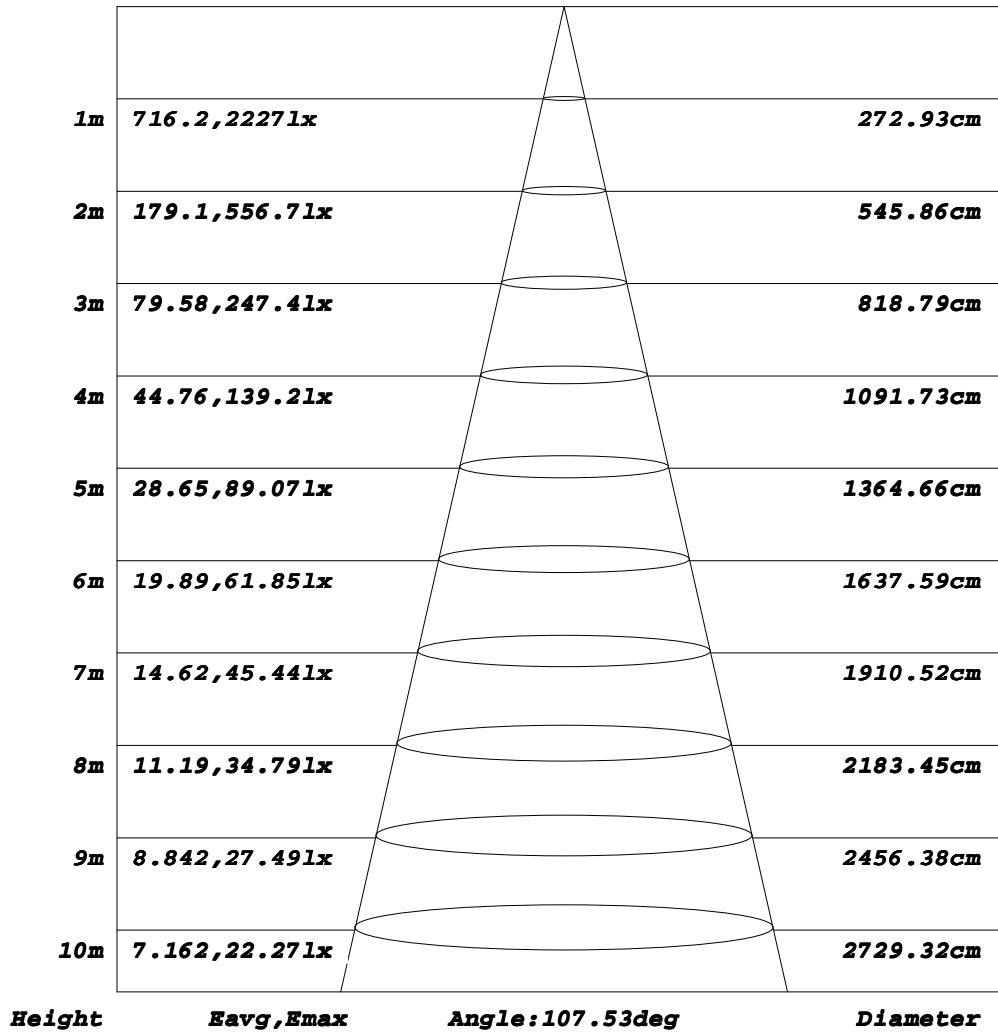


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.2700A P:57.500W PF:0.9590 Freq:50.00Hz		
Lamp Flux:6210.58x1 lm		
Name: NS41-φ1500MM-56W	Type: LED	
MFR.: Lumega Group	DIM.: D1500*70mm	
	SUR.: D1500mm	

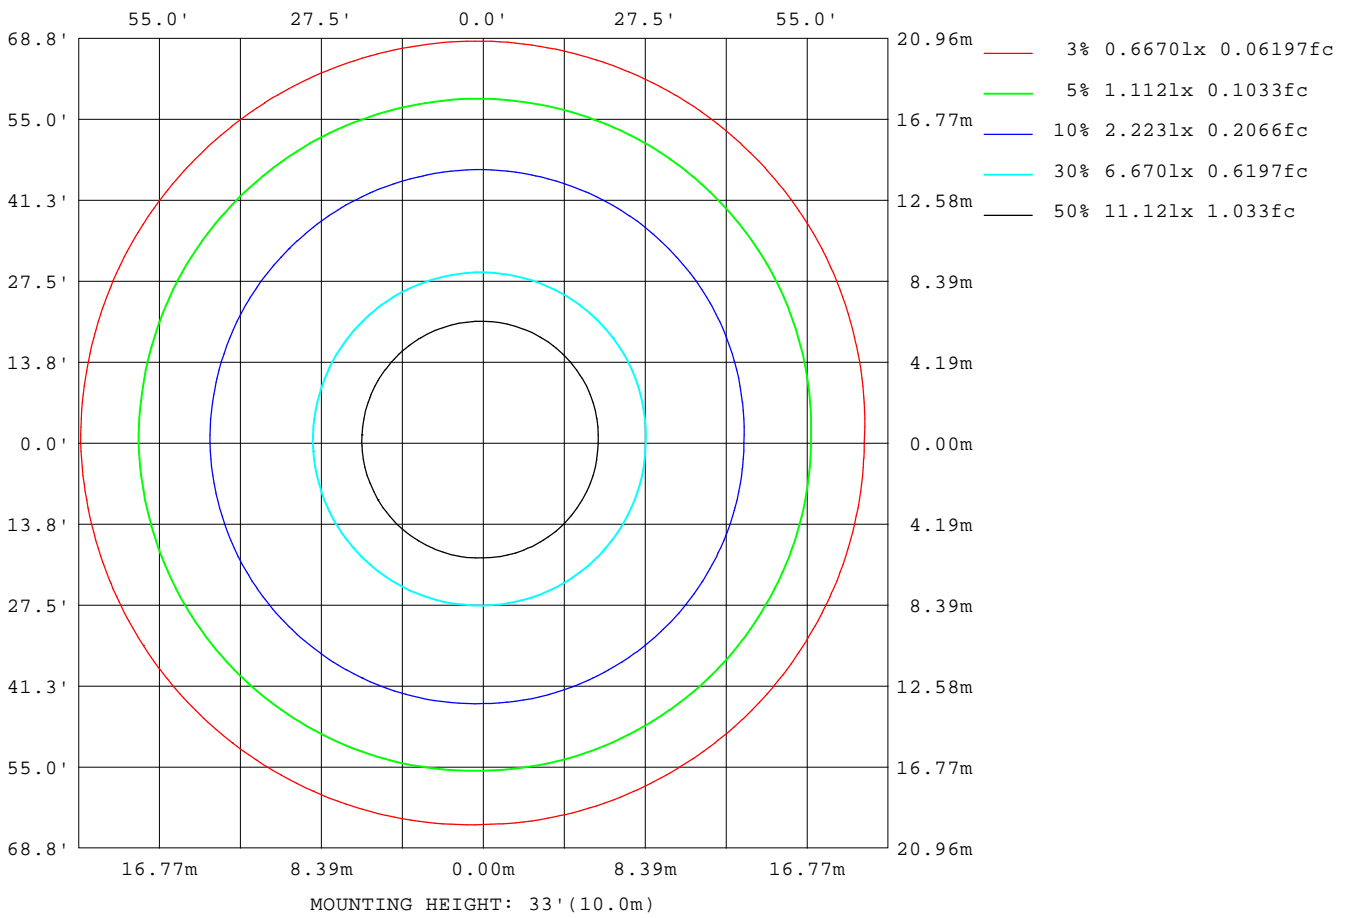

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

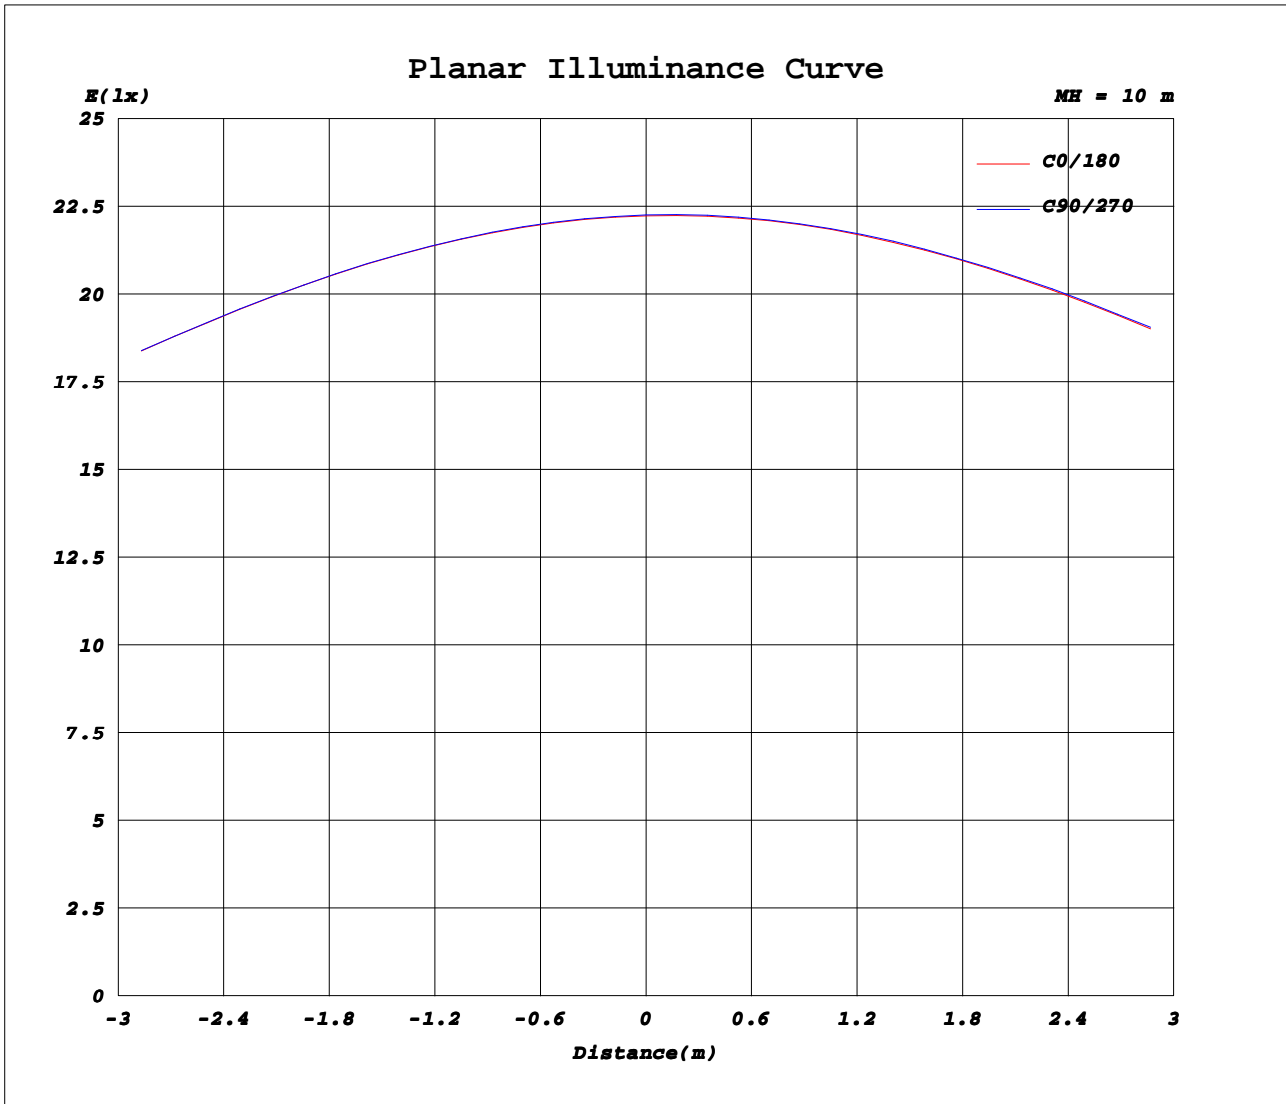

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.2700A P:57.500W PF:0.9590 Freq:50.00Hz		
Lamp Flux:6210.58x1 lm		
Name: NS41-φ1500MM-56W	Type: LED	
MFR.: Lumega Group	DIM.: D1500*70mm	
	SUR.: D1500mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	2223	2225	2225	2226	2225	2224	2223	2224	2225	2226	2225	2225							
5	2200	2198	2198	2201	2208	2216	2224	2227	2228	2226	2220	2212							
10	2154	2149	2149	2155	2169	2185	2200	2206	2207	2202	2192	2175							
15	2086	2079	2078	2086	2107	2131	2153	2162	2163	2157	2141	2118							
20	1998	1988	1988	1998	2025	2056	2084	2095	2097	2089	2069	2039							
25	1892	1880	1880	1892	1925	1962	1995	2009	2011	2001	1977	1941							
30	1770	1757	1757	1771	1808	1851	1889	1903	1905	1893	1866	1825							
35	1634	1621	1621	1636	1677	1722	1763	1779	1781	1768	1738	1694							
40	1488	1473	1473	1488	1532	1581	1626	1642	1643	1629	1598	1551							
45	1332	1315	1315	1331	1377	1429	1475	1492	1493	1478	1446	1397							
50	1170	1151	1150	1167	1216	1271	1321	1336	1335	1318	1285	1235							
55	1003	985	983	999	1048	1102	1151	1167	1166	1149	1116	1068							
60	831	814	813	829	877	930	978	993	991	974	942	894							
65	658	643	644	660	706	757	802	817	815	798	767	720							
70	489	475	477	492	536	583	626	638	636	619	589	546							
75	326	315	316	331	370	414	451	462	458	442	415	376							
80	171	164	168	183	218	256	289	296	290	274	249	215							
85	41.5	36.7	40.2	52.1	81.2	112	138	142	137	122	103	75.6							
90	11.5	10.6	10.8	12.0	15.5	19.2	22.4	22.9	22.3	20.7	18.4	15.4							
95	12.4	12.2	12.3	12.6	13.4	14.3	15.1	15.5	15.5	15.3	14.7	13.7							
100	13.6	13.5	13.6	13.8	14.5	15.2	15.9	16.1	16.2	15.9	15.4	14.6							
105	14.9	15.1	15.4	15.7	16.1	16.6	16.9	17.1	17.1	16.9	16.5	15.8							
110	16.3	16.7	17.1	17.4	17.7	18.0	18.2	18.3	18.3	18.1	17.7	17.1							
115	17.8	18.4	18.9	19.2	19.4	19.5	19.5	19.7	19.7	19.6	19.2	18.6							
120	19.3	20.1	20.7	21.1	21.2	21.2	21.1	21.3	21.4	21.3	20.9	20.2							
125	21.2	22.0	22.6	23.0	23.1	23.0	22.9	23.1	23.1	23.1	22.7	22.0							
130	23.2	24.1	24.7	25.2	25.2	25.1	24.9	25.1	25.1	25.1	24.7	24.0							
135	25.2	26.1	26.8	27.2	27.3	27.1	27.0	27.1	27.2	27.2	26.7	26.1							
140	27.7	28.6	29.2	29.6	29.6	29.4	29.2	29.3	29.3	29.3	28.9	28.4							
145	30.3	31.1	31.6	32.0	32.0	31.8	31.6	31.7	31.7	31.6	31.3	30.9							
150	33.1	33.6	34.0	34.3	34.3	34.2	34.1	34.1	34.1	34.0	33.8	33.5							
155	35.8	36.2	36.4	36.6	36.6	36.6	36.6	36.5	36.4	36.3	36.1	36.0							
160	38.2	38.4	38.5	38.7	38.7	38.8	38.8	38.6	38.5	38.4	38.3	38.3							
165	40.4	40.5	40.5	40.6	40.7	40.7	40.7	40.5	40.3	40.1	40.1	40.2							
170	42.0	42.0	41.9	41.9	42.1	42.2	42.2	42.0	41.8	41.6	41.6	41.8							
175	43.1	42.9	42.8	42.7	42.8	43.0	43.1	42.9	42.7	42.5	42.6	42.8							
180	43.4	43.1	42.9	42.9	43.0	43.2	43.4	43.3	43.1	43.0	43.0	43.2							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: