
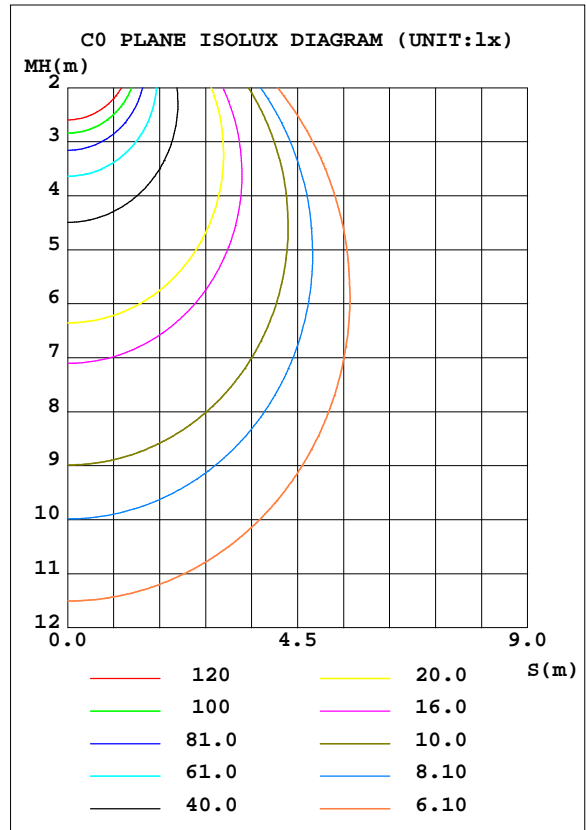


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.80V I:0.0960A P:19.800W PF:0.9260 Freq:50.00Hz		
Lamp Flux:2319.48x1 lm		
Name: NS42-φ300-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H40mm	
	SUR.: D250mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 117.15 lm/W			
MODEL		I _{max} (cd)	807.4	S/MH(C0/180)	1.24
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2319.5	η UP, DN(C0-180)	1.3,48.7
NOMINAL FLUX(lm)	2319.48	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3,48.7
LAMPS INSIDE	1	η up(%)	2.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.5	CIBSE SHR MAX	1.35

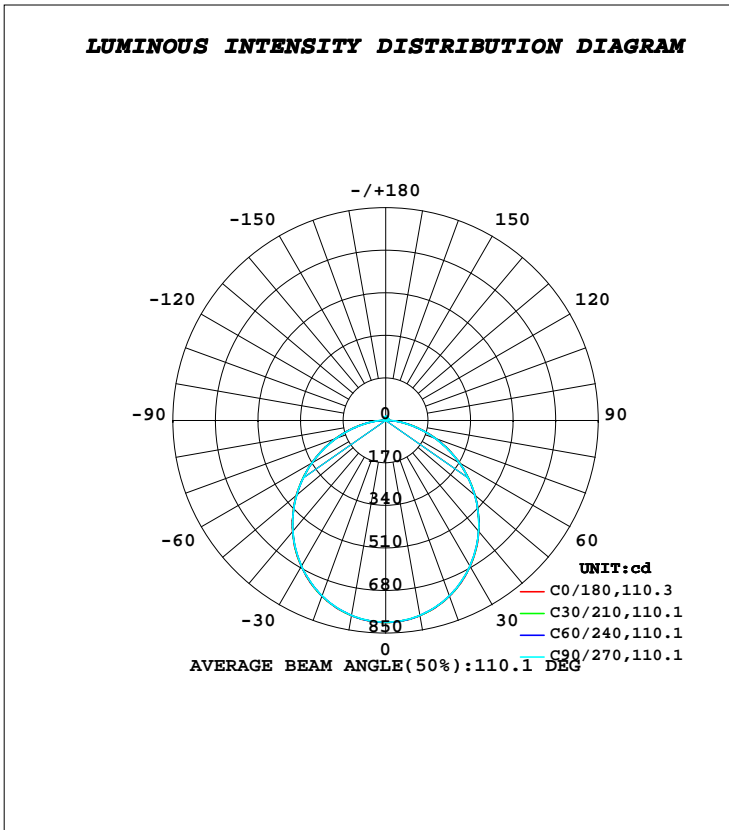

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	791.9	791.0	790.6	791.0	791.9	791.0	790.6	791.0	0- 10	76.27	76.27	3.29,3.29
20	746.8	745.7	745.3	745.7	746.8	745.7	745.3	745.7	10- 20	217.8	294.1	12.7,12.7
30	674.4	673.3	673.0	673.3	674.4	673.3	673.0	673.3	20- 30	328.4	622.5	26.8,26.8
40	579.5	578.3	577.9	578.3	579.5	578.3	577.9	578.3	30- 40	393.0	1015	43.8,43.8
50	467.3	465.5	464.8	465.5	467.3	465.5	464.8	465.5	40- 50	403.8	1419	61.2,61.2
60	342.1	340.8	340.4	340.8	342.1	340.8	340.4	340.8	50- 60	361.3	1781	76.8,76.8
70	214.0	212.0	211.1	212.0	214.0	212.0	211.1	212.0	60- 70	273.8	2054	88.6,88.6
80	94.41	91.91	90.60	91.91	94.41	91.91	90.60	91.91	70- 80	158.8	2213	95.4,95.4
90	5.411	7.507	8.855	7.507	5.411	7.507	8.855	7.507	80- 90	48.32	2261	97.5,97.5
100	5.726	5.763	5.718	5.763	5.726	5.763	5.718	5.763	90-100	5.775	2267	97.7,97.7
110	7.262	7.310	7.275	7.310	7.262	7.310	7.275	7.310	100-110	6.891	2274	98,98
120	8.840	8.907	8.888	8.907	8.840	8.907	8.888	8.907	110-120	8.019	2282	98.4,98.4
130	10.39	10.47	10.47	10.47	10.39	10.47	10.47	10.47	120-130	8.673	2291	98.8,98.8
140	11.82	11.90	11.91	11.90	11.82	11.90	11.91	11.90	130-140	8.644	2299	99.1,99.1
150	13.17	13.23	13.24	13.23	13.17	13.23	13.24	13.23	140-150	7.873	2307	99.5,99.5
160	14.51	14.50	14.48	14.50	14.51	14.50	14.48	14.50	150-160	6.399	2314	99.8,99.8
170	15.75	15.63	15.55	15.63	15.75	15.63	15.55	15.63	160-170	4.259	2318	99.9,99.9
180	16.26	16.11	16.02	16.11	16.26	16.11	16.02	16.11	170-180	1.517	2319	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.80V I:0.0960A P:19.800W PF:0.9260 Freq:50.00Hz Lamp Flux:2319.48x1 lm		
Name: NS42-φ300-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H40mm	
	SUR.: D250mm	

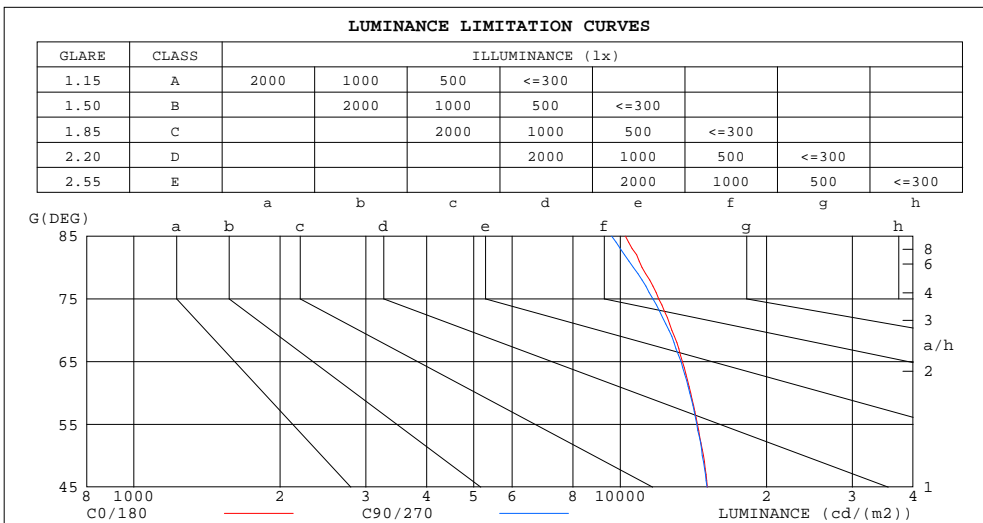

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	10248	9599
80	11096	10648
75	12003	11676
70	12769	12598
65	13428	13336
60	13963	13895
55	14421	14367
50	14838	14757
45	15121	15086


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.80V I:0.0960A P:19.800W PF:0.9260 Freq:50.00Hz		
Lamp Flux:2319.48x1 lm		
Name: NS42-φ300-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H40mm	
	SUR.: D250mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.97
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.81
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.79	.71	.64	.77	.70	.64	.74	.67	.62	.71	.65	.61	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.55	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.54	.49	.44	.42
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.39	.49	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.41	.35	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.36	.30	.26	.35	.30	.25	.24

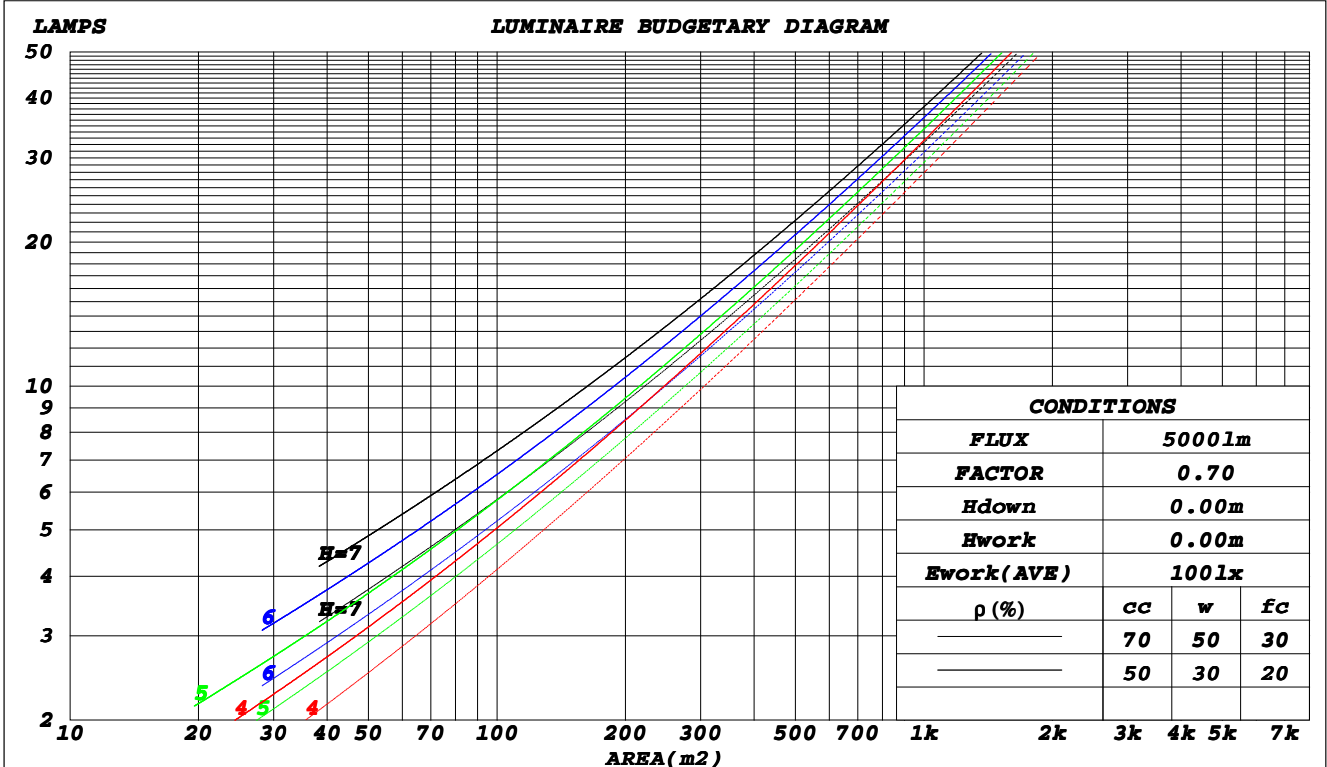

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.80V I:0.0960A P:19.800W PF:0.9260 Freq:50.00Hz		
Lamp Flux:2319.48x1 lm		
Name: NS42-φ300-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H40mm	
	SUR.: D250mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.310	.176	.056	.302	.172	.055	.288	.165	.053	.274	.158	.051	.262	.152	.049	
2.0	.291	.159	.049	.284	.156	.048	.271	.151	.047	.259	.145	.045	.248	.140	.044	
3.0	.269	.143	.043	.263	.141	.042	.251	.136	.041	.240	.132	.040	.230	.128	.039	
4.0	.248	.129	.038	.242	.127	.037	.232	.123	.037	.222	.119	.036	.214	.116	.035	
5.0	.229	.117	.034	.224	.115	.034	.215	.112	.033	.206	.109	.032	.198	.106	.032	
6.0	.212	.106	.030	.208	.105	.030	.200	.102	.030	.192	.100	.029	.185	.097	.029	
7.0	.198	.098	.028	.194	.097	.028	.186	.094	.027	.179	.092	.027	.173	.090	.026	
8.0	.185	.090	.025	.181	.089	.025	.174	.087	.025	.168	.085	.025	.162	.083	.024	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	
10.0	.163	.078	.022	.160	.077	.022	.154	.076	.021	.149	.074	.021	.144	.073	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.210	.210	.210	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.200	.175	.154	.171	.151	.132	.117	.104	.091	.067	.060	.053	.022	.019	.017	
2.0	.191	.151	.117	.164	.130	.102	.112	.090	.071	.065	.052	.042	.021	.017	.014	
3.0	.184	.134	.094	.157	.115	.081	.108	.080	.057	.062	.047	.034	.020	.015	.011	
4.0	.176	.121	.078	.151	.104	.068	.104	.073	.048	.060	.043	.028	.019	.014	.009	
5.0	.169	.110	.067	.145	.095	.058	.100	.067	.041	.058	.039	.024	.019	.013	.008	
6.0	.162	.102	.059	.139	.088	.051	.096	.062	.036	.056	.036	.022	.018	.012	.007	
7.0	.155	.095	.053	.133	.082	.046	.092	.058	.033	.053	.034	.020	.017	.011	.006	
8.0	.148	.089	.049	.128	.077	.042	.088	.054	.030	.051	.032	.018	.017	.011	.006	
9.0	.142	.084	.045	.123	.073	.039	.085	.051	.028	.049	.030	.017	.016	.010	.006	
10.0	.137	.080	.042	.118	.069	.037	.082	.049	.026	.048	.029	.016	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.80V I:0.0960A P:19.800W PF:0.9260 Freq:50.00Hz Lamp Flux:2319.48x1 lm		
Name: NS42-φ300-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H40mm	
	SUR.: D250mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.0	23.5	22.3	23.7	24.0	22.0	23.4	22.3	23.7	23.9
3H	23.5	24.8	23.8	25.1	25.4	23.4	24.8	23.8	25.1	25.4
4H	24.1	25.4	24.4	25.7	26.0	24.0	25.3	24.4	25.6	25.9
6H	24.5	25.8	24.9	26.1	26.4	24.5	25.7	24.8	26.0	26.3
8H	24.7	25.9	25.1	26.2	26.6	24.6	25.8	25.0	26.1	26.5
12H	24.8	25.9	25.2	26.3	26.6	24.7	25.8	25.1	26.2	26.5
4H 2H	22.6	23.9	22.9	24.2	24.5	22.5	23.8	22.9	24.1	24.4
3H	24.2	25.4	24.6	25.7	26.1	24.2	25.4	24.6	25.7	26.0
4H	25.0	26.0	25.4	26.4	26.8	24.9	26.0	25.3	26.3	26.7
6H	25.6	26.5	26.0	26.9	27.3	25.5	26.4	25.9	26.8	27.2
8H	25.8	26.6	26.2	27.1	27.5	25.7	26.5	26.1	27.0	27.4
12H	25.9	26.7	26.4	27.2	27.6	25.8	26.6	26.3	27.0	27.5
8H 4H	25.2	26.1	25.7	26.5	26.9	25.2	26.1	25.6	26.5	26.9
6H	26.0	26.7	26.5	27.1	27.6	25.9	26.6	26.4	27.1	27.5
8H	26.3	26.9	26.8	27.4	27.9	26.2	26.8	26.7	27.3	27.8
12H	26.5	27.1	27.0	27.6	28.1	26.4	27.0	26.9	27.4	28.0
12H 4H	25.3	26.0	25.7	26.5	26.9	25.2	26.0	25.7	26.4	26.9
6H	26.0	26.7	26.5	27.1	27.6	26.0	26.6	26.5	27.1	27.6
8H	26.4	26.9	26.9	27.4	28.0	26.3	26.8	26.8	27.3	27.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 2319 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.9)
Area: 0.049 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.80V I:0.0960A P:19.800W PF:0.9260 Freq:50.00Hz Lamp Flux:2319.48x1 lm		
Name: NS42-φ300-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H40mm	
	SUR.: D250mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	57	71	65	56	49
1.25	82	72	65	81	71	64	78	69	63	56
1.50	87	77	70	86	76	70	82	74	68	61
2.00	94	86	79	92	84	78	88	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	95	89	99	93	88	95	89	85	76
4.00	105	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.80V I:0.0960A P:19.800W PF:0.9260 Freq:50.00Hz		
Lamp Flux:2319.48x1 lm		
Name: NS42-φ300-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H40mm	
	SUR.: D250mm	

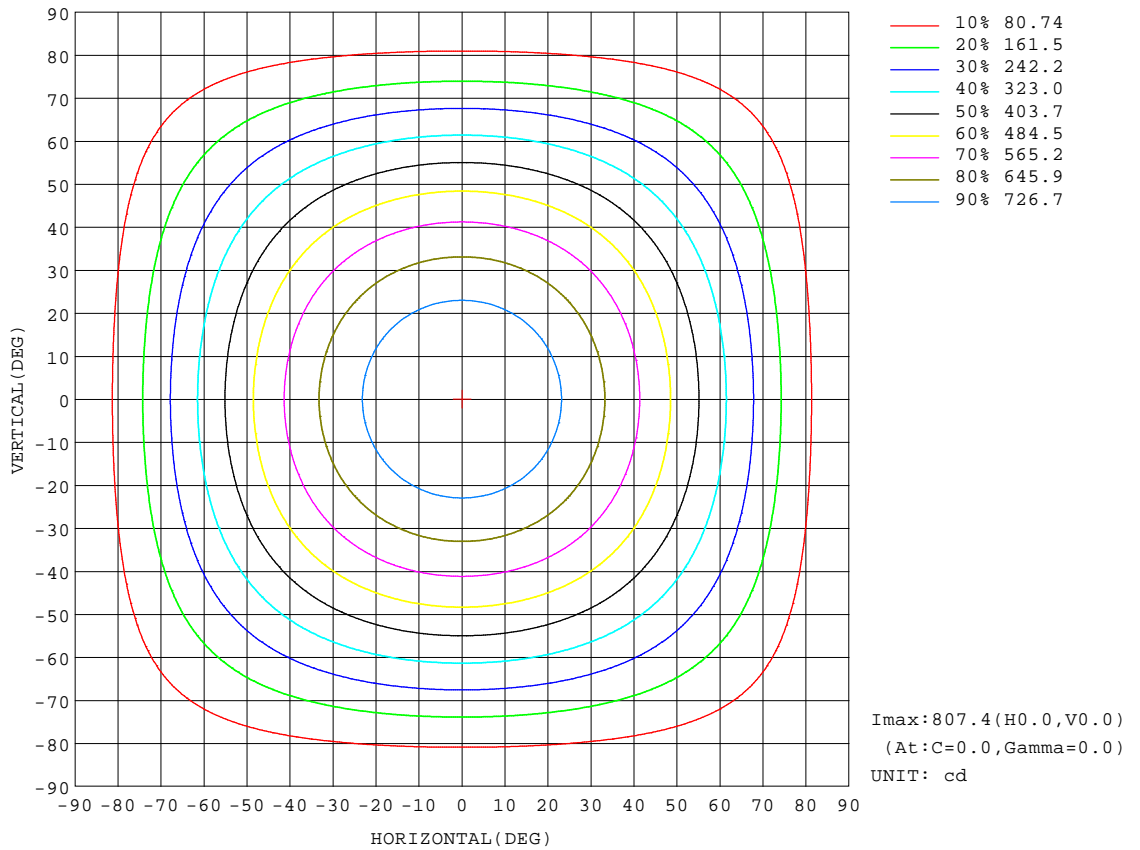


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.80V I:0.0960A P:19.800W PF:0.9260 Freq:50.00Hz		
Lamp Flux:2319.48x1 lm		
Name: NS42-φ300-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H40mm	
	SUR.: D250mm	

Flux out:1644 lm

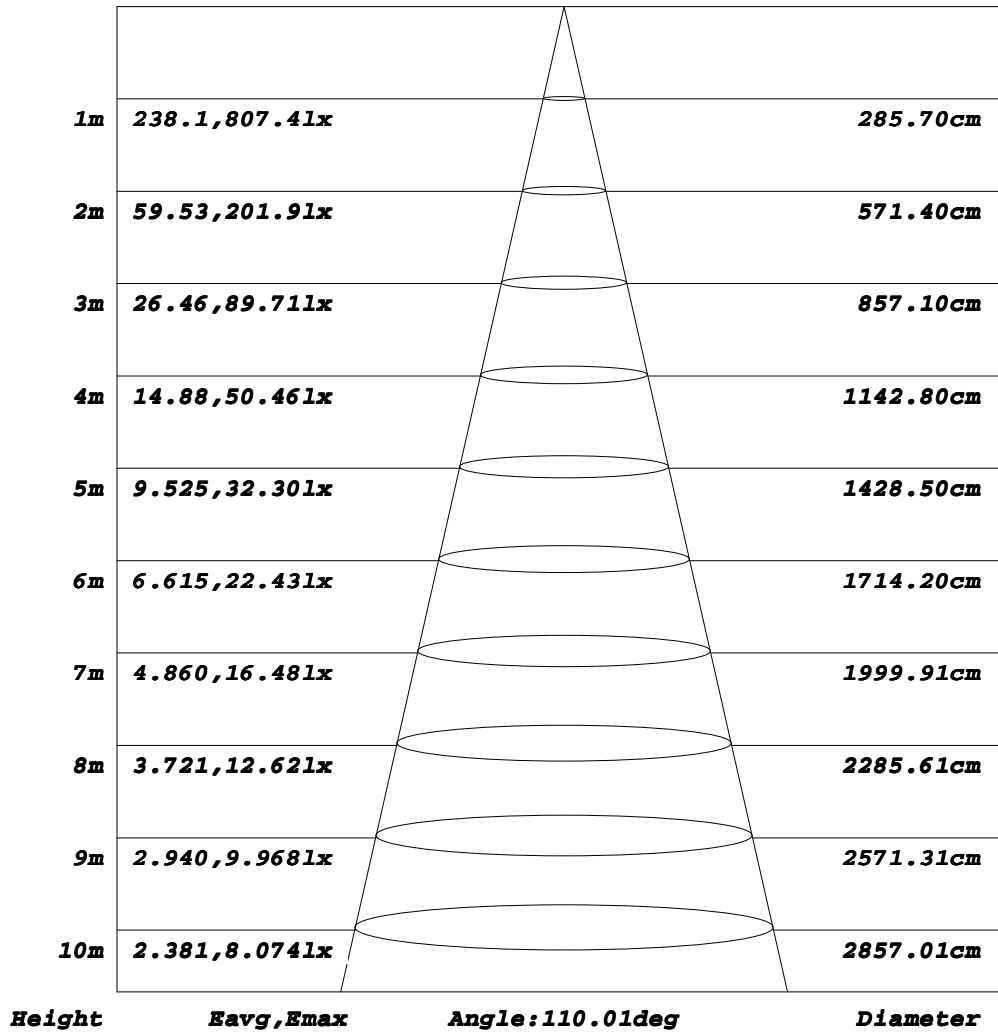


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.80V I:0.0960A P:19.800W PF:0.9260 Freq:50.00Hz Lamp Flux:2319.48x1 lm		
Name: NS42-φ300-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H40mm	
	SUR.: D250mm	

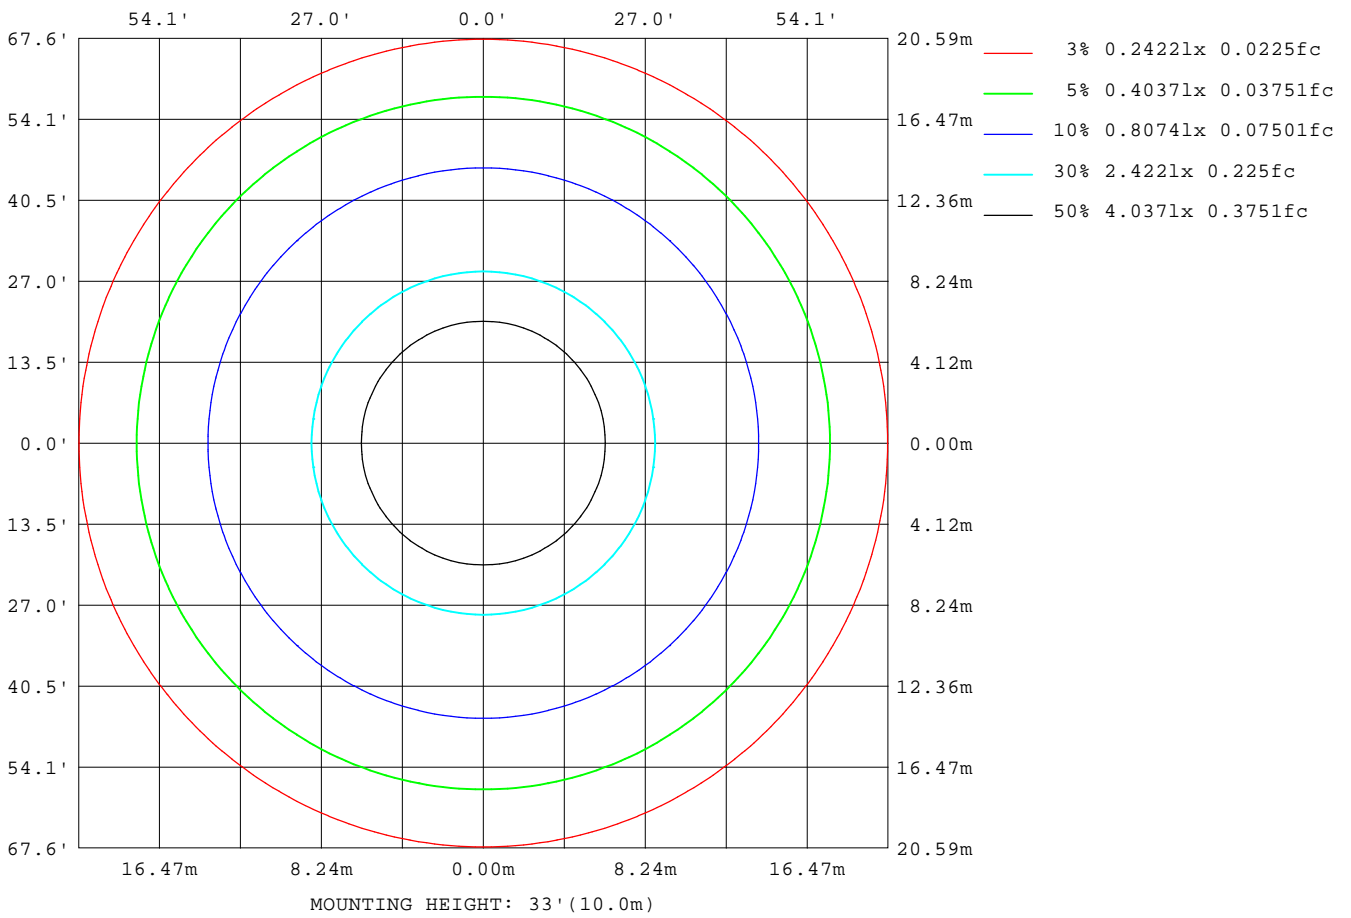

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

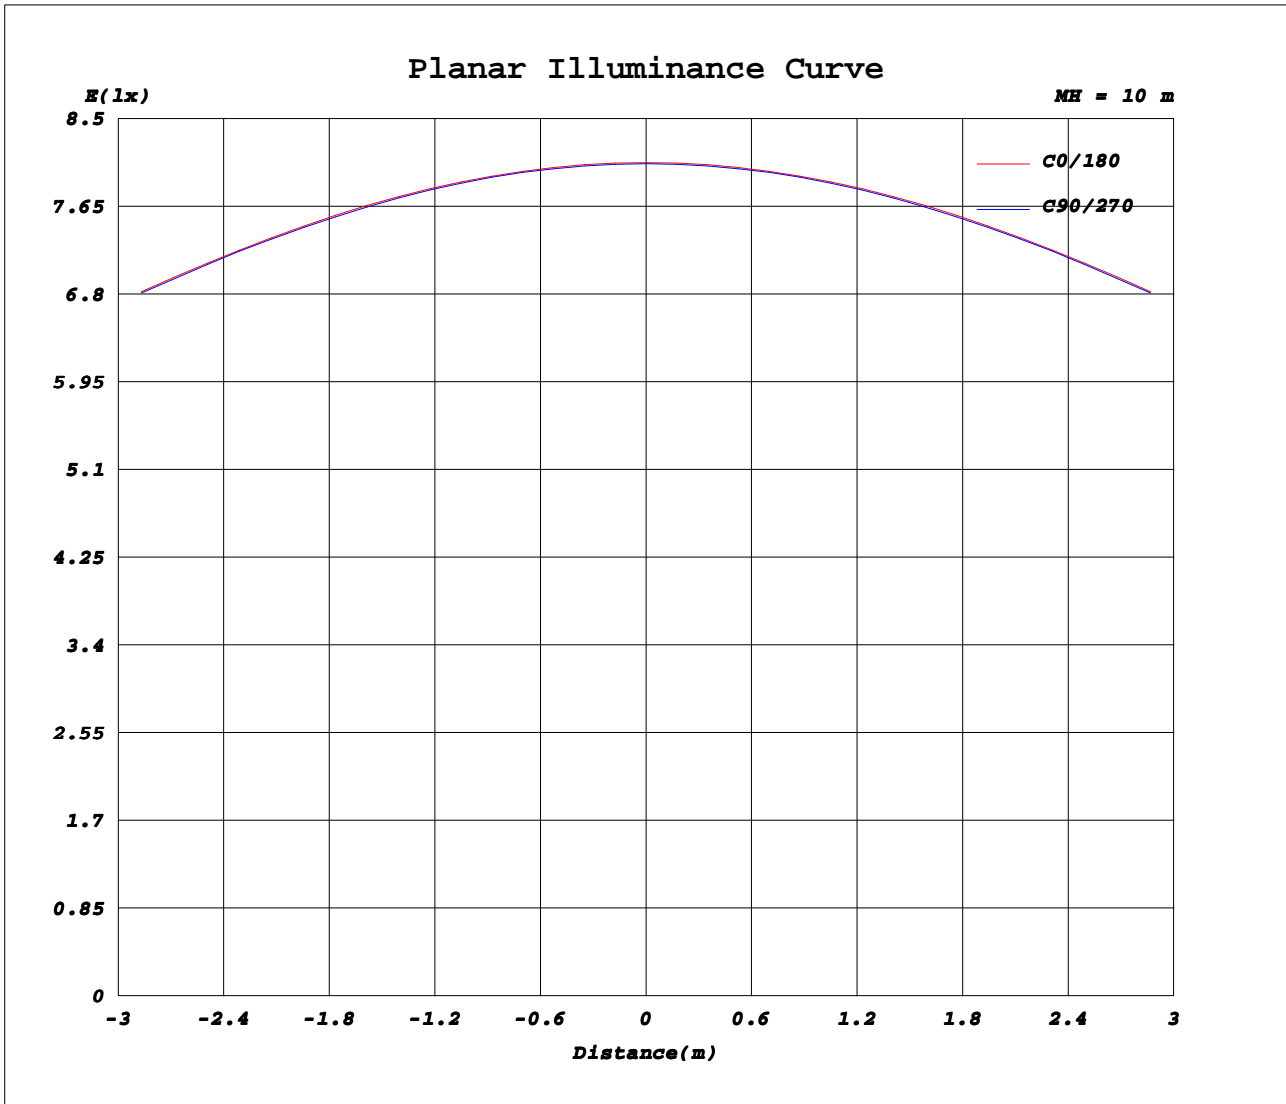

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.80V I:0.0960A P:19.800W PF:0.9260 Freq:50.00Hz Lamp Flux:2319.48x1 lm		
Name: NS42-φ300-20W	Type: LED	
MFR.: Lumega Group	DIM.: D300*H40mm	
	SUR.: D250mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	807	807	807	806	807	807	807	807	807	806	807	807							
5	804	803	803	802	803	803	804	803	803	802	803	803							
10	792	791	791	791	791	791	792	791	791	791	791	791							
15	773	772	772	771	772	772	773	772	772	771	772	772							
20	747	746	745	745	745	746	747	746	745	745	745	746							
25	714	713	712	712	712	713	714	713	712	712	712	713							
30	674	674	673	673	673	674	674	674	673	673	673	674							
35	630	629	628	628	628	629	630	629	628	628	628	629							
40	579	579	578	578	578	579	579	579	578	578	578	579							
45	524	523	523	523	523	523	524	523	523	523	523	523							
50	467	466	465	465	465	466	467	466	465	465	465	466							
55	405	404	404	404	404	404	405	404	404	404	404	404							
60	342	341	341	340	341	341	342	341	341	340	341	341							
65	278	277	276	276	276	277	278	277	276	276	276	277							
70	214	212	212	211	212	212	214	212	212	211	212	212							
75	152	150	149	148	149	150	152	150	149	148	149	150							
80	94.4	92.6	91.2	90.6	91.2	92.6	94.4	92.6	91.2	90.6	91.2	92.6							
85	43.8	42.4	41.4	41.0	41.4	42.4	43.8	42.4	41.4	41.0	41.4	42.4							
90	5.41	6.89	8.12	8.85	8.12	6.89	5.41	6.89	8.12	8.85	8.12	6.89							
95	5.04	5.08	5.06	5.01	5.06	5.08	5.04	5.08	5.06	5.01	5.06	5.08							
100	5.73	5.77	5.76	5.72	5.76	5.77	5.73	5.77	5.76	5.72	5.76	5.77							
105	6.49	6.54	6.53	6.49	6.53	6.54	6.49	6.54	6.53	6.49	6.53	6.54							
110	7.26	7.31	7.31	7.28	7.31	7.31	7.26	7.31	7.31	7.28	7.31	7.31							
115	8.04	8.10	8.10	8.07	8.10	8.10	8.04	8.10	8.10	8.07	8.10	8.10							
120	8.84	8.90	8.91	8.89	8.91	8.90	8.84	8.90	8.91	8.89	8.91	8.90							
125	9.63	9.70	9.71	9.69	9.71	9.70	9.63	9.70	9.71	9.69	9.71	9.70							
130	10.4	10.5	10.5	10.5	10.5	10.5	10.4	10.5	10.5	10.5	10.5	10.5							
135	11.1	11.2	11.2	11.2	11.2	11.2	11.1	11.2	11.2	11.2	11.2	11.2							
140	11.8	11.9	11.9	11.9	11.9	11.9	11.8	11.9	11.9	11.9	11.9	11.9							
145	12.5	12.6	12.6	12.6	12.6	12.6	12.5	12.6	12.6	12.6	12.6	12.6							
150	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2							
155	13.8	13.9	13.9	13.9	13.9	13.9	13.8	13.9	13.9	13.9	13.9	13.9							
160	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5							
165	15.2	15.1	15.1	15.0	15.1	15.1	15.2	15.1	15.1	15.0	15.1	15.1							
170	15.8	15.7	15.6	15.5	15.6	15.7	15.8	15.7	15.6	15.5	15.6	15.7							
175	16.2	16.1	16.0	15.9	16.0	16.1	16.2	16.1	16.0	15.9	16.0	16.1							
180	16.3	16.2	16.1	16.0	16.1	16.2	16.3	16.2	16.1	16.0	16.1	16.2							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: