
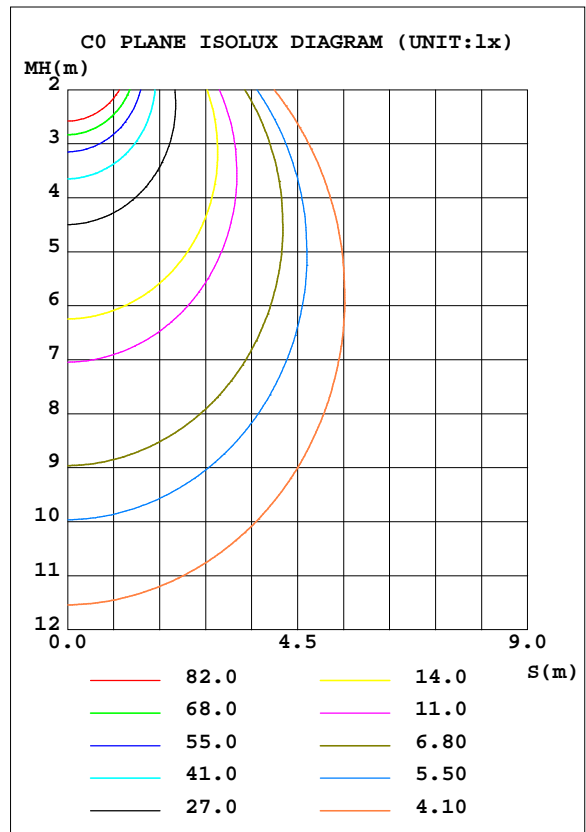


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.0640A P:14.300W PF:0.9710 Freq:50.00Hz Lamp Flux:1579.2x1 lm		
Name: NS44-φ220MM-15W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 110.43 lm/W			
MODEL		I _{max} (cd)	552.2	S/MH(C0/180)	1.22
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.33
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1579.2	η UP, DN(C0-180)	1.4,54.9
NOMINAL FLUX(lm)	1579.2	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.5,42.2
LAMPS INSIDE	1	η up(%)	2.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	221.6	η down(%)	97.1	CIBSE SHR MAX	1.35

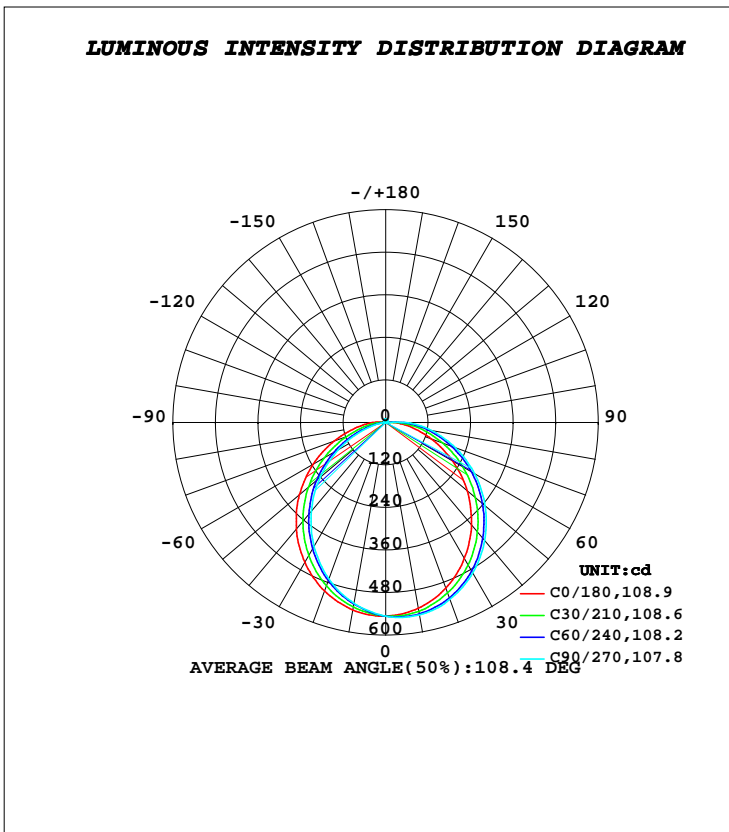

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	532.2	544.3	551.0	546.7	537.5	524.1	517.7	521.1	0- 10	51.55	51.55	3.26,3.26
20	497.3	518.8	530.4	523.8	505.8	482.5	469.6	477.3	10- 20	146.6	198.2	12.6,12.6
30	443.7	474.6	490.8	481.6	456.3	422.9	404.4	416.0	20- 30	219.6	417.8	26.5,26.5
40	377.1	414.5	434.7	422.9	392.2	350.4	326.7	342.6	30- 40	261.0	678.8	43,43
50	300.8	343.6	366.1	352.2	318.2	269.6	242.3	261.5	40- 50	266.6	945.3	59.9,59.9
60	218.2	265.5	290.6	274.6	236.6	184.3	155.0	176.2	50- 60	238.0	1183	74.9,74.9
70	137.7	184.7	209.9	193.1	155.0	102.8	74.27	96.04	60- 70	182.5	1366	86.5,86.5
80	71.00	108.9	131.4	113.1	82.86	40.04	16.97	38.52	70- 80	113.9	1480	93.7,93.7
90	26.71	42.84	55.75	45.77	35.04	9.590	4.144	11.14	80- 90	53.77	1534	97.1,97.1
100	3.481	2.871	3.002	2.819	4.447	4.911	5.155	5.035	90-100	11.64	1545	97.8,97.8
110	5.609	3.917	3.375	4.497	7.274	5.921	6.211	6.022	100-110	5.073	1550	98.2,98.2
120	5.554	4.814	4.437	4.693	6.237	6.779	7.079	6.867	110-120	5.419	1556	98.5,98.5
130	6.533	5.880	5.575	5.750	7.152	7.598	7.838	7.628	120-130	5.616	1561	98.9,98.9
140	7.395	6.839	6.590	6.722	7.982	8.271	8.470	8.241	130-140	5.531	1567	99.2,99.2
150	8.114	7.677	7.436	7.584	8.604	8.774	8.814	8.674	140-150	4.941	1572	99.5,99.5
160	8.751	8.439	8.348	8.388	9.081	9.175	9.206	9.060	150-160	3.927	1576	99.8,99.8
170	9.268	9.180	9.040	9.098	9.450	9.486	9.468	9.382	160-170	2.559	1578	99.9,99.9
180	9.770	9.712	9.491	9.583	9.759	9.703	9.499	9.571	170-180	0.9027	1579	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.0640A P:14.300W PF:0.9710 Freq:50.00Hz Lamp Flux:1579.2x1 lm		
Name: NS44-φ220MM-15W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

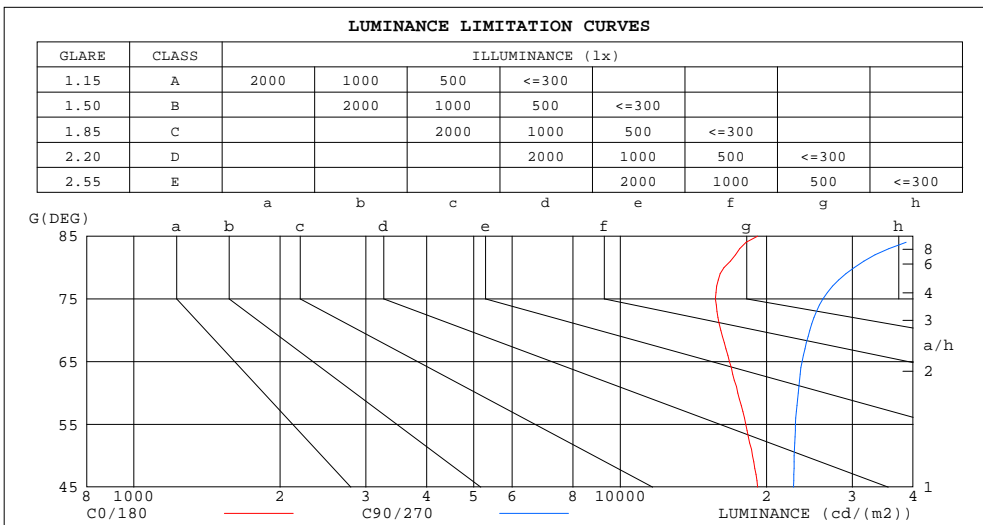

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	19164	42840
80	16355	30275
75	15705	26119
70	16100	24544
65	16787	23659
60	17452	23248
55	18132	22931
50	18721	22782
45	19171	22718


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.0640A P:14.300W PF:0.9710 Freq:50.00Hz		
Lamp Flux:1579.2x1 lm		
Name: NS44-φ220MM-15W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.02	.98	.94	.90	.96	.92	.95	.92	.89	.91	.88	.85	.87	.84	.82	.80
2.0	.89	.82	.76	.87	.80	.75	.83	.77	.73	.79	.75	.71	.76	.72	.69	.66
3.0	.78	.70	.63	.76	.69	.62	.73	.66	.61	.70	.64	.60	.67	.62	.58	.56
4.0	.69	.60	.54	.68	.59	.53	.65	.58	.52	.62	.56	.51	.60	.54	.50	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.49	.44	.54	.48	.43	.41
6.0	.56	.47	.40	.55	.46	.40	.52	.45	.39	.51	.44	.39	.49	.43	.38	.36
7.0	.51	.42	.36	.50	.41	.35	.48	.40	.35	.46	.39	.34	.44	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.36	.31	.42	.36	.31	.41	.35	.30	.28
9.0	.42	.34	.29	.42	.34	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

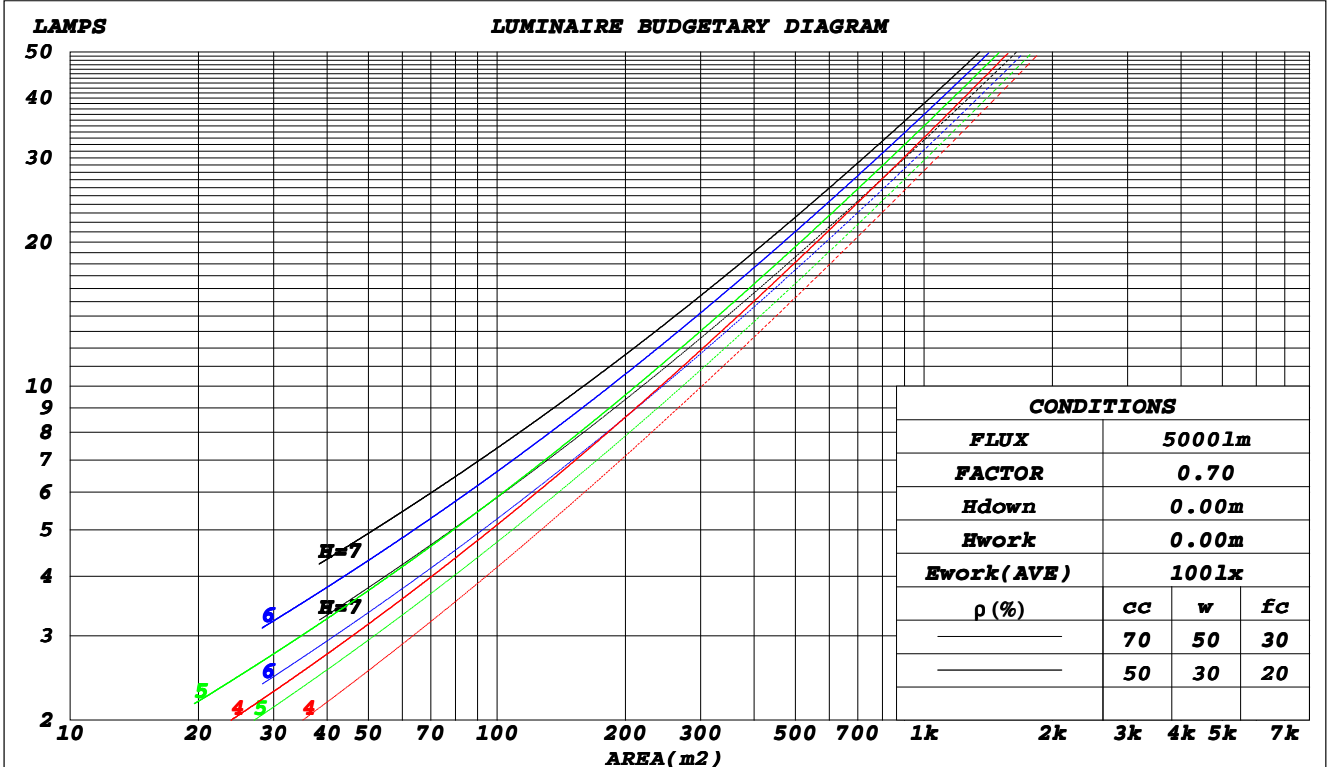

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.0640A P:14.300W PF:0.9710 Freq:50.00Hz		
Lamp Flux:1579.2x1 lm		
Name: NS44-φ220MM-15W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.325	.185	.059	.317	.181	.057	.302	.173	.055	.288	.166	.053	.275	.160	.051	
2.0	.298	.163	.050	.291	.160	.049	.278	.155	.048	.266	.149	.047	.254	.144	.045	
3.0	.273	.145	.044	.267	.143	.043	.255	.138	.042	.244	.134	.041	.234	.130	.040	
4.0	.251	.130	.038	.245	.128	.038	.235	.124	.037	.225	.121	.036	.216	.117	.036	
5.0	.231	.118	.034	.226	.116	.034	.217	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.214	.107	.031	.209	.106	.030	.201	.103	.030	.193	.100	.029	.186	.098	.029	
7.0	.199	.098	.028	.195	.097	.028	.187	.095	.027	.180	.092	.027	.173	.090	.026	
8.0	.185	.091	.025	.182	.090	.025	.175	.087	.025	.169	.085	.025	.163	.083	.024	
9.0	.174	.084	.023	.170	.083	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.149	.074	.021	.144	.073	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.212	.212	.212	.182	.182	.182	.124	.124	.124	.071	.071	.071	.023	.023	.023	
1.0	.204	.178	.155	.174	.153	.134	.119	.105	.092	.069	.061	.054	.022	.020	.017	
2.0	.195	.154	.120	.167	.133	.103	.115	.092	.072	.066	.053	.042	.021	.017	.014	
3.0	.188	.137	.096	.161	.118	.083	.110	.082	.059	.064	.048	.035	.020	.016	.011	
4.0	.180	.124	.081	.154	.107	.070	.106	.074	.049	.061	.044	.029	.020	.014	.010	
5.0	.172	.113	.070	.148	.098	.061	.102	.068	.043	.059	.040	.025	.019	.013	.008	
6.0	.165	.105	.062	.142	.091	.054	.098	.064	.038	.057	.037	.023	.018	.012	.007	
7.0	.158	.098	.056	.136	.085	.049	.094	.060	.035	.055	.035	.021	.018	.011	.007	
8.0	.152	.092	.052	.131	.080	.045	.090	.056	.032	.053	.033	.019	.017	.011	.006	
9.0	.146	.087	.048	.125	.076	.042	.087	.053	.030	.051	.031	.018	.016	.010	.006	
10.0	.140	.083	.045	.121	.072	.040	.084	.051	.028	.049	.030	.017	.016	.010	.006	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.0640A P:14.300W PF:0.9710 Freq:50.00Hz		
Lamp Flux:1579.2x1 lm		
Name: NS44-φ220MM-15W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.1	24.6	23.4	24.8	25.1	24.1	25.6	24.4	25.9	26.1
3H	24.6	26.0	24.9	26.3	26.6	26.1	27.4	26.4	27.7	28.0
4H	25.3	26.6	25.6	26.9	27.2	27.0	28.3	27.4	28.6	28.9
6H	25.8	27.0	26.2	27.4	27.7	27.9	29.2	28.3	29.5	29.8
8H	26.1	27.3	26.4	27.6	27.9	28.4	29.6	28.8	29.9	30.3
12H	26.3	27.4	26.7	27.8	28.1	28.9	30.0	29.3	30.4	30.8
4H 2H	23.9	25.2	24.3	25.6	25.9	24.7	26.0	25.1	26.3	26.6
3H	25.7	26.8	26.1	27.2	27.5	26.9	28.0	27.3	28.4	28.7
4H	26.5	27.5	26.9	27.9	28.3	28.0	29.0	28.4	29.4	29.8
6H	27.2	28.2	27.7	28.6	29.0	29.1	30.0	29.6	30.5	30.9
8H	27.5	28.4	28.0	28.8	29.3	29.7	30.5	30.1	31.0	31.4
12H	27.8	28.6	28.3	29.1	29.5	30.3	31.1	30.7	31.5	32.0
8H 4H	27.0	27.9	27.5	28.3	28.8	28.3	29.2	28.8	29.6	30.1
6H	28.0	28.8	28.5	29.2	29.7	29.7	30.4	30.2	30.9	31.3
8H	28.5	29.1	29.0	29.6	30.1	30.4	31.1	30.9	31.5	32.0
12H	28.9	29.5	29.4	30.0	30.5	31.2	31.7	31.7	32.2	32.8
12H 4H	27.2	28.0	27.6	28.4	28.9	28.3	29.2	28.8	29.6	30.1
6H	28.2	28.9	28.8	29.4	29.9	29.8	30.4	30.3	30.9	31.4
8H	28.8	29.4	29.3	29.9	30.4	30.6	31.1	31.1	31.6	32.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117, 1579 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.6)
 Area: 0.025 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.0640A P:14.300W PF:0.9710 Freq:50.00Hz Lamp Flux:1579.2x1 lm		
Name: NS44-φ220MM-15W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	54	44	38	31
0.80	66	55	47	65	54	47	63	53	47	39
1.00	75	63	56	73	63	56	71	64	55	48
1.25	82	71	64	80	70	63	77	68	62	54
1.50	87	76	69	85	75	69	81	73	67	59
2.00	93	84	78	91	83	77	87	81	75	67
2.50	97	89	83	95	88	82	91	85	80	71
3.00	101	93	88	98	92	86	94	88	84	75
4.00	105	99	94	102	97	92	97	93	89	79
5.00	107	102	98	104	100	96	99	96	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.0640A P:14.300W PF:0.9710 Freq:50.00Hz Lamp Flux:1579.2x1 lm		
Name: NS44-φ220MM-15W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

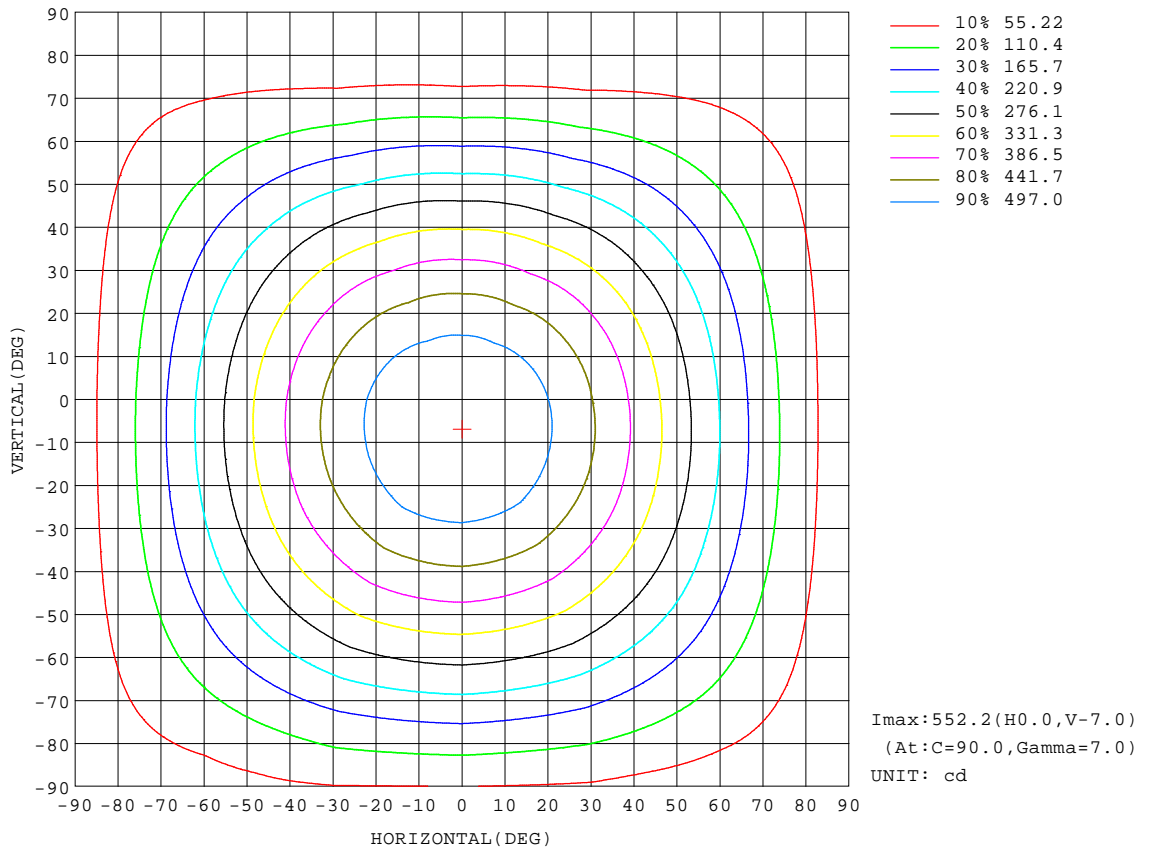


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.0640A P:14.300W PF:0.9710 Freq:50.00Hz Lamp Flux:1579.2x1 lm		
Name: NS44-φ220MM-15W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

Flux out:1046 lm

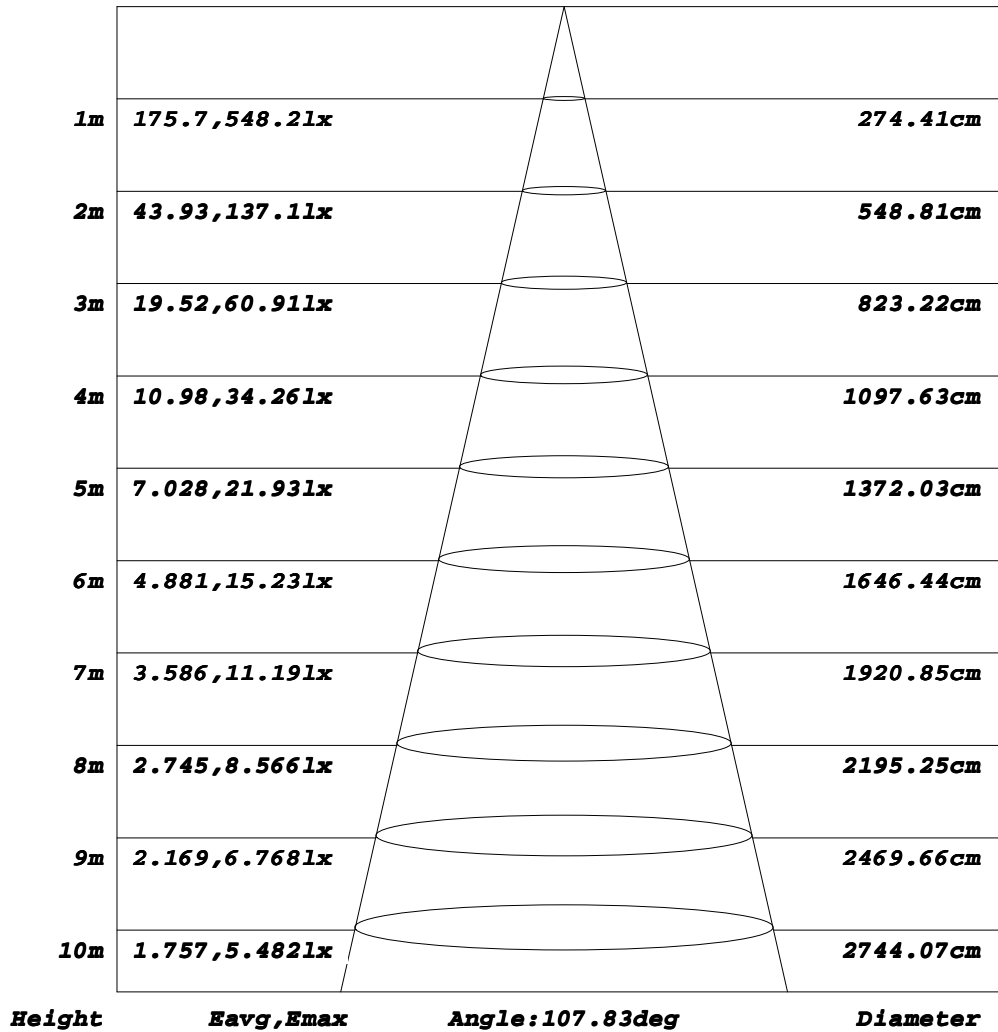


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.0640A P:14.300W PF:0.9710 Freq:50.00Hz Lamp Flux:1579.2x1 lm		
Name: NS44-φ220MM-15W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

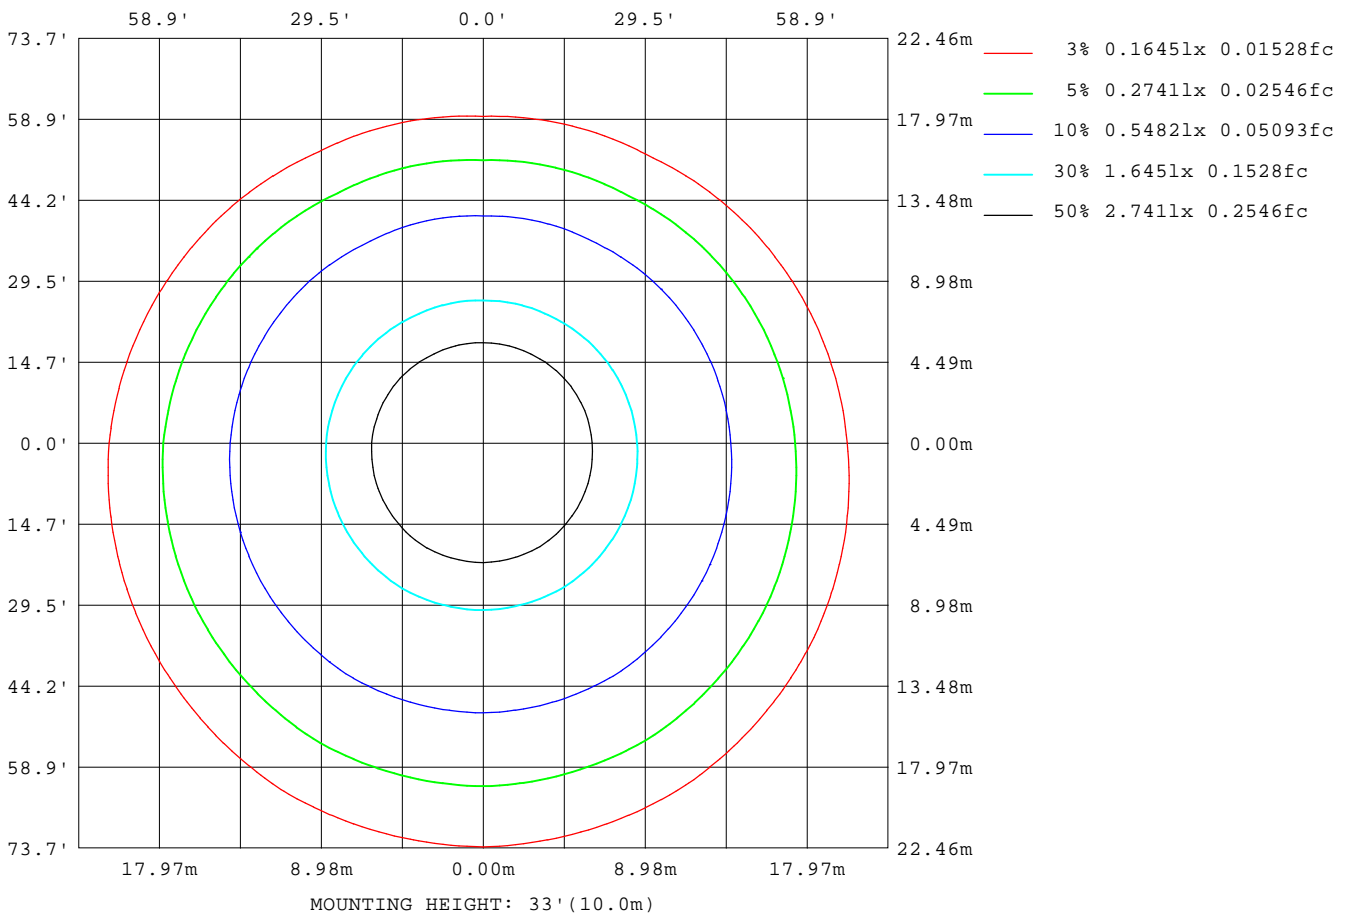

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

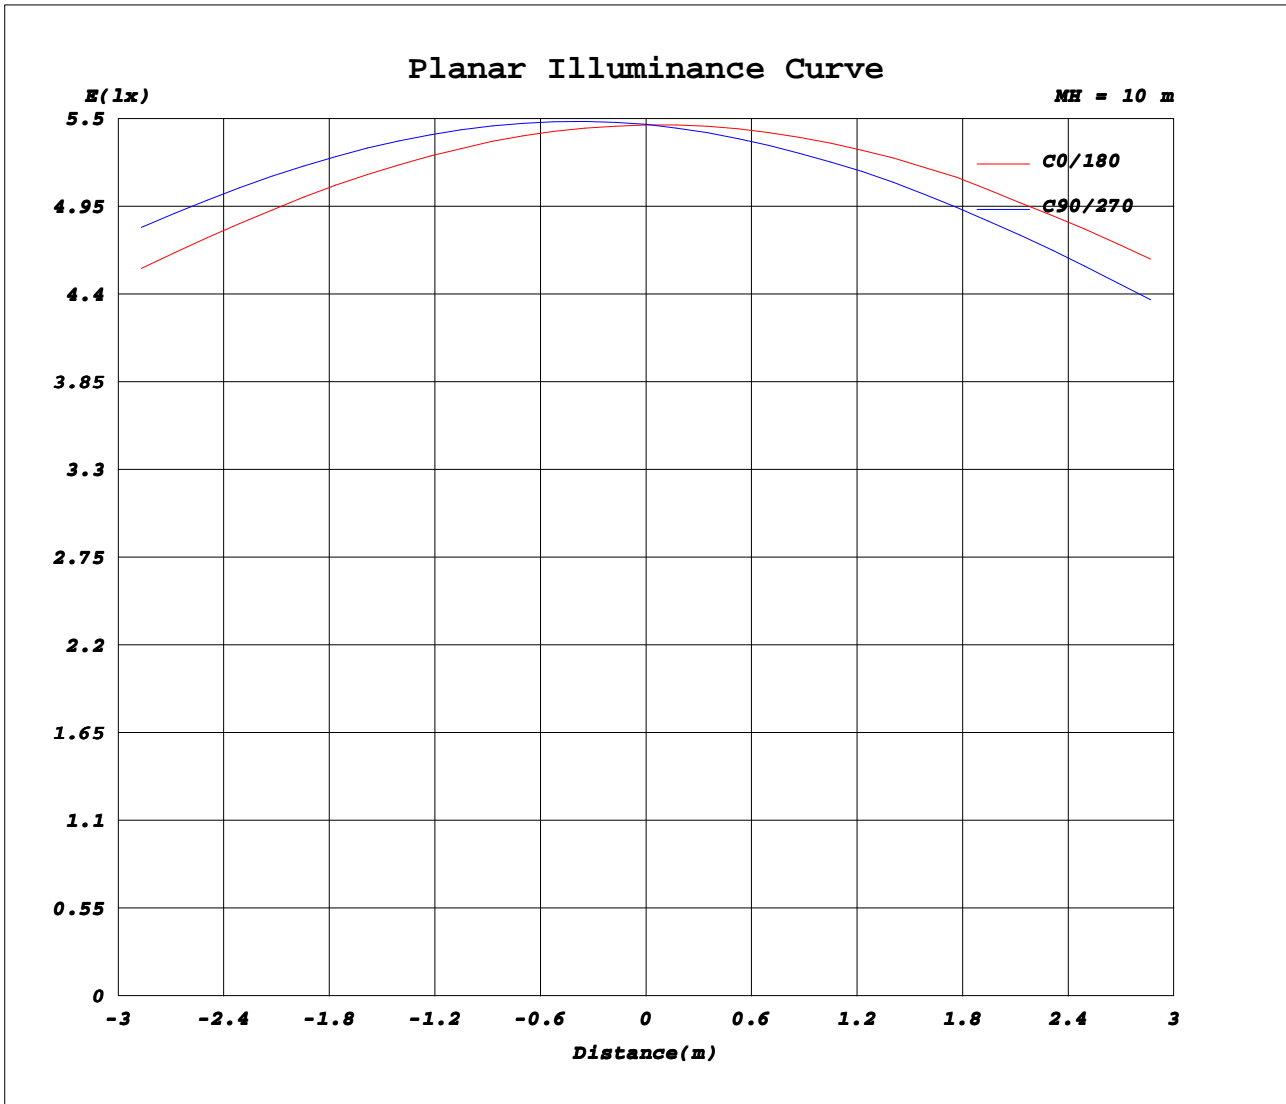

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.0640A P:14.300W PF:0.9710 Freq:50.00Hz Lamp Flux:1579.2x1 lm		
Name: NS44-φ220MM-15W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	546	546	547	546	546	545	546	546	547	546	546	545							
5	542	546	550	552	551	547	544	540	537	534	534	537							
10	532	541	548	551	549	544	538	528	520	518	518	524							
15	517	528	540	544	543	534	523	512	500	496	497	506							
20	497	511	526	530	530	518	506	490	475	470	471	483							
25	473	490	508	513	512	498	483	464	445	439	441	456							
30	444	465	485	491	489	474	456	434	412	404	407	425							
35	412	435	457	465	463	445	426	400	376	366	371	390							
40	377	403	426	435	432	414	392	364	337	327	332	353							
45	339	368	392	402	398	379	356	325	297	285	291	314							
50	301	330	357	366	363	342	318	284	255	242	249	274							
55	260	292	319	329	326	303	277	243	211	198	206	231							
60	218	251	280	291	286	263	237	200	168	155	163	190							
65	177	212	239	250	246	222	195	159	126	114	121	149							
70	138	171	198	210	204	182	155	119	86.7	74.3	82.4	110							
75	102	132	158	169	164	142	116	82.2	52.3	40.9	50.4	76.1							
80	71.0	97.4	120	131	125	101	82.9	53.2	26.9	17.0	27.3	49.7							
85	41.8	61.6	83.9	93.3	89.5	63.8	54.7	30.0	11.6	4.39	13.1	28.4							
90	26.7	34.2	51.5	55.8	53.7	37.8	35.0	14.6	4.58	4.14	5.99	16.3							
95	12.7	3.33	2.78	5.52	2.34	6.56	19.7	7.91	4.49	4.61	4.59	7.51							
100	3.48	3.06	2.69	3.00	2.69	2.95	4.45	4.78	5.04	5.16	5.14	4.93							
105	4.81	3.82	3.74	2.89	3.87	4.83	6.80	5.95	5.56	5.70	5.67	5.55							
110	5.61	4.25	3.59	3.37	3.56	5.43	7.27	5.80	6.04	6.21	6.16	5.89							
115	5.05	4.52	4.09	3.91	4.04	4.88	6.13	6.17	6.51	6.67	6.61	6.32							
120	5.55	5.03	4.60	4.44	4.53	4.86	6.24	6.62	6.93	7.08	7.02	6.72							
125	6.05	5.54	5.16	5.00	5.07	5.36	6.72	7.06	7.33	7.45	7.40	7.11							
130	6.53	6.06	5.70	5.58	5.61	5.89	7.15	7.46	7.73	7.84	7.77	7.49							
135	7.00	6.52	6.20	6.10	6.11	6.39	7.60	7.84	8.07	8.19	8.07	7.83							
140	7.40	7.00	6.67	6.59	6.58	6.86	7.98	8.18	8.36	8.47	8.34	8.14							
145	7.77	7.44	7.09	7.03	7.01	7.27	8.31	8.49	8.57	8.66	8.56	8.38							
150	8.11	7.84	7.51	7.44	7.45	7.72	8.60	8.77	8.78	8.81	8.76	8.59							
155	8.44	8.19	7.96	7.90	7.87	8.11	8.87	8.98	9.00	9.02	8.94	8.79							
160	8.75	8.54	8.34	8.35	8.27	8.50	9.08	9.14	9.21	9.21	9.17	8.95							
165	9.01	8.88	8.75	8.77	8.66	8.85	9.26	9.31	9.38	9.47	9.32	9.11							
170	9.27	9.22	9.14	9.04	9.03	9.17	9.45	9.53	9.44	9.47	9.45	9.31							
175	9.63	9.58	9.51	9.34	9.39	9.56	9.64	9.74	9.64	9.46	9.63	9.47							
180	9.77	9.80	9.62	9.49	9.56	9.61	9.76	9.78	9.63	9.50	9.56	9.58							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: