
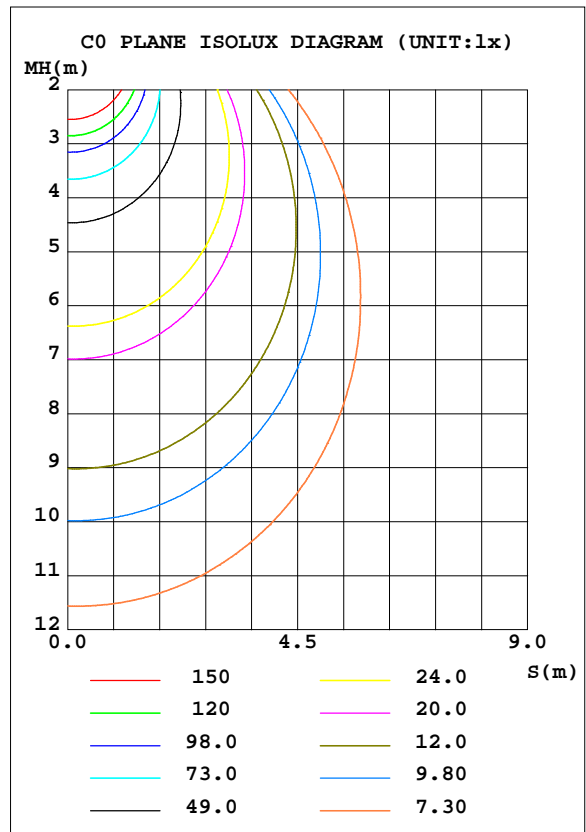


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.1400A P:29.100W PF:0.9600 Freq:50.00Hz		
Lamp Flux:2920.4x1 lm		
Name: NS44-φ275MM-30W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 100.36 lm/W			
MODEL		I _{max} (cd)	996.6	S/MH(C0/180)	1.29
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.38
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2920.4	η UP, DN(C0-180)	1.8,57.5
NOMINAL FLUX(lm)	2920.4	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.5,39.3
LAMPS INSIDE	1	η up(%)	3.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	221.6	η down(%)	96.7	CIBSE SHR MAX	1.35

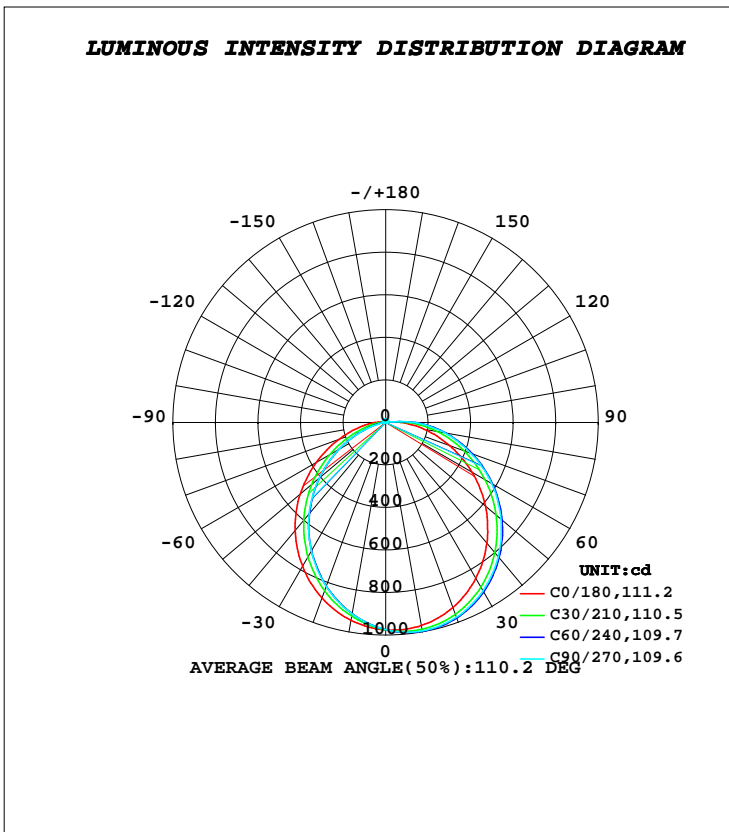

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp	
10	969.0	991.8	994.5	970.3	944.0	918.8	913.4	934.2	0- 10	92.02	92.02	3.15,3.15	
20	925.3	968.7	973.8	930.6	877.7	829.8	820.1	861.4	10- 20	262.5	354.5	12.1,12.1	
30	847.1	907.5	914.4	856.4	781.8	714.1	699.2	759.7	20- 30	395.1	749.6	25.7,25.7	
40	740.8	814.5	823.5	754.1	662.8	578.7	560.2	634.1	30- 40	472.6	1222	41.9,41.9	
50	612.8	696.4	707.7	630.6	524.8	430.8	409.5	493.5	40- 50	486.9	1709	58.5,58.5	
60	470.0	560.4	576.3	490.9	377.8	279.0	255.1	344.1	50- 60	439.7	2149	73.6,73.6	
70	321.7	413.9	427.1	346.2	234.9	140.0	111.7	198.3	60- 70	342.7	2491	85.3,85.3	
80	183.0	265.1	281.5	206.0	120.2	49.94	15.30	82.57	70- 80	221.1	2713	92.9,92.9	
90	77.74	118.2	131.1	82.36	48.96	15.76	8.216	27.01	80- 90	112.4	2825	96.7,96.7	
100	6.154	5.188	4.535	10.23	18.29	10.95	10.05	9.215	90-100	33.25	2858	97.9,97.9	
110	11.59	8.609	5.989	7.614	10.40	11.66	11.97	11.57	100-110	9.767	2868	98.2,98.2	
120	9.600	8.170	7.762	8.893	12.00	13.13	13.68	12.36	110-120	10.28	2878	98.6,98.6	
130	11.48	9.931	9.676	10.64	13.52	14.36	14.50	13.61	120-130	10.26	2889	98.9,98.9	
140	12.66	11.64	11.46	12.20	14.80	15.31	15.31	14.47	130-140	9.919	2898	99.2,99.2	
150	14.00	13.20	13.04	13.62	15.77	15.98	15.86	15.24	140-150	8.795	2907	99.6,99.6	
160	15.31	14.77	14.60	15.04	16.54	16.57	16.34	15.92	150-160	6.968	2914	99.8,99.8	
170	16.25	16.12	15.97	16.28	17.05	17.00	16.78	16.48	160-170	4.548	2919	99.9,99.9	
180	17.27	17.15	16.78	16.91	17.30	17.16	16.76	16.91	170-180	1.596	2920	100,100	
DEG	LUMINOUS INTENSITY:cd									UNIT:lm			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.1400A P:29.100W PF:0.9600 Freq:50.00Hz Lamp Flux:2920.4x1 lm		
Name: NS44-φ275MM-30W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

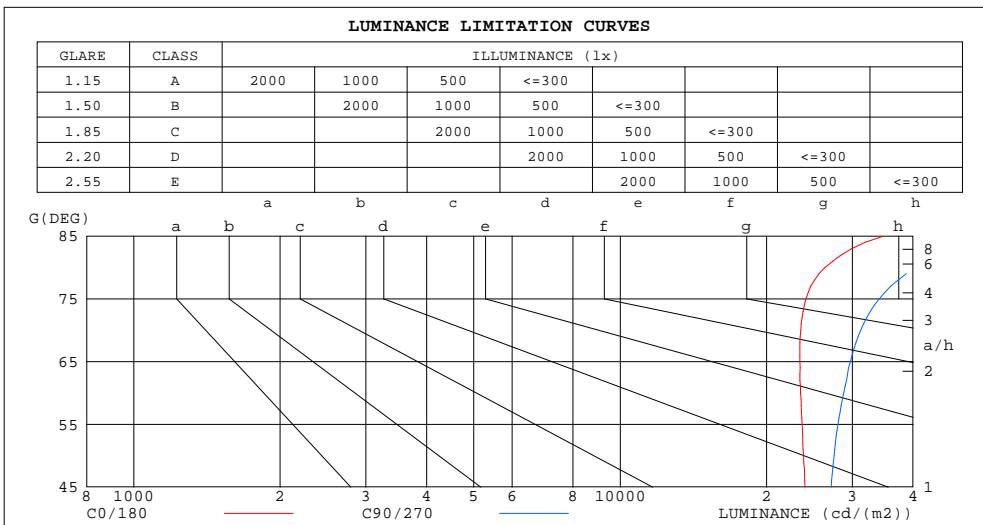

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	34759	58281
80	26352	40534
75	24096	34080
70	23517	31219
65	23430	29724
60	23499	28815
55	23664	28043
50	23833	27526
45	23971	27151


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.1400A P:29.100W PF:0.9600 Freq:50.00Hz		
Lamp Flux:2920.4x1 lm		
Name: NS44-φ275MM-30W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.02	.97	.93	.99	.95	.91	.94	.91	.88	.90	.87	.85	.86	.84	.81	.79
2.0	.88	.81	.75	.86	.80	.74	.82	.77	.72	.78	.74	.70	.75	.71	.68	.65
3.0	.78	.69	.62	.76	.68	.62	.72	.66	.60	.69	.63	.59	.66	.61	.57	.55
4.0	.69	.60	.53	.67	.59	.52	.64	.57	.51	.61	.55	.50	.59	.53	.49	.47
5.0	.61	.52	.45	.60	.51	.45	.57	.50	.44	.55	.49	.43	.53	.47	.43	.40
6.0	.55	.46	.40	.54	.45	.39	.52	.44	.39	.50	.43	.38	.48	.42	.37	.35
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.45	.39	.34	.44	.38	.33	.31
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.30	.40	.34	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.27	.38	.32	.27	.37	.31	.27	.25
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.34	.29	.24	.23

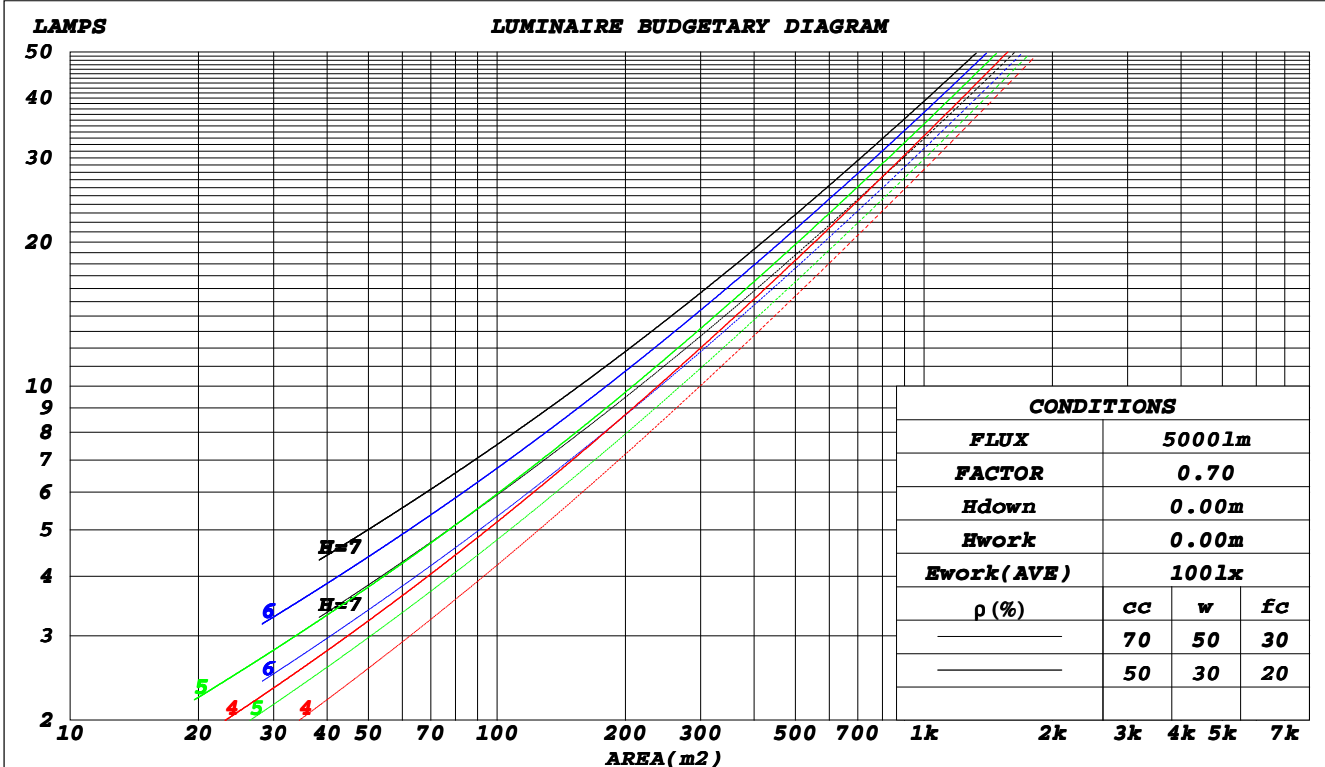

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.1400A P:29.100W PF:0.9600 Freq:50.00Hz		
Lamp Flux:2920.4x1 lm		
Name: NS44-φ275MM-30W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.332	.189	.060	.324	.185	.059	.309	.177	.057	.295	.170	.055	.282	.163	.053	
2.0	.303	.166	.051	.296	.163	.050	.282	.157	.049	.270	.151	.047	.258	.146	.046	
3.0	.277	.147	.044	.270	.145	.044	.258	.140	.043	.247	.135	.042	.237	.131	.041	
4.0	.253	.132	.039	.248	.130	.038	.237	.126	.038	.227	.122	.037	.218	.118	.036	
5.0	.233	.119	.034	.228	.117	.034	.218	.114	.033	.209	.110	.033	.201	.107	.032	
6.0	.215	.108	.031	.211	.106	.031	.202	.104	.030	.194	.101	.030	.187	.098	.029	
7.0	.200	.099	.028	.196	.098	.028	.188	.095	.027	.181	.093	.027	.174	.090	.027	
8.0	.186	.091	.026	.183	.090	.025	.176	.088	.025	.169	.086	.025	.163	.084	.024	
9.0	.174	.084	.024	.171	.083	.023	.165	.082	.023	.159	.080	.023	.153	.078	.023	
10.0	.164	.079	.022	.161	.078	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.215	.215	.215	.184	.184	.184	.126	.126	.126	.072	.072	.072	.023	.023	.023	
1.0	.207	.181	.158	.177	.155	.136	.121	.107	.094	.070	.062	.055	.022	.020	.018	
2.0	.199	.157	.122	.170	.135	.105	.117	.094	.074	.067	.054	.043	.022	.018	.014	
3.0	.191	.140	.099	.164	.121	.086	.113	.084	.060	.065	.049	.035	.021	.016	.012	
4.0	.183	.127	.083	.157	.109	.072	.108	.076	.051	.063	.045	.030	.020	.015	.010	
5.0	.176	.116	.072	.151	.101	.063	.104	.070	.044	.060	.041	.026	.019	.013	.009	
6.0	.169	.108	.065	.145	.094	.056	.100	.065	.040	.058	.039	.024	.019	.013	.008	
7.0	.162	.101	.059	.139	.088	.051	.096	.061	.036	.056	.036	.022	.018	.012	.007	
8.0	.155	.095	.054	.133	.083	.047	.092	.058	.034	.054	.034	.020	.017	.011	.007	
9.0	.149	.090	.051	.128	.079	.044	.089	.055	.032	.052	.033	.019	.017	.011	.006	
10.0	.143	.086	.048	.123	.075	.042	.086	.053	.030	.050	.031	.018	.016	.010	.006	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.1400A P:29.100W PF:0.9600 Freq:50.00Hz		
Lamp Flux:2920.4x1 lm		
Name: NS44-φ275MM-30W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.5	26.0	24.8	26.2	26.5	25.2	26.7	25.5	27.0	27.2
3H	26.2	27.6	26.6	27.9	28.2	27.3	28.6	27.6	28.9	29.2
4H	27.0	28.3	27.4	28.7	29.0	28.3	29.6	28.6	29.9	30.2
6H	27.8	29.0	28.1	29.3	29.7	29.3	30.5	29.7	30.9	31.2
8H	28.1	29.3	28.5	29.6	30.0	29.8	31.0	30.2	31.3	31.7
12H	28.4	29.6	28.8	29.9	30.3	30.3	31.5	30.7	31.8	32.2
4H 2H	25.4	26.7	25.7	27.0	27.3	25.9	27.2	26.3	27.5	27.9
3H	27.4	28.5	27.8	28.9	29.2	28.2	29.4	28.6	29.7	30.1
4H	28.3	29.4	28.8	29.8	30.2	29.4	30.4	29.8	30.8	31.2
6H	29.3	30.2	29.7	30.6	31.0	30.6	31.5	31.0	32.0	32.4
8H	29.7	30.6	30.1	31.0	31.4	31.2	32.1	31.7	32.5	33.0
12H	30.1	30.9	30.6	31.3	31.8	31.8	32.7	32.3	33.1	33.6
8H 4H	28.9	29.8	29.4	30.3	30.7	29.8	30.7	30.3	31.1	31.6
6H	30.1	30.9	30.6	31.3	31.8	31.3	32.0	31.8	32.5	33.0
8H	30.7	31.4	31.2	31.9	32.4	32.1	32.7	32.6	33.2	33.7
12H	31.3	31.9	31.8	32.4	32.9	32.9	33.5	33.4	34.0	34.5
12H 4H	29.1	29.9	29.6	30.3	30.8	29.9	30.7	30.4	31.1	31.6
6H	30.4	31.0	30.9	31.5	32.0	31.4	32.1	32.0	32.6	33.1
8H	31.1	31.6	31.6	32.1	32.7	32.3	32.9	32.9	33.4	34.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.5					+ 0.2 / - 0.4				

CIE Pub.117, 2920 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.7)
 Area: 0.04 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.1400A P:29.100W PF:0.9600 Freq:50.00Hz Lamp Flux:2920.4x1 lm		
Name: NS44-φ275MM-30W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	37	30
0.80	66	54	46	65	53	46	63	52	46	39
1.00	74	62	55	73	62	55	70	63	54	46
1.25	81	70	63	79	69	62	76	67	61	53
1.50	86	75	68	84	74	68	81	72	66	58
2.00	93	84	77	91	82	76	87	80	74	65
2.50	97	88	82	94	87	81	90	84	79	69
3.00	100	93	87	98	91	85	93	88	83	73
4.00	104	98	93	102	96	91	97	92	88	78
5.00	107	101	97	104	99	95	99	95	92	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.1400A P:29.100W PF:0.9600 Freq:50.00Hz		
Lamp Flux:2920.4x1 lm		
Name: NS44-φ275MM-30W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

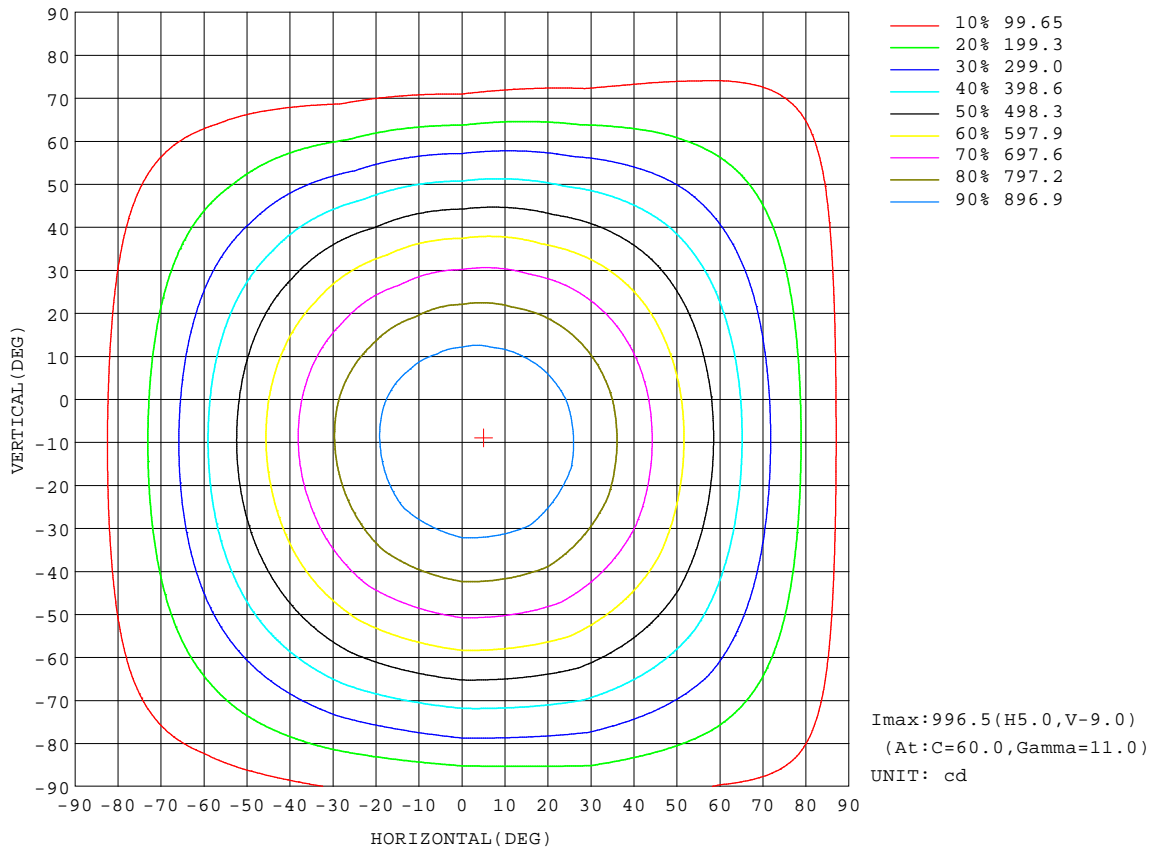


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.1400A P:29.100W PF:0.9600 Freq:50.00Hz		
Lamp Flux:2920.4x1 lm		
Name: NS44-φ275MM-30W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

Flux out:1938 lm

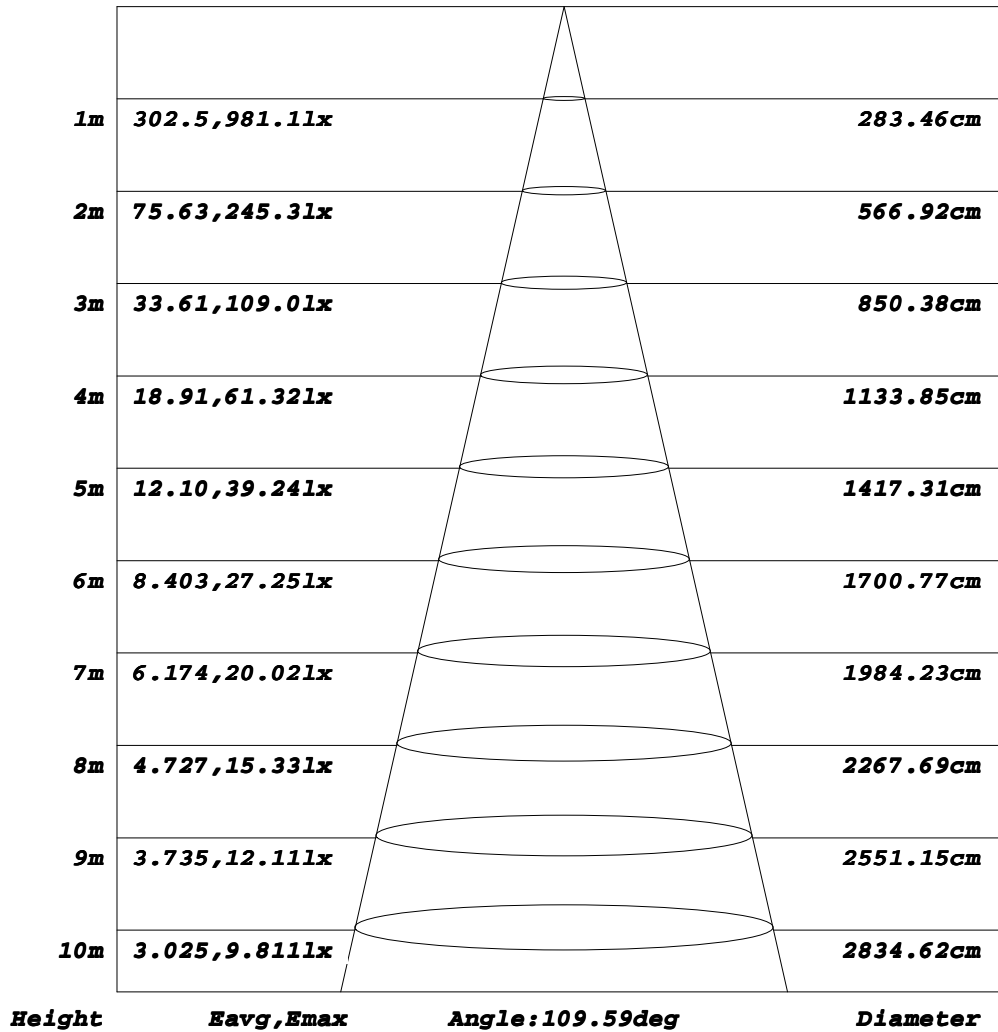


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.1400A P:29.100W PF:0.9600 Freq:50.00Hz		
Lamp Flux:2920.4x1 lm		
Name: NS44-φ275MM-30W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

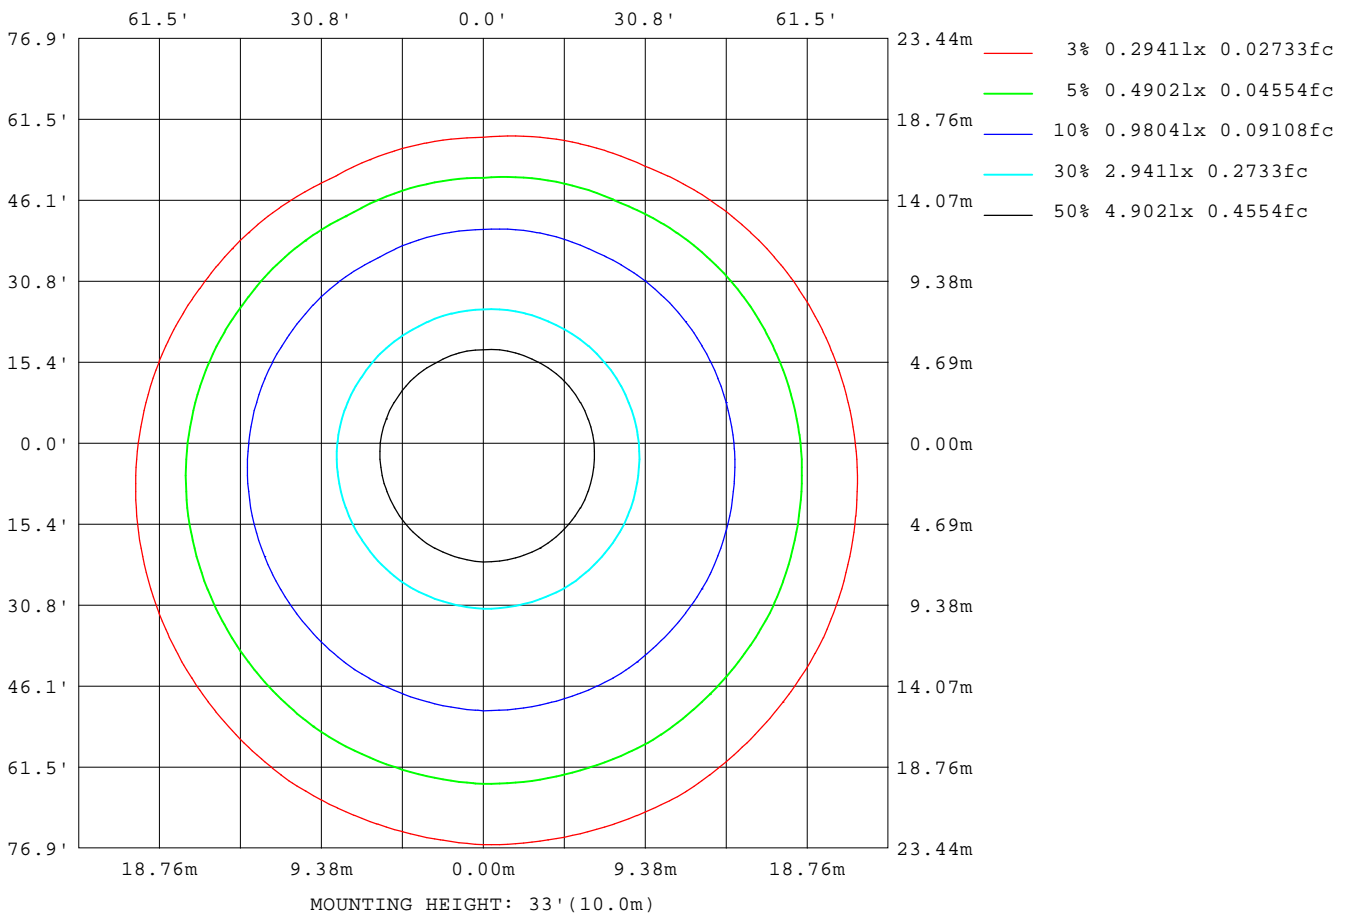

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

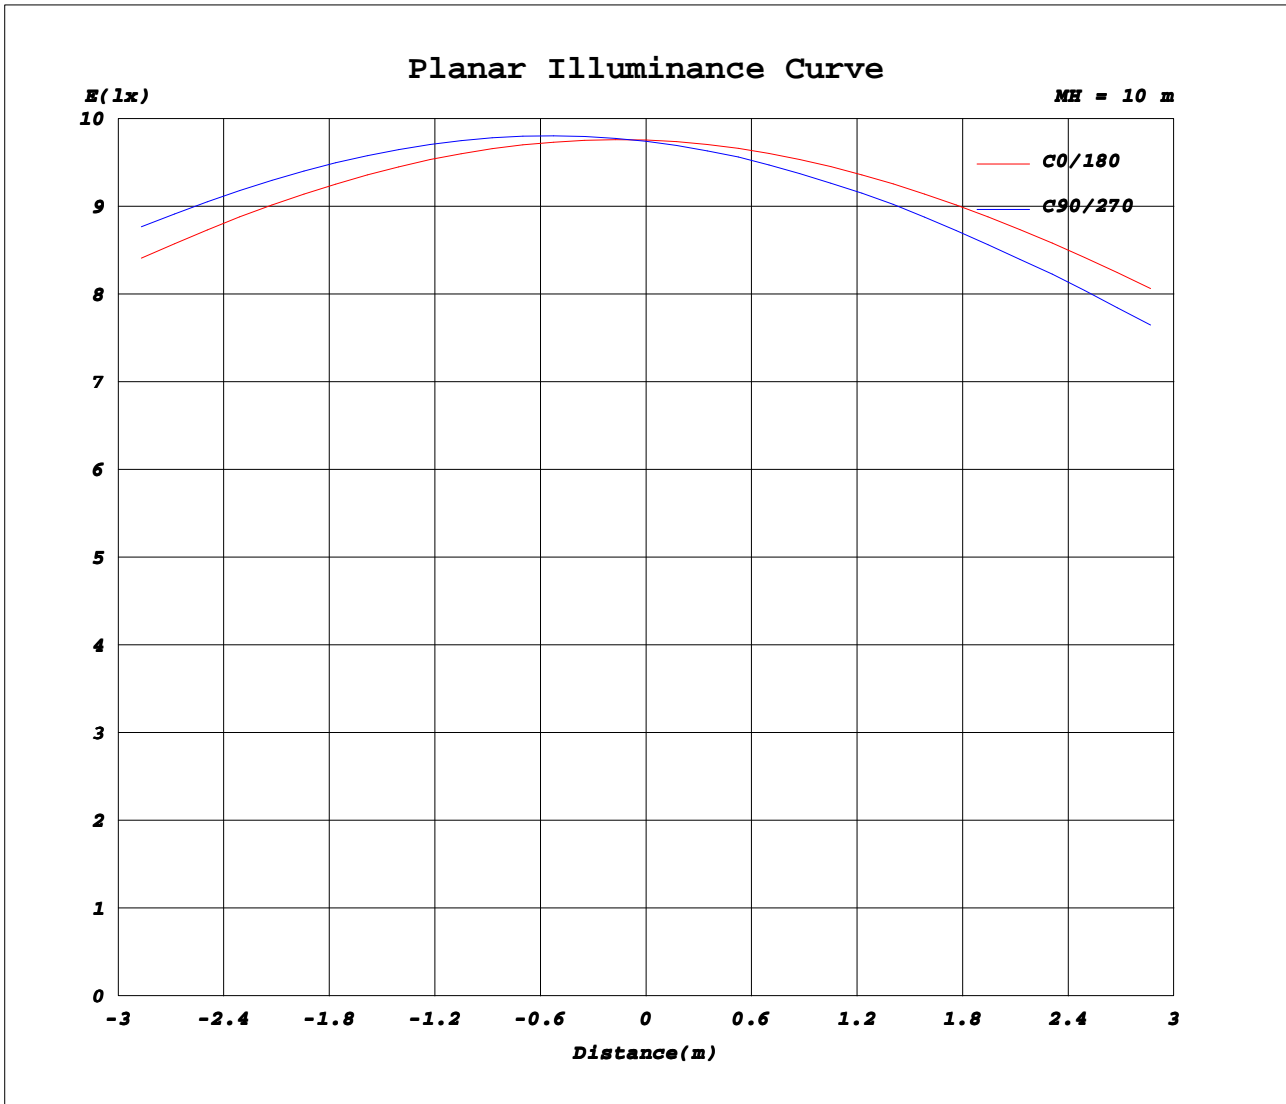

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.1400A P:29.100W PF:0.9600 Freq:50.00Hz		
Lamp Flux:2920.4x1 lm		
Name: NS44-φ275MM-30W(Half Moon)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	976	975	974	974	973	971	976	975	974	974	973	971							
5	977	986	991	990	982	970	965	954	948	948	953	962							
10	969	987	997	994	981	959	944	925	913	913	925	944							
15	951	978	992	989	971	939	915	887	869	870	887	917							
20	925	959	978	974	951	911	878	842	818	820	841	882							
25	890	931	954	948	921	874	833	789	760	762	789	838							
30	847	894	921	914	884	829	782	731	697	699	731	788							
35	797	850	879	872	838	778	725	667	631	632	668	732							
40	741	799	830	823	786	722	663	599	558	560	598	670							
45	678	741	774	768	728	660	597	528	483	486	526	604							
50	613	678	715	708	667	595	525	454	408	409	453	534							
55	543	611	650	643	600	524	451	379	330	332	376	462							
60	470	540	581	576	530	451	378	305	254	255	301	388							
65	396	467	509	502	458	381	305	232	181	180	227	314							
70	322	393	435	427	384	308	235	166	114	112	155	242							
75	249	320	359	353	309	235	173	111	63.1	54.4	93.5	174							
80	183	245	286	282	236	176	120	69.6	30.3	15.3	47.8	117							
85	121	170	212	203	166	114	78.6	40.9	13.5	7.45	15.1	74.3							
90	77.7	97.3	139	131	103	61.7	49.0	23.3	8.25	8.22	10.0	44.0							
95	38.9	21.6	46.8	56.8	43.3	32.1	29.6	14.4	9.12	9.08	8.72	20.0							
100	6.15	5.09	5.28	4.53	5.00	15.5	18.3	11.8	10.1	10.0	9.64	8.79							
105	8.07	6.20	6.61	5.33	5.81	10.3	13.0	11.5	11.1	11.0	10.5	9.88							
110	11.6	10.5	6.70	5.99	7.51	7.72	10.4	11.4	12.0	12.0	11.3	11.8							
115	11.3	11.2	7.01	6.86	7.53	8.56	11.2	12.1	12.7	13.0	12.1	11.3							
120	9.60	8.57	7.77	7.76	8.37	9.42	12.0	12.8	13.4	13.7	12.9	11.9							
125	10.7	9.29	8.68	8.70	9.25	10.3	12.8	13.5	14.0	14.0	13.8	12.6							
130	11.5	10.2	9.64	9.68	10.2	11.1	13.5	14.1	14.6	14.5	14.1	13.1							
135	11.9	11.1	10.5	10.6	11.0	11.9	14.2	14.7	15.0	15.0	14.3	13.7							
140	12.7	11.9	11.4	11.5	11.8	12.6	14.8	15.2	15.4	15.3	14.8	14.1							
145	13.4	12.7	12.2	12.3	12.5	13.3	15.3	15.6	15.7	15.6	15.2	14.6							
150	14.0	13.4	13.0	13.0	13.2	14.0	15.8	15.9	16.0	15.9	15.5	15.0							
155	14.7	14.2	13.8	13.8	14.0	14.6	16.2	16.3	16.3	16.1	15.8	15.4							
160	15.3	14.9	14.6	14.6	14.7	15.3	16.5	16.6	16.5	16.3	16.1	15.7							
165	15.9	15.6	15.4	15.4	15.4	15.9	16.9	16.9	16.8	16.7	16.5	16.1							
170	16.3	16.1	16.1	16.0	16.1	16.4	17.1	17.2	16.8	16.8	16.7	16.3							
175	16.9	16.9	16.7	16.5	16.6	16.9	17.2	17.3	17.0	16.8	16.9	16.6							
180	17.3	17.3	17.0	16.8	16.9	17.0	17.3	17.3	17.0	16.8	16.9	17.0							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: