
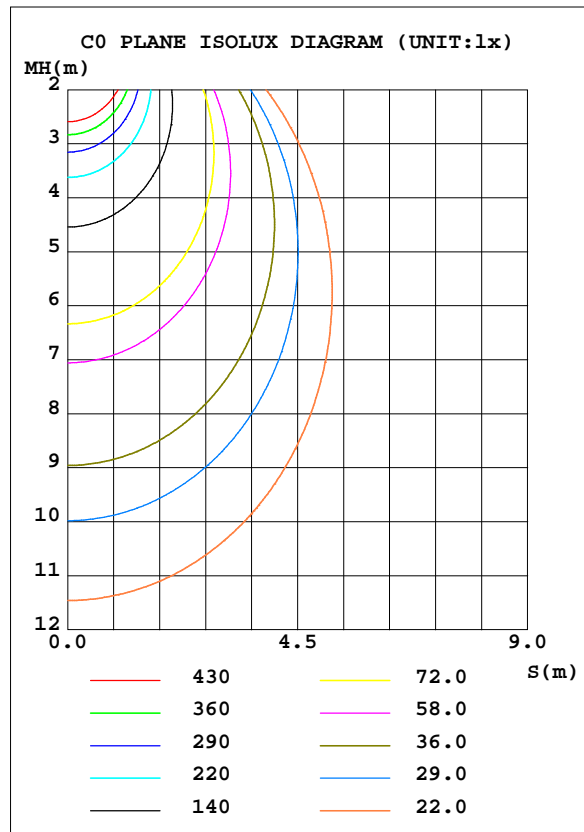


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.70V I:0.2670A P:59.700W PF:0.9680 Freq:50.00Hz		
Lamp Flux:7857.31lx1 lm		
Name: NS50-2000MM-60W	Type: LED	
MFR.:	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 131.61 lm/W			
MODEL		I _{max} (cd)	2928	S/MH(C0/180)	1.16
NOMINAL POWER(W)	60	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	7857.3	η UP, DN(C0-180)	1.3,48.7
NOMINAL FLUX(lm)	7857.31	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3,48.7
LAMPS INSIDE	1	η up(%)	2.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.4	CIBSE SHR MAX	1.35

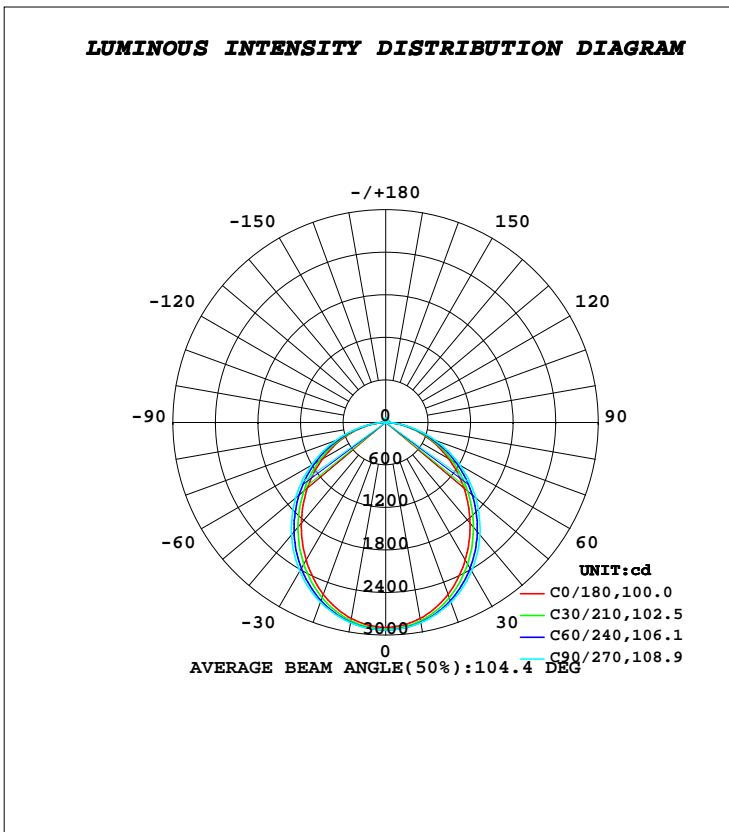

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2807	2850	2867	2850	2807	2850	2867	2850	0- 10	275.0	275.0	3.5,3.5
20	2578	2651	2696	2651	2578	2651	2696	2651	10- 20	778.2	1053	13.4,13.4
30	2244	2346	2423	2346	2244	2346	2423	2346	20- 30	1153	2206	28.1,28.1
40	1852	1969	2069	1969	1852	1969	2069	1969	30- 40	1351	3558	45.3,45.3
50	1444	1554	1661	1554	1444	1554	1661	1554	40- 50	1360	4917	62.6,62.6
60	1029	1121	1212	1121	1029	1121	1212	1121	50- 60	1196	6114	77.8,77.8
70	627.2	689.0	748.5	689.0	627.2	689.0	748.5	689.0	60- 70	894.8	7008	89.2,89.2
80	257.8	281.8	300.8	281.8	257.8	281.8	300.8	281.8	70- 80	506.4	7515	95.6,95.6
90	21.39	22.60	23.65	22.60	21.39	22.60	23.65	22.60	80- 90	137.9	7653	97.4,97.4
100	19.97	21.21	22.29	21.21	19.97	21.21	22.29	21.21	90-100	21.61	7674	97.7,97.7
110	24.67	25.67	26.48	25.67	24.67	25.67	26.48	25.67	100-110	24.71	7699	98,98
120	30.09	30.56	30.67	30.56	30.09	30.56	30.67	30.56	110-120	27.80	7727	98.3,98.3
130	35.76	35.74	35.73	35.74	35.76	35.74	35.73	35.74	120-130	29.62	7756	98.7,98.7
140	41.15	41.26	41.96	41.26	41.15	41.26	41.96	41.26	130-140	29.77	7786	99.1,99.1
150	46.19	46.66	48.07	46.66	46.19	46.66	48.07	46.66	140-150	27.64	7814	99.4,99.4
160	51.21	51.79	53.31	51.79	51.21	51.79	53.31	51.79	150-160	22.81	7837	99.7,99.7
170	55.50	55.86	57.05	55.86	55.50	55.86	57.05	55.86	160-170	15.28	7852	99.9,99.9
180	56.02	57.14	58.19	57.14	56.02	57.14	58.19	57.14	170-180	5.411	7857	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.70V I:0.2670A P:59.700W PF:0.9680 Freq:50.00Hz		
Lamp Flux:7857.31x1 lm		
Name: NS50-2000MM-60W	Type: LED	
MFR.:	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

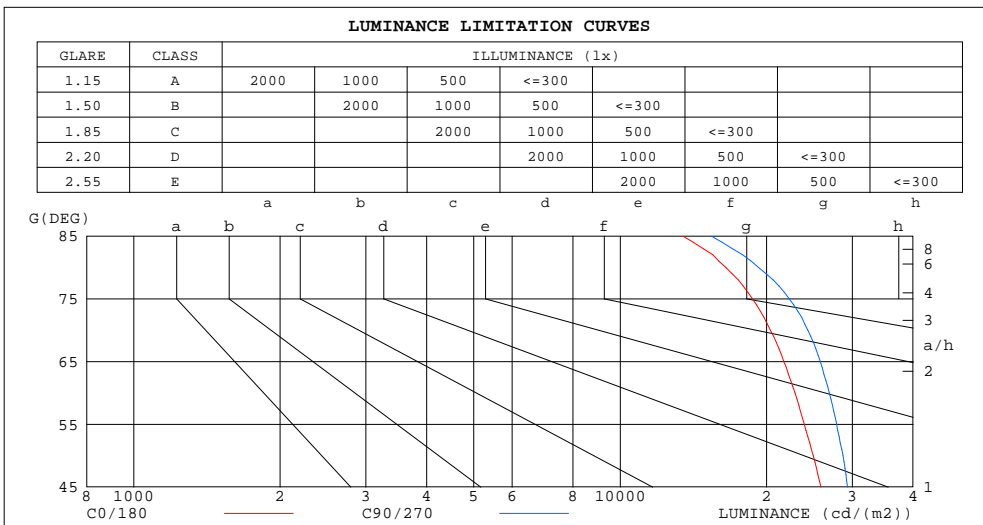

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	13468	15417
80	16497	19247
75	18707	22256
70	20375	24316
65	21716	25797
60	22871	26924
55	23918	27861
50	24959	28715
45	25883	29352


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.70V I:0.2670A P:59.700W PF:0.9680 Freq:50.00Hz		
Lamp Flux:7857.31lx1 lm		
Name: NS50-2000MM-60W	Type: LED	
MFR.:	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.04	.99	.96	1.01	.97	.94	.96	.93	.90	.92	.90	.87	.88	.86	.84	.82
2.0	.91	.84	.78	.88	.82	.77	.84	.79	.75	.81	.77	.73	.77	.74	.71	.68
3.0	.80	.72	.65	.78	.70	.64	.75	.68	.63	.71	.66	.62	.69	.64	.60	.58
4.0	.71	.62	.55	.69	.61	.55	.66	.59	.54	.64	.58	.53	.61	.56	.52	.50
5.0	.63	.54	.48	.62	.54	.47	.60	.52	.47	.57	.51	.46	.55	.50	.45	.43
6.0	.57	.48	.42	.56	.48	.42	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.33	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.36	.30	.26	.24

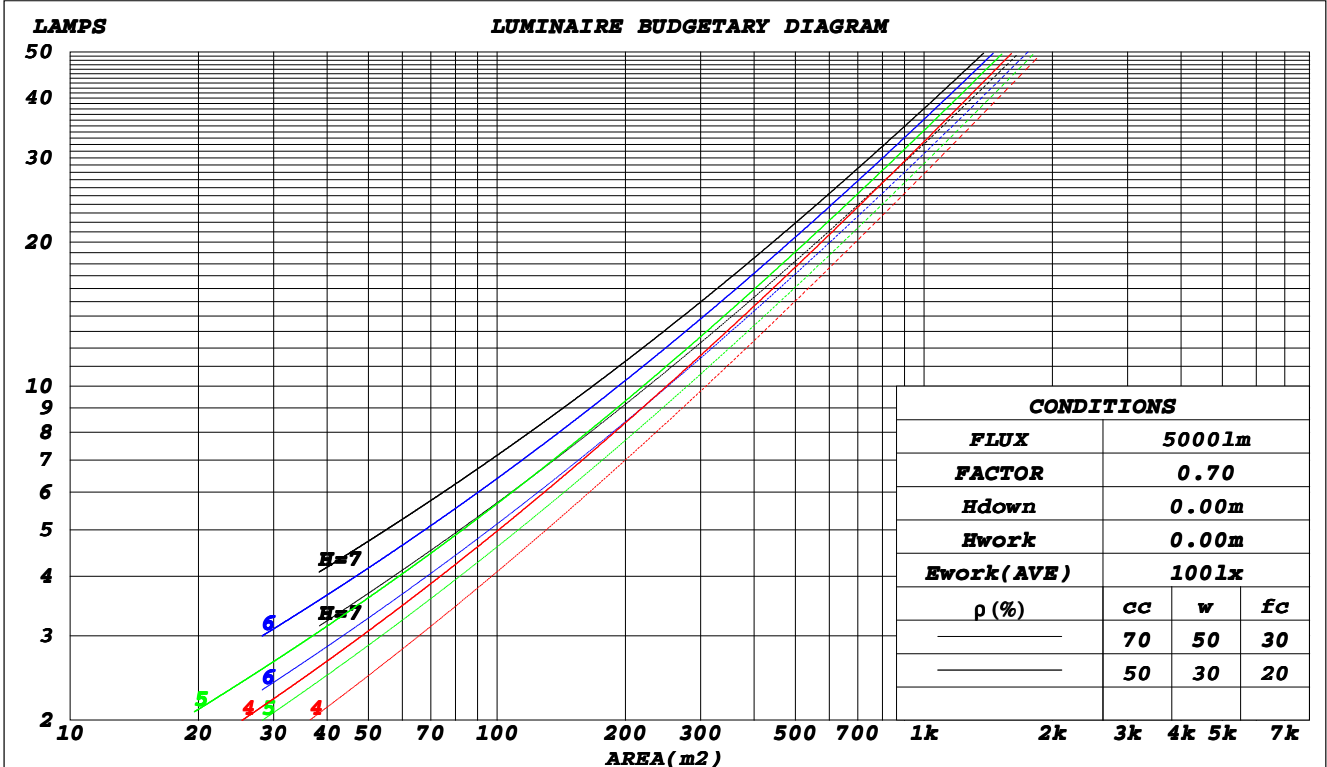

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:230.70V I:0.2670A P:59.700W PF:0.9680 Freq:50.00Hz		
Lamp Flux:7857.31lx1 lm		
Name: NS50-2000MM-60W	Type: LED	
MFR.:	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.303	.172	.055	.295	.168	.053	.280	.161	.051	.267	.154	.049	.254	.147	.047	
2.0	.285	.156	.048	.278	.153	.047	.265	.147	.046	.253	.142	.044	.242	.137	.043	
3.0	.264	.141	.042	.258	.138	.042	.246	.134	.041	.236	.129	.040	.226	.125	.039	
4.0	.244	.127	.037	.239	.125	.037	.228	.121	.036	.219	.117	.035	.210	.114	.035	
5.0	.226	.115	.033	.221	.114	.033	.212	.110	.032	.203	.107	.032	.195	.104	.031	
6.0	.210	.105	.030	.205	.104	.030	.197	.101	.029	.190	.098	.029	.182	.096	.029	
7.0	.195	.097	.027	.192	.095	.027	.184	.093	.027	.177	.091	.026	.171	.089	.026	
8.0	.183	.089	.025	.179	.088	.025	.173	.086	.025	.166	.084	.024	.160	.082	.024	
9.0	.171	.083	.023	.168	.082	.023	.162	.080	.023	.157	.078	.022	.151	.077	.022	
10.0	.161	.077	.021	.158	.077	.021	.153	.075	.021	.148	.073	.021	.143	.072	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.210	.210	.210	.180	.180	.180	.123	.123	.123	.070	.070	.070	.023	.023	.023	
1.0	.200	.176	.155	.171	.151	.133	.117	.104	.092	.067	.060	.054	.022	.019	.017	
2.0	.191	.152	.119	.164	.131	.103	.112	.091	.072	.065	.053	.042	.021	.017	.014	
3.0	.184	.135	.095	.157	.116	.083	.108	.081	.058	.062	.047	.034	.020	.015	.011	
4.0	.176	.121	.079	.151	.105	.069	.104	.073	.049	.060	.043	.029	.019	.014	.009	
5.0	.169	.111	.068	.145	.096	.059	.100	.067	.042	.058	.039	.025	.019	.013	.008	
6.0	.161	.102	.060	.139	.089	.052	.096	.062	.037	.056	.037	.022	.018	.012	.007	
7.0	.155	.096	.054	.133	.083	.047	.092	.058	.033	.053	.034	.020	.017	.011	.007	
8.0	.148	.090	.050	.128	.078	.043	.088	.055	.031	.051	.032	.018	.017	.011	.006	
9.0	.142	.085	.046	.123	.074	.040	.085	.052	.029	.049	.031	.017	.016	.010	.006	
10.0	.137	.081	.043	.118	.070	.038	.082	.049	.027	.048	.029	.016	.015	.010	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.70V I:0.2670A P:59.700W PF:0.9680 Freq:50.00Hz		
Lamp Flux:7857.31x1 lm		
Name: NS50-2000MM-60W	Type: LED	
MFR.:	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.6	25.1	23.9	25.3	25.6	24.3	25.7	24.6	26.0	26.2
3H	25.0	26.3	25.3	26.6	26.9	25.8	27.1	26.1	27.4	27.7
4H	25.5	26.8	25.9	27.1	27.4	26.3	27.6	26.7	27.9	28.2
6H	25.9	27.1	26.3	27.4	27.8	26.7	27.9	27.1	28.3	28.6
8H	26.0	27.2	26.4	27.5	27.9	26.9	28.0	27.2	28.3	28.7
12H	26.1	27.2	26.5	27.5	27.9	26.9	28.0	27.3	28.4	28.7
4H 2H	24.3	25.5	24.6	25.8	26.1	24.8	26.0	25.1	26.3	26.6
3H	25.8	26.9	26.2	27.3	27.6	26.4	27.6	26.8	27.9	28.3
4H	26.5	27.5	26.9	27.9	28.3	27.2	28.2	27.6	28.5	28.9
6H	27.0	27.9	27.4	28.3	28.7	27.7	28.6	28.1	29.0	29.4
8H	27.1	28.0	27.6	28.4	28.8	27.8	28.7	28.3	29.1	29.5
12H	27.2	28.0	27.7	28.4	28.9	27.9	28.7	28.4	29.1	29.6
8H 4H	26.8	27.6	27.2	28.0	28.5	27.4	28.2	27.8	28.6	29.1
6H	27.4	28.1	27.9	28.6	29.0	28.0	28.7	28.5	29.2	29.7
8H	27.6	28.3	28.1	28.7	29.2	28.3	28.9	28.8	29.4	29.9
12H	27.8	28.3	28.3	28.8	29.4	28.4	29.0	29.0	29.5	30.0
12H 4H	26.8	27.6	27.2	28.0	28.4	27.4	28.1	27.8	28.6	29.0
6H	27.5	28.1	28.0	28.5	29.1	28.1	28.7	28.6	29.2	29.7
8H	27.7	28.3	28.3	28.8	29.3	28.3	28.9	28.9	29.4	29.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.1 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 7857 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 7.2)
 Area: 0.09 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.70V I:0.2670A P:59.700W PF:0.9680 Freq:50.00Hz Lamp Flux:7857.31x1 lm		
Name: NS50-2000MM-60W	Type: LED	
MFR.:	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	40	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	64	58	72	66	57	50
1.25	83	73	66	81	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	69	62
2.00	95	86	80	93	85	79	89	82	77	69
2.50	99	91	85	96	89	84	92	86	82	73
3.00	102	95	90	100	93	88	95	90	86	77
4.00	106	100	96	103	98	94	99	94	91	81
5.00	108	103	99	106	101	98	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.70V I:0.2670A P:59.700W PF:0.9680 Freq:50.00Hz		
Lamp Flux:7857.31x1 lm		
Name: NS50-2000MM-60W	Type: LED	
MFR.:	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

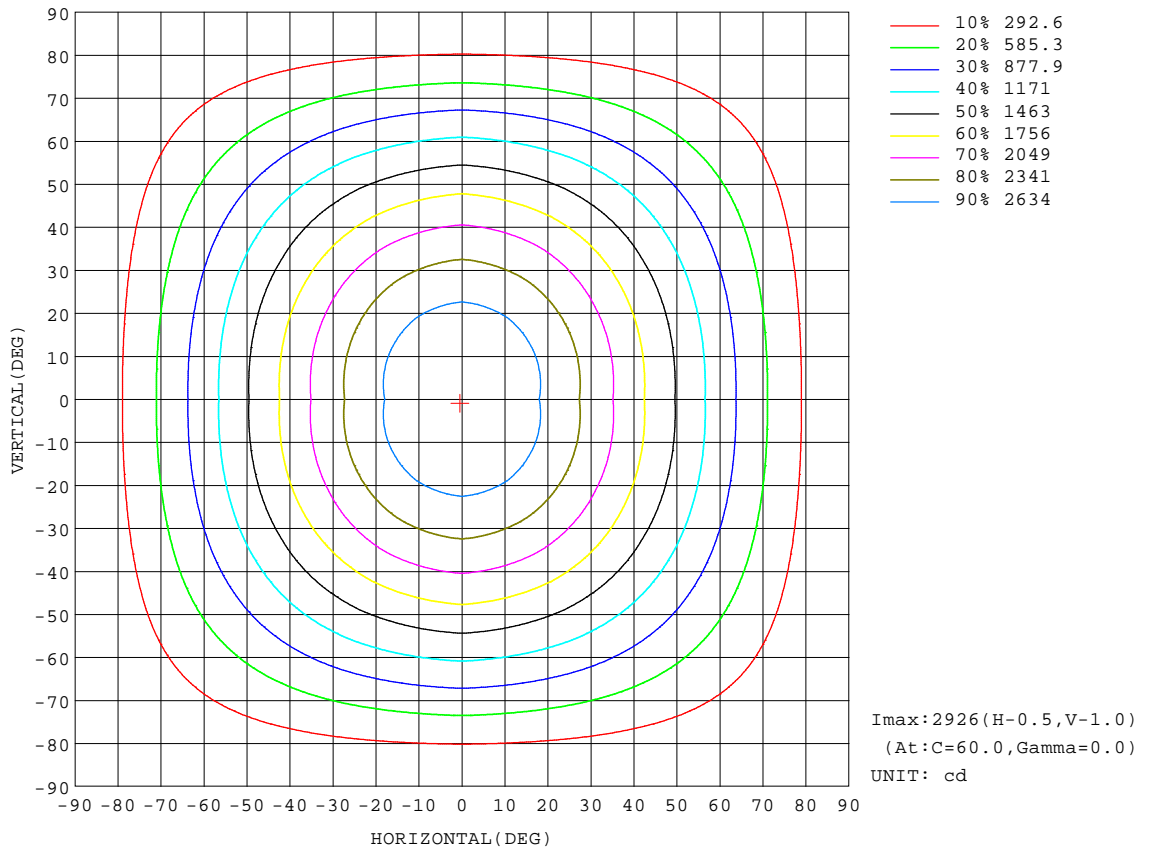


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:230.70V I:0.2670A P:59.700W PF:0.9680 Freq:50.00Hz		
Lamp Flux:7857.31x1 lm		
Name: NS50-2000MM-60W	Type: LED	
MFR.:	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

Flux out:4917 lm

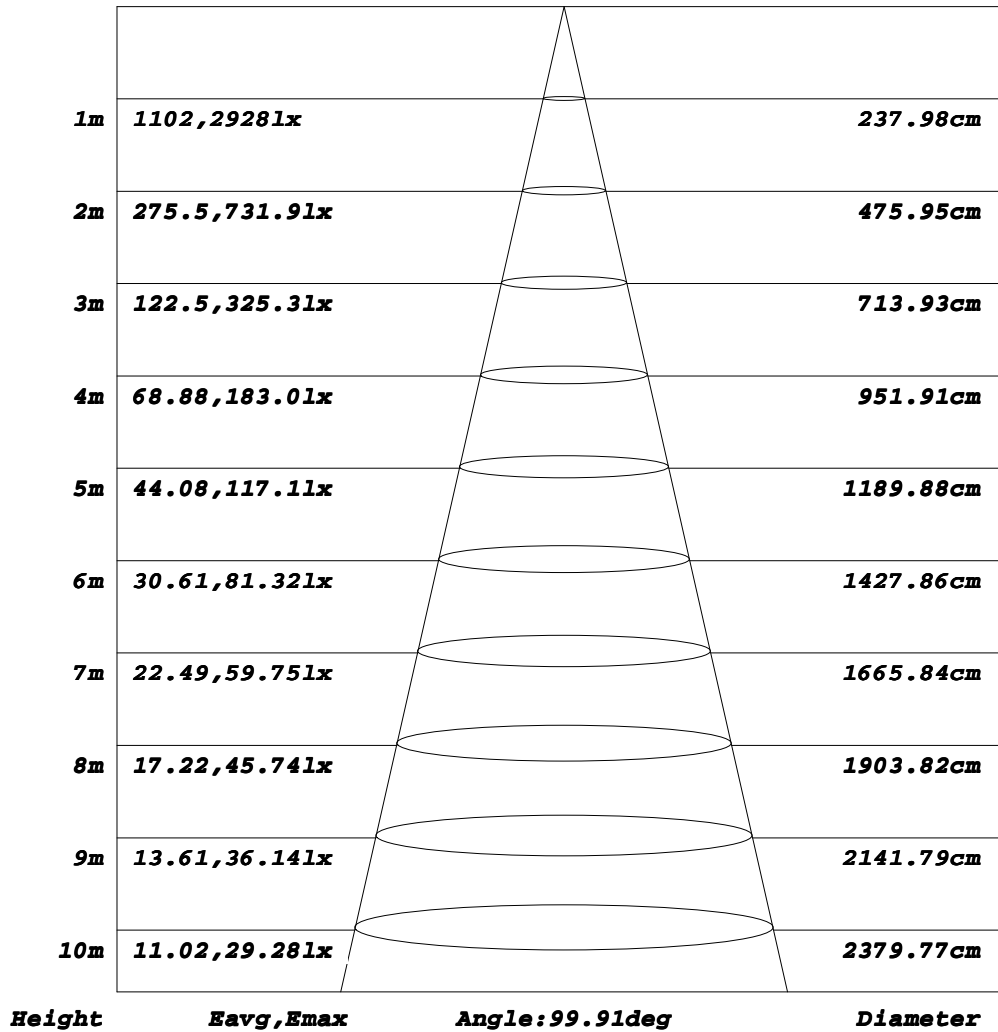


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:230.70V I:0.2670A P:59.700W PF:0.9680 Freq:50.00Hz		
Lamp Flux:7857.31x1 lm		
Name: NS50-2000MM-60W	Type: LED	
MFR.:	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

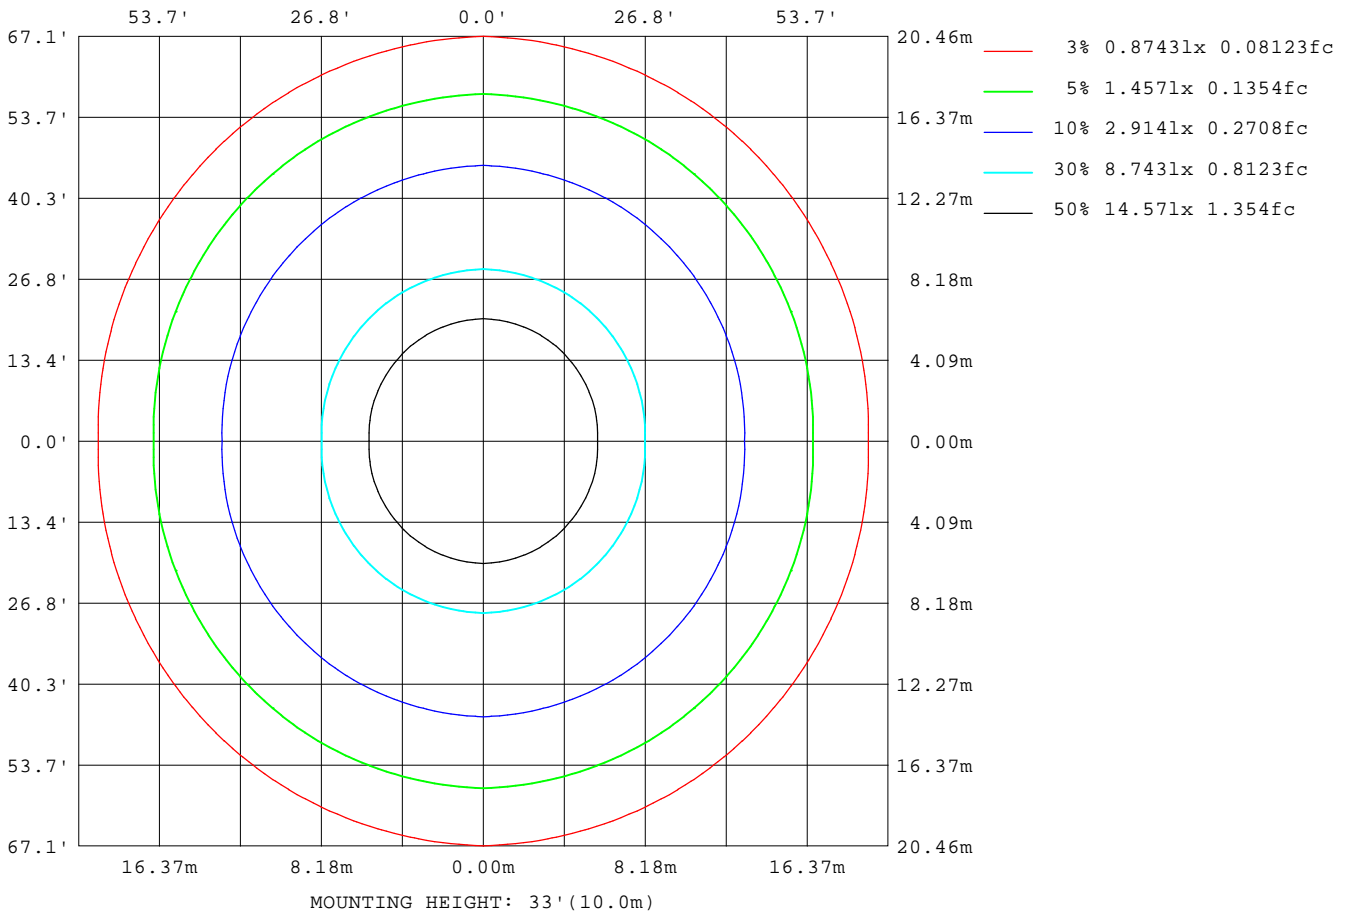

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

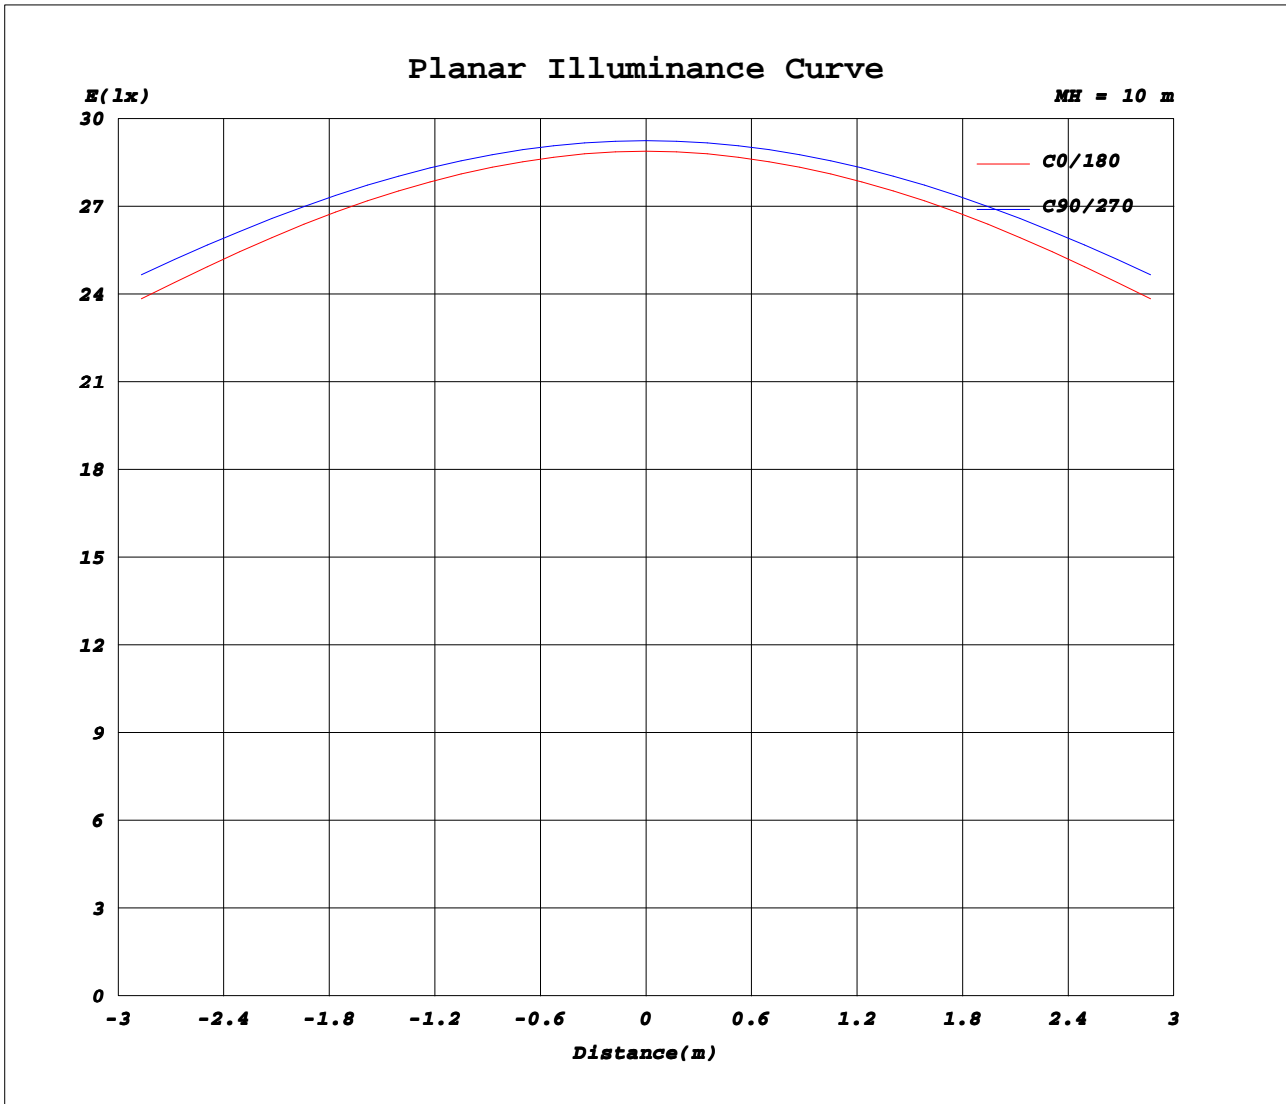

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.70V I:0.2670A P:59.700W PF:0.9680 Freq:50.00Hz		
Lamp Flux:7857.31lx1 lm		
Name: NS50-2000MM-60W	Type: LED	
MFR.:	DIM.: 2000*50*75mm	
	SUR.: 1995*45mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	2889	2915	2928	2925	2928	2915	2889	2915	2928	2925	2928	2915							
5	2867	2895	2911	2910	2911	2895	2867	2895	2911	2910	2911	2895							
10	2807	2839	2861	2867	2861	2839	2807	2839	2861	2867	2861	2839							
15	2708	2750	2782	2795	2782	2750	2708	2750	2782	2795	2782	2750							
20	2578	2628	2673	2696	2673	2628	2578	2628	2673	2696	2673	2628							
25	2420	2480	2538	2570	2538	2480	2420	2480	2538	2570	2538	2480							
30	2244	2311	2381	2423	2381	2311	2244	2311	2381	2423	2381	2311							
35	2053	2125	2205	2254	2205	2125	2053	2125	2205	2254	2205	2125							
40	1852	1926	2012	2069	2012	1926	1852	1926	2012	2069	2012	1926							
45	1647	1721	1809	1868	1809	1721	1647	1721	1809	1868	1809	1721							
50	1444	1511	1598	1661	1598	1511	1444	1511	1598	1661	1598	1511							
55	1235	1298	1379	1438	1379	1298	1235	1298	1379	1438	1379	1298							
60	1029	1085	1158	1212	1158	1085	1029	1085	1158	1212	1158	1085							
65	826	874	936	981	936	874	826	874	936	981	936	874							
70	627	665	713	748	713	665	627	665	713	748	713	665							
75	436	462	494	518	494	462	436	462	494	518	494	462							
80	258	274	290	301	290	274	258	274	290	301	290	274							
85	106	112	117	121	117	112	106	112	117	121	117	112							
90	21.4	22.3	22.9	23.6	22.9	22.3	21.4	22.3	22.9	23.6	22.9	22.3							
95	18.0	18.9	19.8	20.4	19.8	18.9	18.0	18.9	19.8	20.4	19.8	18.9							
100	20.0	20.8	21.6	22.3	21.6	20.8	20.0	20.8	21.6	22.3	21.6	20.8							
105	22.2	23.0	23.8	24.4	23.8	23.0	22.2	23.0	23.8	24.4	23.8	23.0							
110	24.7	25.4	26.0	26.5	26.0	25.4	24.7	25.4	26.0	26.5	26.0	25.4							
115	27.3	27.9	28.3	28.5	28.3	27.9	27.3	27.9	28.3	28.5	28.3	27.9							
120	30.1	30.5	30.6	30.7	30.6	30.5	30.1	30.5	30.6	30.7	30.6	30.5							
125	32.9	33.1	33.1	33.0	33.1	33.1	32.9	33.1	33.1	33.0	33.1	33.1							
130	35.8	35.7	35.7	35.7	35.7	35.7	35.8	35.7	35.7	35.7	35.7	35.7							
135	38.5	38.4	38.5	38.7	38.5	38.4	38.5	38.4	38.5	38.7	38.5	38.4							
140	41.2	41.1	41.5	42.0	41.5	41.1	41.2	41.1	41.5	42.0	41.5	41.1							
145	43.7	43.7	44.3	45.1	44.3	43.7	43.7	43.7	44.3	45.1	44.3	43.7							
150	46.2	46.2	47.1	48.1	47.1	46.2	46.2	46.2	47.1	48.1	47.1	46.2							
155	48.7	48.8	49.8	50.9	49.8	48.8	48.7	48.8	49.8	50.9	49.8	48.8							
160	51.2	51.3	52.3	53.3	52.3	51.3	51.2	51.3	52.3	53.3	52.3	51.3							
165	53.6	53.6	54.5	55.4	54.5	53.6	53.6	53.6	54.5	55.4	54.5	53.6							
170	55.5	55.5	56.2	57.0	56.2	55.5	55.5	55.5	56.2	57.0	56.2	55.5							
175	56.3	56.6	57.4	58.0	57.4	56.6	56.3	56.6	57.4	58.0	57.4	56.6							
180	56.0	56.7	57.6	58.2	57.6	56.7	56.0	56.7	57.6	58.2	57.6	56.7							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: