
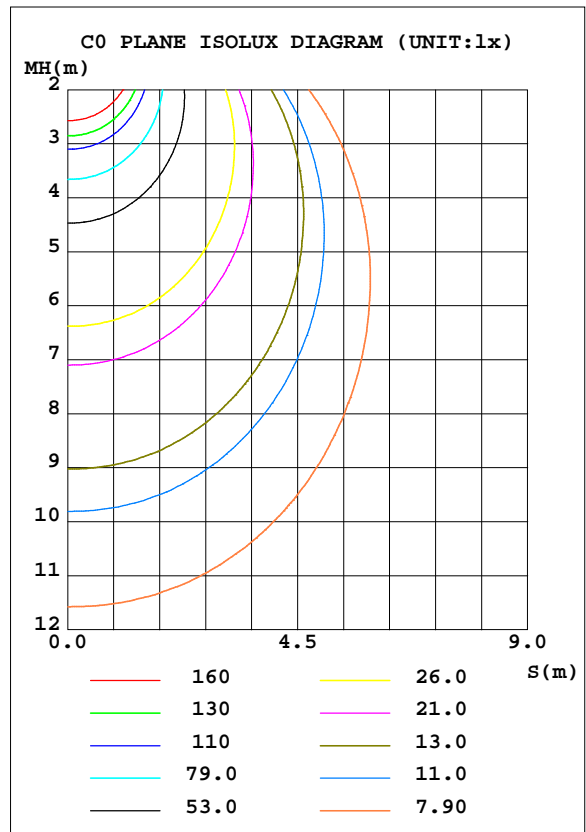


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.80V I:0.1380A P:28.900W PF:0.9380 Freq:50.00Hz		
Lamp Flux:4086.46x1 lm		
Name: NS57-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: L1255*W32*H43mm	
	SUR.: 1190*32mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 141.40 lm/W			
MODEL		I _{max} (cd)	1059	S/MH(C0/180)	1.30
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	4086.5	η UP, DN(C0-180)	7.6,41.7
NOMINAL FLUX(lm)	4086.46	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	7.8,42.8
LAMPS INSIDE	1	η up(%)	15.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	221	η down(%)	84.6	CIBSE SHR MAX	1.35

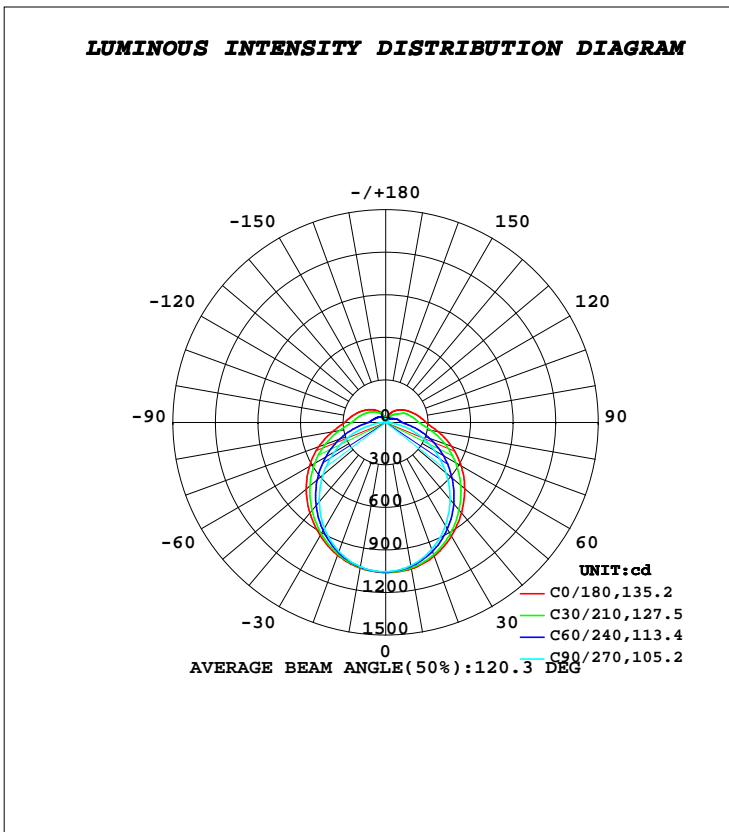

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp	
10	1048	1036	1024	1027	1043	1037	1033	1040	0- 10	99.75	99.75	2.44,2.44	
20	1003	979.4	952.7	967.7	995.9	982.4	967.4	990.2	10- 20	285.7	385.4	9.43,9.43	
30	927.2	889.1	842.3	879.1	922.5	895.5	864.0	906.2	20- 30	432.8	818.2	20,20	
40	832.1	776.4	706.8	770.1	832.5	786.1	730.5	797.8	30- 40	524.5	1343	32.9,32.9	
50	728.1	651.4	556.3	650.4	733.5	665.0	579.5	677.3	40- 50	555.7	1898	46.5,46.5	
60	615.5	520.9	397.5	523.9	621.8	533.9	418.7	546.7	50- 60	529.5	2428	59.4,59.4	
70	496.2	387.6	239.3	394.4	504.1	401.1	258.1	414.8	60- 70	454.1	2882	70.5,70.5	
80	374.0	261.8	93.09	270.4	382.9	272.9	104.5	287.0	70- 80	343.5	3226	78.9,78.9	
90	285.3	176.6	10.69	187.1	290.5	182.4	13.81	194.3	80- 90	229.8	3455	84.6,84.6	
100	242.0	147.1	11.16	156.4	246.8	150.9	12.29	148.9	90-100	171.7	3627	88.8,88.8	
110	203.5	122.0	11.69	131.5	207.7	126.8	13.16	132.0	100-110	140.3	3767	92.2,92.2	
120	170.0	93.26	13.58	110.9	173.2	107.2	14.99	105.8	110-120	110.5	3878	94.9,94.9	
130	139.3	68.81	15.59	92.70	142.3	90.08	16.91	78.95	120-130	81.16	3959	96.9,96.9	
140	111.6	51.93	17.82	76.08	114.1	74.02	18.98	60.36	130-140	56.92	4016	98.3,98.3	
150	79.91	42.31	20.04	59.06	87.28	58.00	21.01	46.98	140-150	36.98	4053	99.2,99.2	
160	54.79	35.04	21.93	43.28	60.56	42.99	22.67	36.51	150-160	21.26	4074	99.7,99.7	
170	29.30	29.47	23.48	30.89	30.58	30.92	23.85	29.57	160-170	9.798	4084	99.9,99.9	
180	23.70	24.05	24.30	24.16	23.71	24.03	24.35	24.19	170-180	2.581	4086	100,100	
DEG	LUMINOUS INTENSITY:cd									UNIT:lm			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.80V I:0.1380A P:28.900W PF:0.9380 Freq:50.00Hz		
Lamp Flux:4086.46x1 lm		
Name: NS57-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: L1255*W32*H43mm	
	SUR.: 1190*32mm	

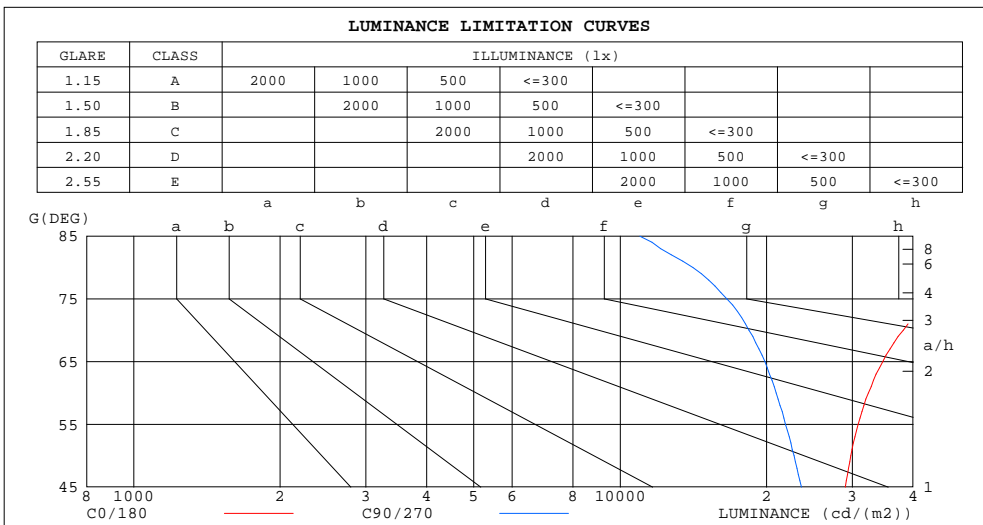

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	97010	10978
80	56676	14108
75	44140	16564
70	38177	18410
65	34656	19837
60	32395	20923
55	30826	21872
50	29808	22773
45	29029	23576


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.80V I:0.1380A P:28.900W PF:0.9380 Freq:50.00Hz		
Lamp Flux:4086.46x1 lm		
Name: NS57-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: L1255*W32*H43mm	
	SUR.: 1190*32mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.15	1.15	1.15	1.11	1.11	1.11	1.03	1.03	1.03	.95	.95	.95	.88	.88	.88	.85
1.0	.98	.93	.88	.94	.89	.85	.87	.83	.80	.80	.77	.75	.74	.72	.70	.66
2.0	.84	.77	.70	.81	.74	.68	.75	.69	.64	.69	.65	.61	.64	.60	.57	.54
3.0	.73	.65	.58	.70	.63	.56	.65	.59	.53	.60	.55	.50	.56	.51	.48	.45
4.0	.65	.55	.48	.62	.54	.47	.58	.51	.45	.53	.47	.43	.50	.45	.40	.38
5.0	.57	.48	.41	.55	.47	.40	.51	.44	.39	.48	.42	.37	.44	.39	.35	.32
6.0	.52	.42	.36	.50	.41	.35	.46	.39	.34	.43	.37	.32	.40	.35	.31	.28
7.0	.47	.38	.31	.45	.37	.31	.42	.35	.29	.39	.33	.28	.37	.31	.27	.25
8.0	.42	.34	.28	.41	.33	.27	.38	.31	.26	.36	.30	.25	.34	.28	.24	.22
9.0	.39	.31	.25	.38	.30	.24	.35	.28	.24	.33	.27	.23	.31	.26	.22	.20
10.0	.36	.28	.22	.35	.27	.22	.33	.26	.21	.31	.25	.20	.29	.24	.20	.18

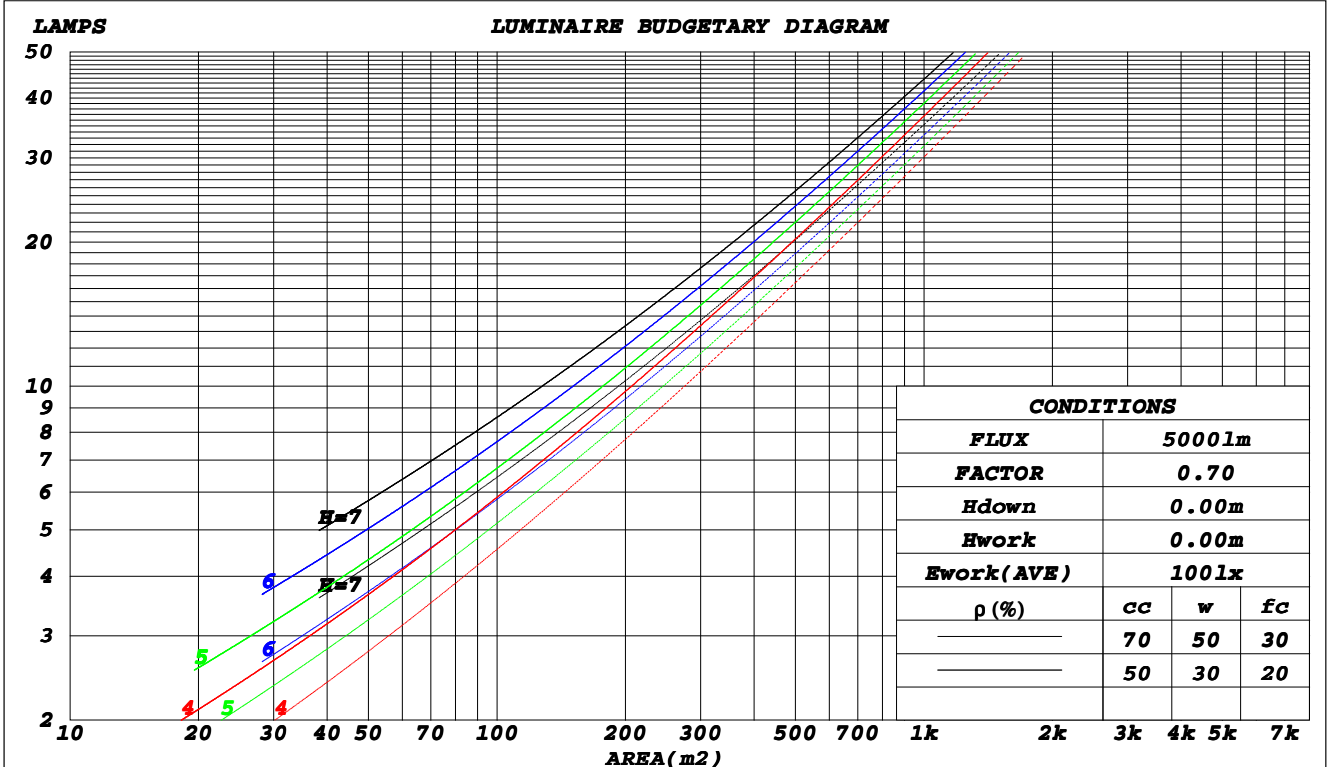

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.80V I:0.1380A P:28.900W PF:0.9380 Freq:50.00Hz		
Lamp Flux:4086.46x1 lm		
Name: NS57-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: L1255*W32*H43mm	
	SUR.: 1190*32mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.358	.204	.065	.346	.197	.063	.324	.186	.059	.304	.175	.056	.285	.165	.053	
2.0	.317	.174	.053	.306	.169	.052	.286	.159	.049	.268	.150	.047	.251	.142	.045	
3.0	.285	.152	.045	.275	.147	.044	.257	.139	.042	.241	.132	.040	.225	.125	.039	
4.0	.258	.134	.039	.250	.131	.039	.233	.124	.037	.218	.117	.035	.204	.111	.034	
5.0	.236	.120	.035	.228	.117	.034	.214	.111	.033	.200	.105	.031	.187	.100	.030	
6.0	.217	.109	.031	.210	.106	.031	.197	.101	.029	.184	.096	.028	.172	.091	.027	
7.0	.201	.099	.028	.195	.097	.028	.182	.092	.027	.171	.087	.025	.160	.083	.024	
8.0	.187	.091	.026	.181	.089	.025	.170	.085	.024	.159	.081	.023	.149	.077	.022	
9.0	.175	.084	.024	.169	.082	.023	.159	.078	.022	.149	.075	.021	.140	.071	.020	
10.0	.164	.078	.022	.159	.077	.021	.149	.073	.021	.140	.069	.020	.131	.066	.019	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.308	.308	.308	.263	.263	.263	.180	.180	.180	.103	.103	.103	.033	.033	.033	
1.0	.302	.274	.249	.259	.235	.214	.177	.162	.148	.102	.094	.086	.033	.030	.028	
2.0	.295	.251	.214	.253	.216	.185	.173	.150	.129	.100	.087	.076	.032	.028	.025	
3.0	.287	.234	.192	.246	.202	.167	.169	.141	.117	.098	.082	.069	.031	.027	.023	
4.0	.280	.222	.178	.240	.192	.154	.165	.134	.109	.095	.078	.064	.031	.025	.021	
5.0	.272	.212	.167	.234	.183	.146	.161	.128	.103	.093	.075	.061	.030	.025	.020	
6.0	.265	.204	.160	.228	.177	.139	.157	.124	.099	.091	.073	.059	.029	.024	.019	
7.0	.258	.197	.155	.222	.171	.135	.153	.120	.095	.089	.071	.057	.029	.023	.019	
8.0	.251	.192	.150	.216	.166	.131	.150	.117	.093	.087	.069	.055	.028	.023	.018	
9.0	.245	.187	.147	.211	.162	.128	.146	.114	.091	.085	.067	.054	.028	.022	.018	
10.0	.239	.183	.145	.206	.159	.126	.143	.112	.090	.084	.066	.054	.027	.022	.018	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.80V I:0.1380A P:28.900W PF:0.9380 Freq:50.00Hz		
Lamp Flux:4086.46x1 lm		
Name: NS57-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: L1255*W32*H43mm	
	SUR.: 1190*32mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.0	25.4	24.5	25.9	26.4	22.4	23.8	22.9	24.2	24.7
3H	26.4	27.6	26.9	28.1	28.7	23.8	25.1	24.3	25.6	26.1
4H	27.6	28.8	28.1	29.3	29.9	24.4	25.6	24.9	26.1	26.7
6H	28.9	30.0	29.4	30.6	31.1	24.8	25.9	25.3	26.4	27.0
8H	29.6	30.7	30.2	31.2	31.8	24.9	25.9	25.4	26.5	27.1
12H	30.4	31.5	31.0	32.0	32.7	24.9	26.0	25.5	26.5	27.1
4H 2H	24.6	25.8	25.1	26.3	26.8	23.3	24.5	23.9	25.0	25.6
3H	27.1	28.2	27.7	28.7	29.3	25.0	26.1	25.6	26.6	27.2
4H	28.5	29.5	29.1	30.1	30.7	25.7	26.7	26.3	27.3	27.9
6H	30.0	30.9	30.6	31.5	32.2	26.3	27.1	26.9	27.7	28.4
8H	30.9	31.7	31.5	32.3	33.0	26.5	27.3	27.1	27.9	28.6
12H	31.8	32.6	32.5	33.2	33.9	26.6	27.3	27.2	28.0	28.7
8H 4H	28.8	29.6	29.4	30.2	30.9	26.5	27.3	27.1	27.9	28.6
6H	30.6	31.3	31.3	31.9	32.7	27.4	28.0	28.0	28.7	29.4
8H	31.6	32.2	32.3	32.9	33.7	27.7	28.3	28.4	29.0	29.7
12H	32.8	33.4	33.5	34.0	34.8	28.0	28.5	28.7	29.2	30.0
12H 4H	28.8	29.5	29.5	30.2	30.9	26.7	27.5	27.4	28.1	28.8
6H	30.7	31.3	31.4	32.0	32.7	27.8	28.4	28.4	29.0	29.8
8H	31.8	32.3	32.5	33.0	33.8	28.2	28.8	28.9	29.5	30.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 4086 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.9)
 Area: 0.038 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.80V I:0.1380A P:28.900W PF:0.9380 Freq:50.00Hz Lamp Flux:4086.46x1 lm		
Name: NS57-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: L1255*W32*H43mm	
	SUR.: 1190*32mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	50	38	31	49	38	31	47	37	30	24
0.80	60	47	39	58	46	39	55	45	38	30
1.00	67	55	47	66	54	47	62	55	45	37
1.25	74	62	54	72	61	54	68	59	52	43
1.50	79	68	60	77	66	59	72	63	57	47
2.00	87	76	69	84	74	67	78	71	64	53
2.50	91	81	74	88	79	72	82	75	69	57
3.00	95	86	79	91	83	77	85	79	73	61
4.00	99	92	86	95	89	83	89	83	79	65
5.00	102	96	90	98	92	88	91	86	82	68
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.80V I:0.1380A P:28.900W PF:0.9380 Freq:50.00Hz		
Lamp Flux:4086.46x1 lm		
Name: NS57-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: L1255*W32*H43mm	
	SUR.: 1190*32mm	

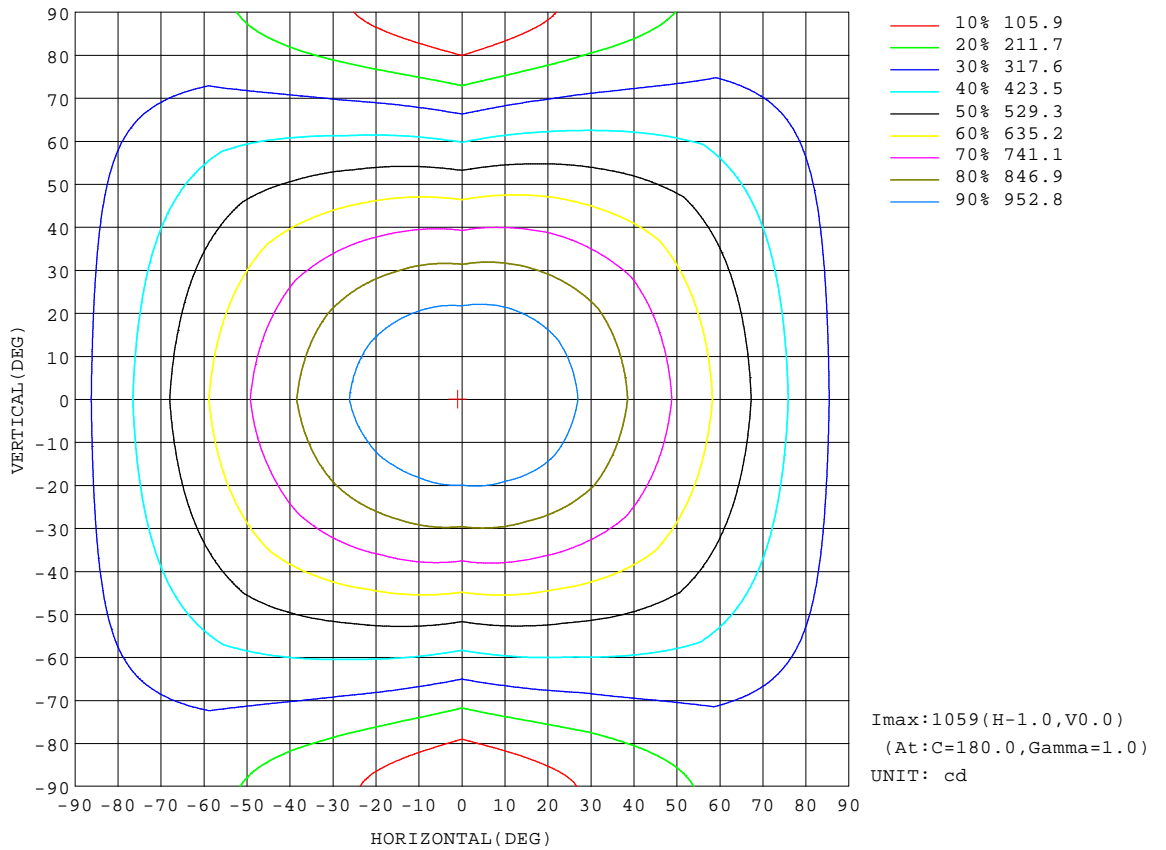


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.80V I:0.1380A P:28.900W PF:0.9380 Freq:50.00Hz		
Lamp Flux:4086.46x1 lm		
Name: NS57-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: L1255*W32*H43mm	
	SUR.: 1190*32mm	

Flux out:2063 lm

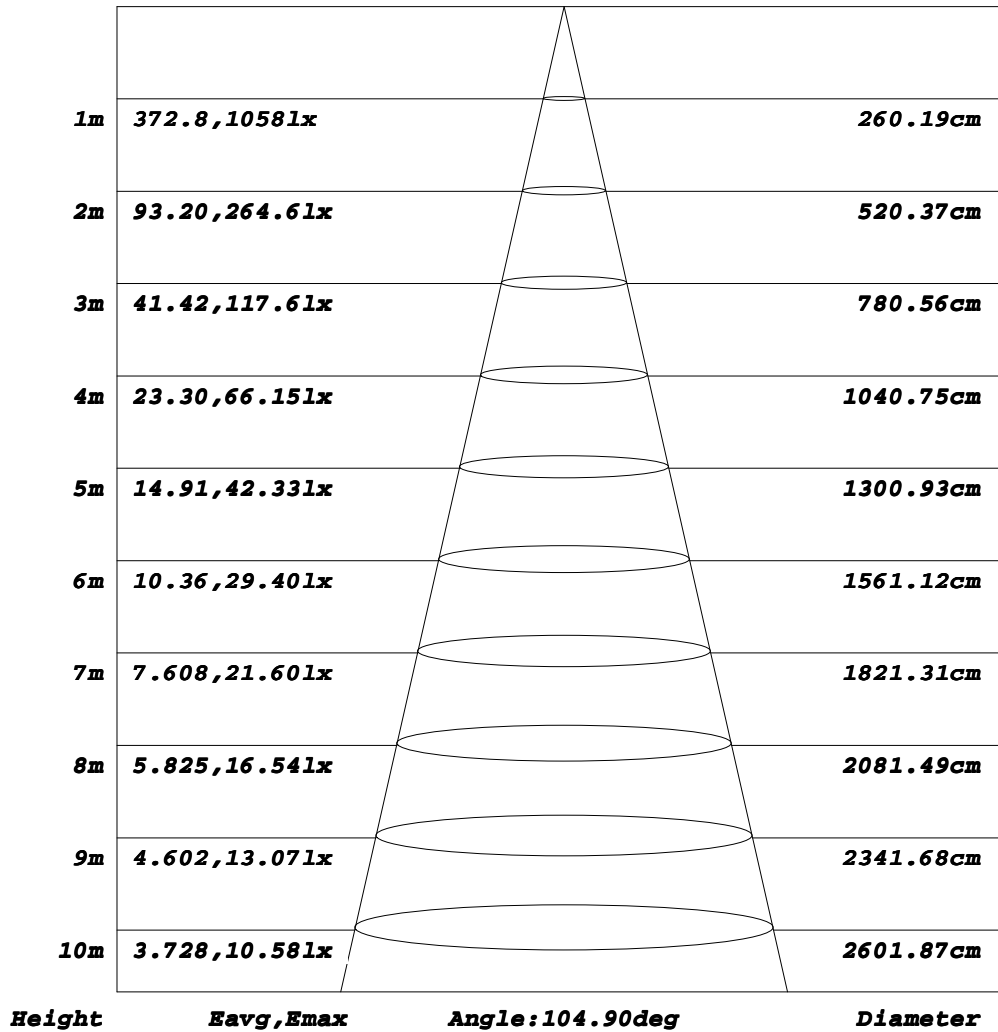


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.80V I:0.1380A P:28.900W PF:0.9380 Freq:50.00Hz		
Lamp Flux:4086.46x1 lm		
Name: NS57-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: L1255*W32*H43mm	
	SUR.: 1190*32mm	

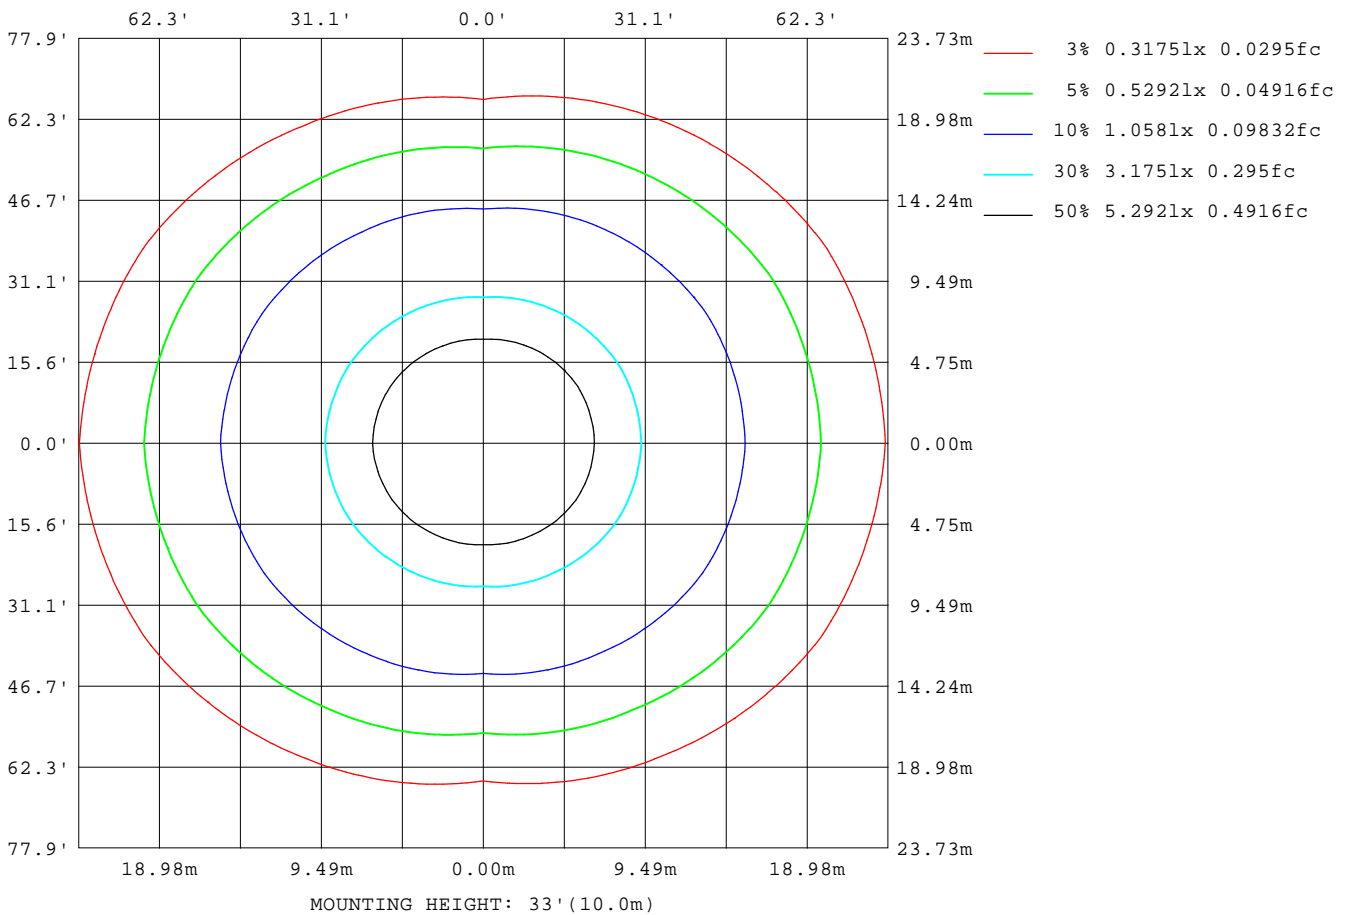

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

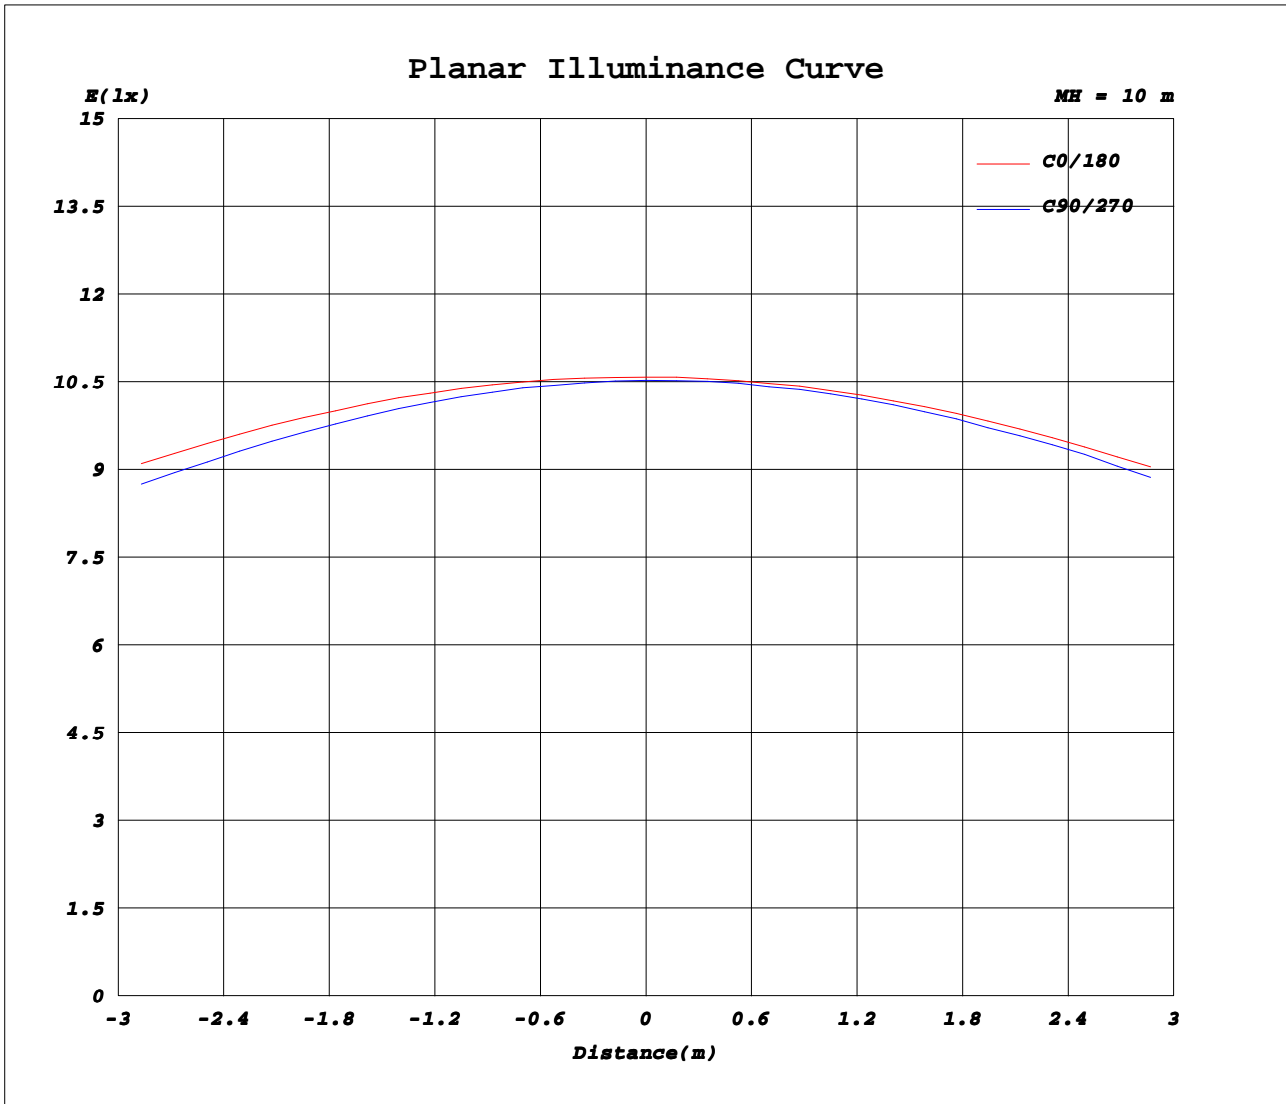

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.80V I:0.1380A P:28.900W PF:0.9380 Freq:50.00Hz Lamp Flux:4086.46x1 lm		
Name: NS57-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: L1255*W32*H43mm	
	SUR.: 1190*32mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1058	1056	1055	1053	1051	1051	1058	1056	1055	1053	1051	1051							
5	1057	1053	1048	1044	1043	1045	1055	1053	1050	1049	1050	1050							
10	1048	1042	1031	1024	1025	1029	1043	1039	1035	1033	1039	1041							
15	1030	1021	1004	993	996	1006	1023	1017	1011	1005	1015	1025							
20	1003	991	968	953	959	976	996	988	977	967	983	998							
25	968	953	922	902	914	940	962	952	933	920	942	962							
30	927	909	869	842	863	896	923	909	882	864	893	919							
35	880	859	811	778	805	848	878	861	826	800	837	871							
40	832	805	748	707	743	797	833	809	763	731	776	819							
45	780	749	680	633	678	744	784	755	699	657	712	764							
50	728	691	612	556	613	688	734	698	632	580	646	709							
55	672	631	542	477	545	630	678	639	561	500	575	650							
60	616	570	471	398	476	571	622	579	489	419	504	589							
65	557	509	401	319	408	511	564	518	418	339	433	529							
70	496	445	331	239	340	449	504	455	347	258	363	466							
75	434	383	263	163	274	387	442	392	278	178	295	404							
80	374	324	200	93.1	212	329	383	331	214	104	231	343							
85	321	271	148	36.4	161	277	329	278	159	44.6	176	289							
90	285	236	118	10.7	131	243	291	242	123	13.8	139	249							
95	263	216	105	10.8	118	224	268	222	109	12.3	114	219							
100	242	199	95.3	11.2	107	206	247	203	98.6	12.3	99.6	198							
105	222	183	87.2	11.4	97.8	189	226	186	90.0	12.5	101	184							
110	204	168	76.5	11.7	90.2	173	208	171	82.8	13.2	89.3	175							
115	186	154	64.8	12.6	82.4	158	190	156	76.7	14.1	77.7	161							
120	170	131	55.7	13.6	76.9	145	173	143	71.5	15.0	68.6	143							
125	154	106	49.9	14.6	71.4	131	157	130	66.5	15.9	60.7	120							
130	139	92.5	45.1	15.6	66.0	119	142	118	61.9	16.9	54.5	103							
135	125	78.7	41.3	16.6	61.0	108	128	107	57.5	17.9	49.5	88.8							
140	112	66.5	37.3	17.8	55.9	96.3	114	95.6	52.5	19.0	44.7	76.0							
145	97.4	57.8	35.4	19.0	49.7	85.2	101	84.9	46.5	20.1	40.1	65.1							
150	79.9	49.9	34.7	20.0	43.7	74.4	87.3	74.2	41.8	21.0	38.2	55.8							
155	62.7	42.4	33.4	21.0	39.2	63.2	74.4	63.3	37.9	21.9	36.1	47.1							
160	54.8	38.4	31.7	21.9	35.0	51.6	60.6	51.7	34.2	22.7	33.6	39.4							
165	35.3	35.5	29.6	22.8	31.2	41.8	46.2	42.3	30.9	23.3	31.0	35.5							
170	29.3	31.5	27.5	23.5	28.0	33.8	30.6	34.0	27.9	23.8	28.3	30.8							
175	25.8	27.2	25.7	24.1	25.7	27.3	25.8	27.7	25.7	24.2	26.0	26.9							
180	23.7	23.9	24.2	24.3	24.3	24.1	23.7	23.9	24.2	24.3	24.4	24.0							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: