
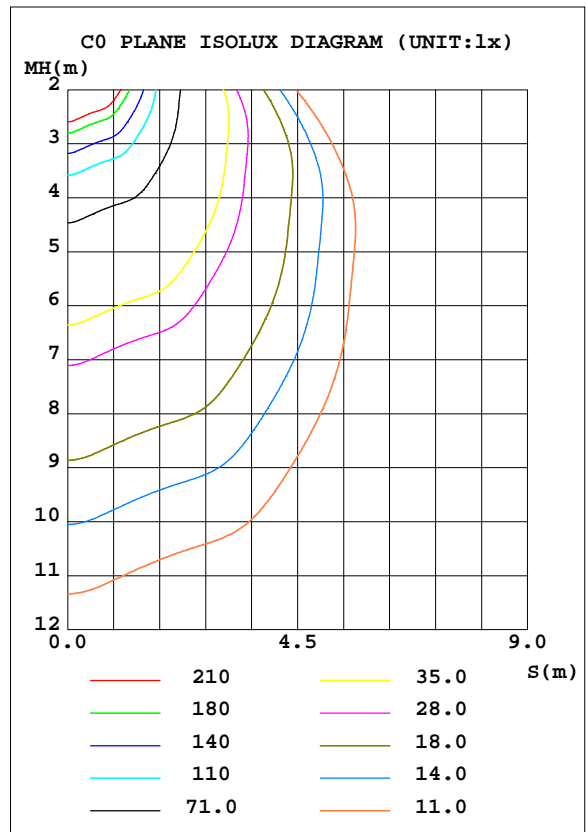


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.1370A P:30.000W PF:0.9830 Freq:50.00Hz		
Lamp Flux:4428.4lx1 lm		
Name: NS59-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: 1200*100*75mm	
	SUR.: 1180*80mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 147.61 lm/W			
MODEL		I _{max} (cd)	1416	S/MH(C0/180)	1.24
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	4428.4	η UP, DN(C0-180)	2.2,47.3
NOMINAL FLUX(lm)	4428.41	CIE CLASS	DIRECT	η UP, DN(C180-360)	2.4,48.0
LAMPS INSIDE	1	η up(%)	4.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	95.3	CIBSE SHR MAX	1.35

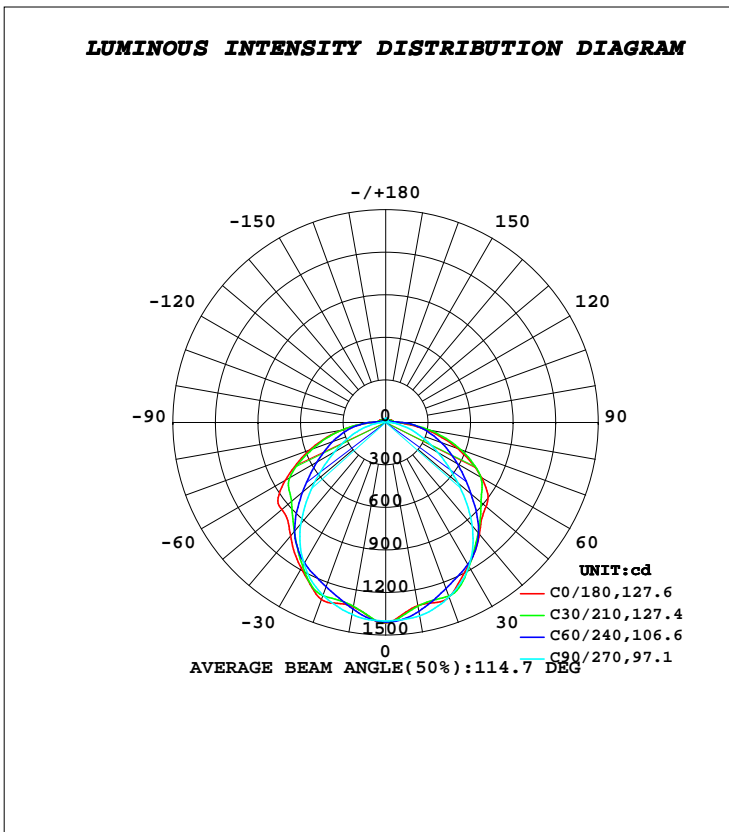

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1312	1334	1384	1313	1320	1326	1374	1338	0- 10	130.1	130.1	2.94,2.94
20	1310	1274	1309	1267	1329	1266	1296	1266	10- 20	369.7	499.8	11.3,11.3
30	1166	1167	1173	1155	1190	1159	1153	1164	20- 30	567.1	1067	24.1,24.1
40	1028	1018	949.0	992.9	1044	1002	930.7	1021	30- 40	680.6	1747	39.5,39.5
50	924.6	833.2	666.3	810.1	956.0	817.7	654.0	843.1	40- 50	700.6	2448	55.3,55.3
60	781.6	680.9	425.1	664.8	818.5	672.4	417.1	686.8	50- 60	660.6	3109	70.2,70.2
70	540.1	491.7	244.6	463.4	572.3	475.3	242.5	506.2	60- 70	550.1	3659	82.6,82.6
80	278.9	292.9	106.5	268.6	313.8	284.6	108.1	316.2	70- 80	378.5	4037	91.2,91.2
90	80.87	111.0	27.72	92.94	94.30	107.5	29.57	131.0	80- 90	184.9	4222	95.3,95.3
100	48.81	44.93	19.04	42.02	52.41	46.28	21.33	50.96	90-100	66.21	4288	96.8,96.8
110	42.36	31.09	16.69	29.54	46.01	32.53	18.78	35.24	100-110	38.65	4327	97.7,97.7
120	32.49	23.03	15.40	22.45	35.53	25.17	17.91	26.44	110-120	27.70	4355	98.3,98.3
130	24.29	19.84	17.56	19.94	26.61	21.96	19.63	22.15	120-130	20.32	4375	98.8,98.8
140	22.97	21.43	20.18	21.66	24.27	23.31	21.90	22.76	130-140	16.69	4392	99.2,99.2
150	24.69	23.62	22.85	23.84	25.62	25.12	24.23	24.52	140-150	14.61	4406	99.5,99.5
160	26.60	25.90	25.48	25.98	27.01	26.74	26.32	26.32	150-160	11.68	4418	99.8,99.8
170	28.69	27.88	27.61	27.80	28.60	28.09	27.90	27.84	160-170	7.677	4426	99.9,99.9
180	29.43	28.66	28.56	28.44	29.54	28.65	28.52	28.45	170-180	2.708	4428	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.1370A P:30.000W PF:0.9830 Freq:50.00Hz		
Lamp Flux:4428.4lx1 lm		
Name: NS59-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: 1200*100*75mm	
	SUR.: 1180*80mm	

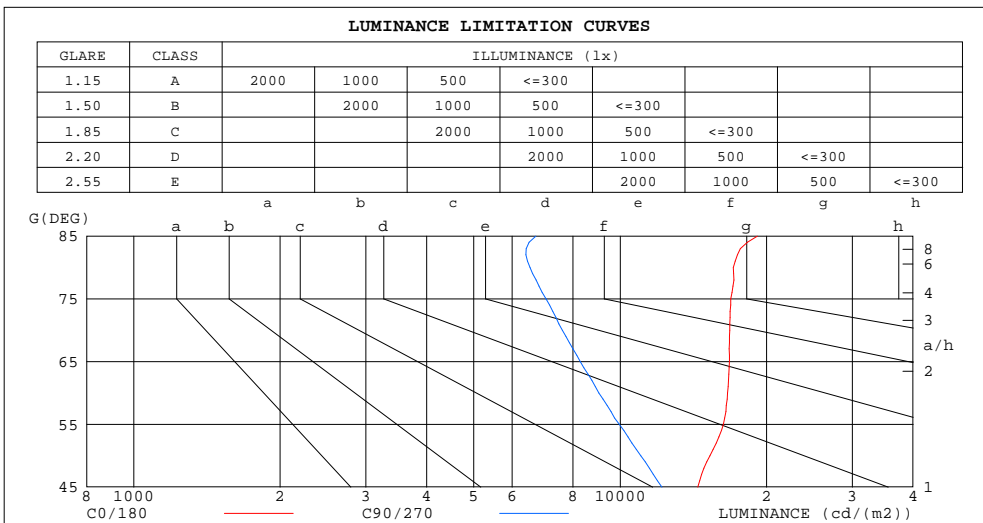

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	19154	6709
80	17087	6527
75	16887	7040
70	16799	7609
65	16767	8275
60	16630	9045
55	16304	9964
50	15303	11028
45	14441	12177


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.1370A P:30.000W PF:0.9830 Freq:50.00Hz		
Lamp Flux:4428.41x1 lm		
Name: NS59-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: 1200*100*75mm	
	SUR.: 1180*80mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio									Coefficients of Utilization(CU)						
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.95
1.0	1.01	.96	.92	.98	.94	.90	.93	.90	.86	.88	.85	.83	.84	.82	.80	.77
2.0	.87	.80	.74	.85	.78	.73	.81	.75	.70	.77	.72	.68	.73	.69	.66	.63
3.0	.76	.68	.61	.74	.66	.60	.71	.64	.58	.67	.61	.57	.64	.59	.55	.53
4.0	.67	.58	.51	.66	.57	.51	.62	.55	.49	.60	.53	.48	.57	.51	.47	.45
5.0	.60	.51	.44	.59	.50	.43	.56	.48	.42	.53	.47	.42	.51	.45	.41	.38
6.0	.54	.45	.38	.53	.44	.38	.50	.43	.37	.48	.41	.36	.46	.40	.36	.33
7.0	.49	.40	.34	.48	.39	.33	.46	.38	.33	.44	.37	.32	.42	.36	.32	.29
8.0	.44	.36	.30	.44	.35	.30	.42	.34	.29	.40	.34	.29	.39	.33	.28	.26
9.0	.41	.32	.27	.40	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.25	.24
10.0	.38	.30	.24	.37	.29	.24	.36	.29	.24	.34	.28	.23	.33	.27	.23	.21

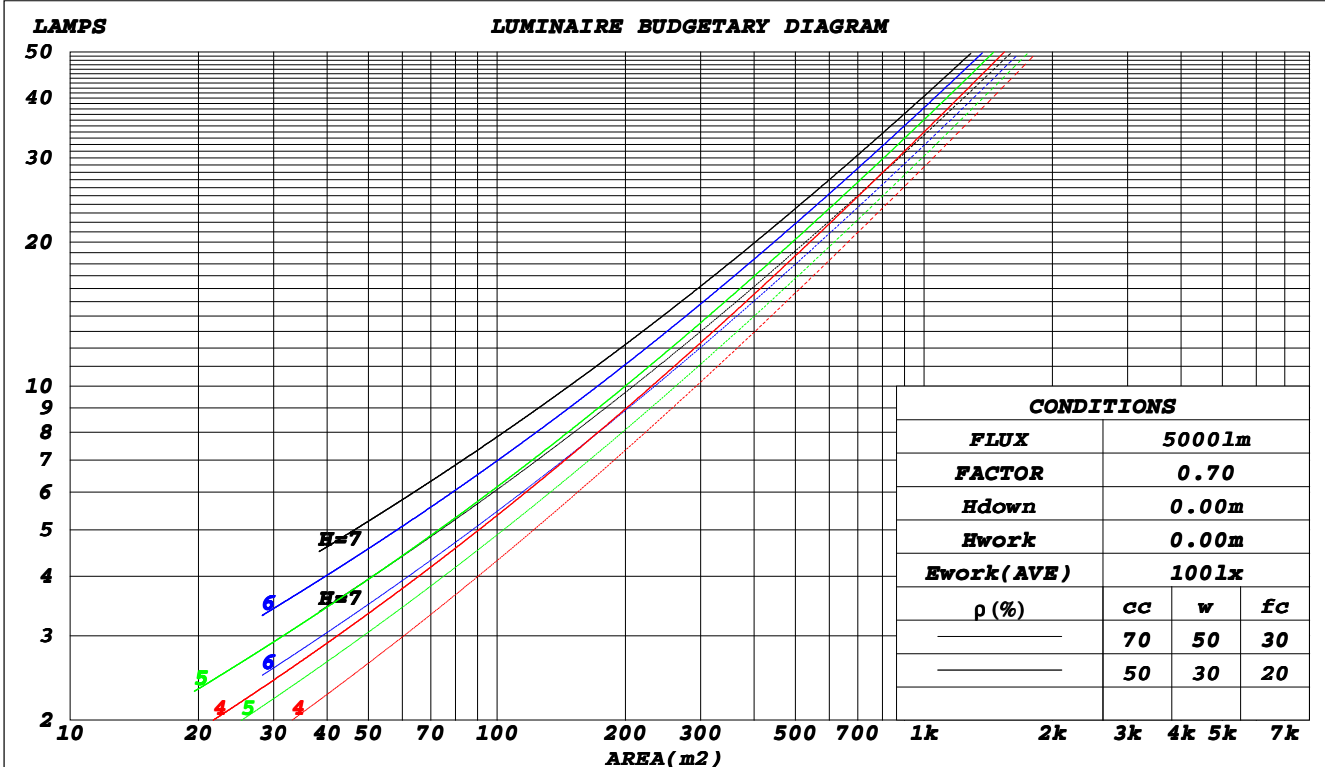

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.1370A P:30.000W PF:0.9830 Freq:50.00Hz		
Lamp Flux:4428.4lx1 lm		
Name: NS59-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: 1200*100*75mm	
	SUR.: 1180*80mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.343	.195	.062	.335	.191	.061	.318	.183	.058	.304	.175	.056	.290	.168	.054	
2.0	.311	.171	.052	.304	.167	.052	.289	.161	.050	.276	.155	.048	.264	.149	.047	
3.0	.283	.150	.045	.276	.148	.044	.263	.143	.043	.251	.138	.042	.240	.133	.041	
4.0	.258	.134	.039	.252	.132	.039	.240	.128	.038	.230	.123	.037	.220	.120	.036	
5.0	.237	.121	.035	.231	.119	.035	.221	.115	.034	.211	.112	.033	.203	.108	.033	
6.0	.218	.109	.031	.213	.108	.031	.204	.105	.030	.196	.102	.030	.188	.099	.029	
7.0	.202	.100	.028	.198	.099	.028	.190	.096	.028	.182	.093	.027	.175	.091	.027	
8.0	.188	.092	.026	.184	.091	.026	.177	.088	.025	.170	.086	.025	.163	.084	.024	
9.0	.176	.085	.024	.172	.084	.024	.166	.082	.023	.159	.080	.023	.153	.078	.022	
10.0	.165	.079	.022	.162	.078	.022	.156	.076	.021	.150	.074	.021	.144	.073	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.226	.226	.226	.193	.193	.193	.132	.132	.132	.076	.076	.076	.024	.024	.024	
1.0	.218	.192	.168	.187	.164	.144	.128	.113	.100	.074	.065	.058	.024	.021	.019	
2.0	.211	.168	.132	.181	.144	.114	.124	.100	.079	.071	.058	.047	.023	.019	.015	
3.0	.203	.151	.109	.174	.130	.094	.120	.090	.066	.069	.053	.039	.022	.017	.013	
4.0	.195	.138	.093	.168	.119	.081	.115	.083	.057	.067	.049	.034	.021	.016	.011	
5.0	.188	.127	.083	.161	.110	.072	.111	.077	.051	.064	.045	.030	.021	.015	.010	
6.0	.180	.119	.075	.155	.103	.065	.107	.072	.046	.062	.042	.027	.020	.014	.009	
7.0	.173	.112	.069	.149	.097	.061	.103	.068	.043	.060	.040	.026	.019	.013	.008	
8.0	.167	.107	.065	.144	.092	.057	.099	.065	.040	.058	.038	.024	.019	.013	.008	
9.0	.161	.102	.062	.138	.088	.054	.096	.062	.038	.056	.037	.023	.018	.012	.008	
10.0	.155	.097	.059	.133	.085	.052	.093	.059	.037	.054	.035	.022	.018	.012	.007	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.1370A P:30.000W PF:0.9830 Freq:50.00Hz		
Lamp Flux:4428.4lx1 lm		
Name: NS59-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: 1200*100*75mm	
	SUR.: 1180*80mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.6	24.1	23.0	24.4	24.7	20.6	22.1	20.9	22.4	22.7
3H	24.6	26.0	25.0	26.3	26.7	21.8	23.2	22.2	23.5	23.9
4H	25.5	26.8	25.9	27.2	27.5	22.3	23.7	22.7	24.0	24.4
6H	26.2	27.5	26.6	27.8	28.2	22.7	24.0	23.1	24.3	24.7
8H	26.5	27.7	26.9	28.1	28.5	22.9	24.1	23.3	24.5	24.8
12H	26.7	27.9	27.2	28.3	28.7	23.0	24.1	23.4	24.5	24.9
4H 2H	23.2	24.5	23.6	24.9	25.2	21.7	23.0	22.1	23.3	23.7
3H	25.5	26.7	25.9	27.0	27.4	23.2	24.4	23.7	24.8	25.2
4H	26.5	27.6	27.0	28.0	28.4	24.0	25.0	24.4	25.4	25.9
6H	27.4	28.4	27.9	28.8	29.3	24.6	25.5	25.0	26.0	26.4
8H	27.8	28.7	28.3	29.1	29.6	24.8	25.7	25.3	26.1	26.6
12H	28.1	28.9	28.6	29.4	29.9	25.0	25.8	25.5	26.3	26.8
8H 4H	26.9	27.7	27.3	28.2	28.7	24.8	25.7	25.2	26.1	26.6
6H	28.0	28.8	28.5	29.3	29.8	25.7	26.5	26.2	27.0	27.5
8H	28.5	29.2	29.1	29.7	30.3	26.2	26.8	26.7	27.3	27.9
12H	29.0	29.6	29.6	30.1	30.7	26.5	27.1	27.1	27.6	28.2
12H 4H	26.9	27.7	27.4	28.2	28.7	24.9	25.7	25.4	26.2	26.7
6H	28.1	28.8	28.7	29.3	29.9	26.0	26.7	26.5	27.2	27.7
8H	28.7	29.3	29.3	29.8	30.4	26.6	27.2	27.1	27.7	28.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117, 4428 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.2)
 Area: 0.094 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.1370A P:30.000W PF:0.9830 Freq:50.00Hz		
Lamp Flux:4428.4lx1 lm		
Name: NS59-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: 1200*100*75mm	
	SUR.: 1180*80mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	55	43	36	54	42	35	52	42	35	29
0.80	64	52	44	63	52	44	61	51	44	36
1.00	72	61	53	71	60	52	68	61	52	44
1.25	79	68	60	78	67	60	74	65	59	51
1.50	84	74	66	82	72	65	79	70	64	56
2.00	91	82	75	89	80	74	85	78	72	63
2.50	95	87	80	93	85	79	89	82	77	67
3.00	99	91	85	96	89	84	92	86	81	71
4.00	103	97	91	100	95	90	95	91	87	76
5.00	106	100	96	103	98	94	98	94	90	79
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNO = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.1370A P:30.000W PF:0.9830 Freq:50.00Hz		
Lamp Flux:4428.4lx1 lm		
Name: NS59-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: 1200*100*75mm	
	SUR.: 1180*80mm	

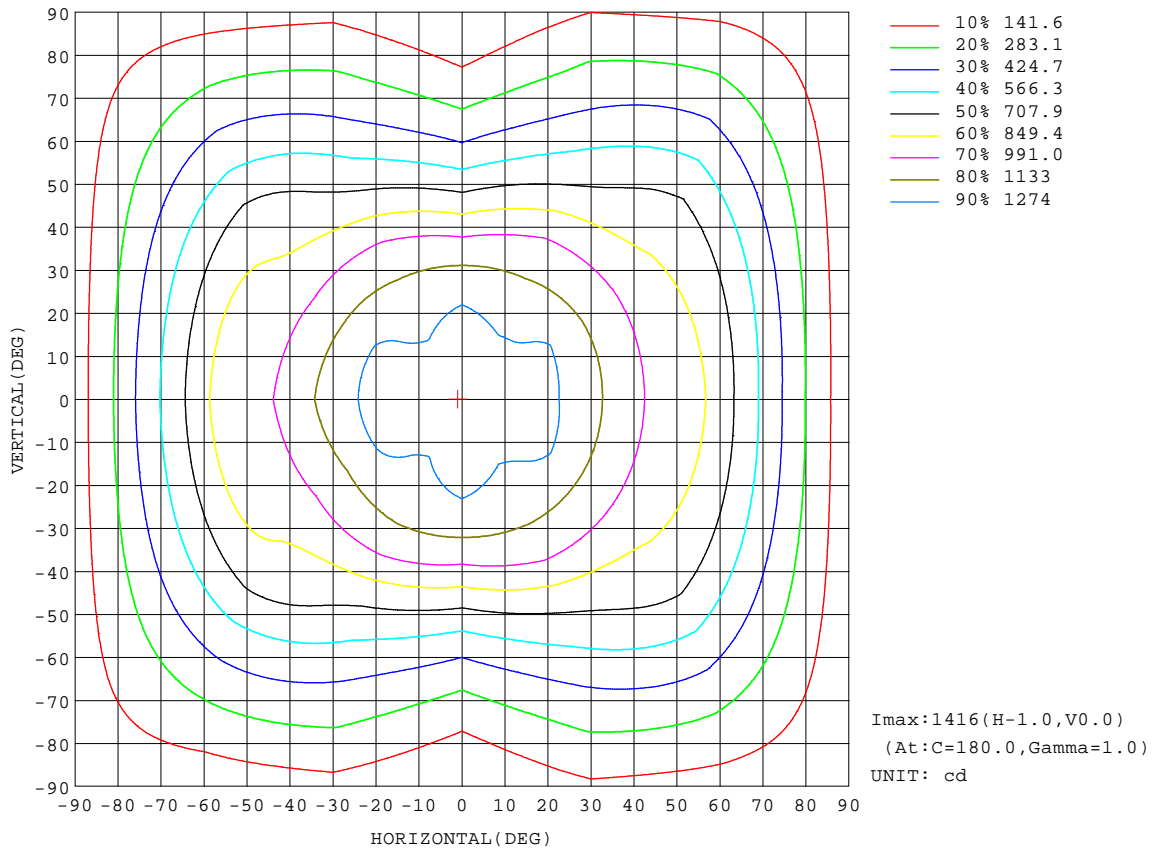


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.1370A P:30.000W PF:0.9830 Freq:50.00Hz		
Lamp Flux:4428.4lx1 lm		
Name: NS59-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: 1200*100*75mm	
	SUR.: 1180*80mm	

Flux out:2379 lm

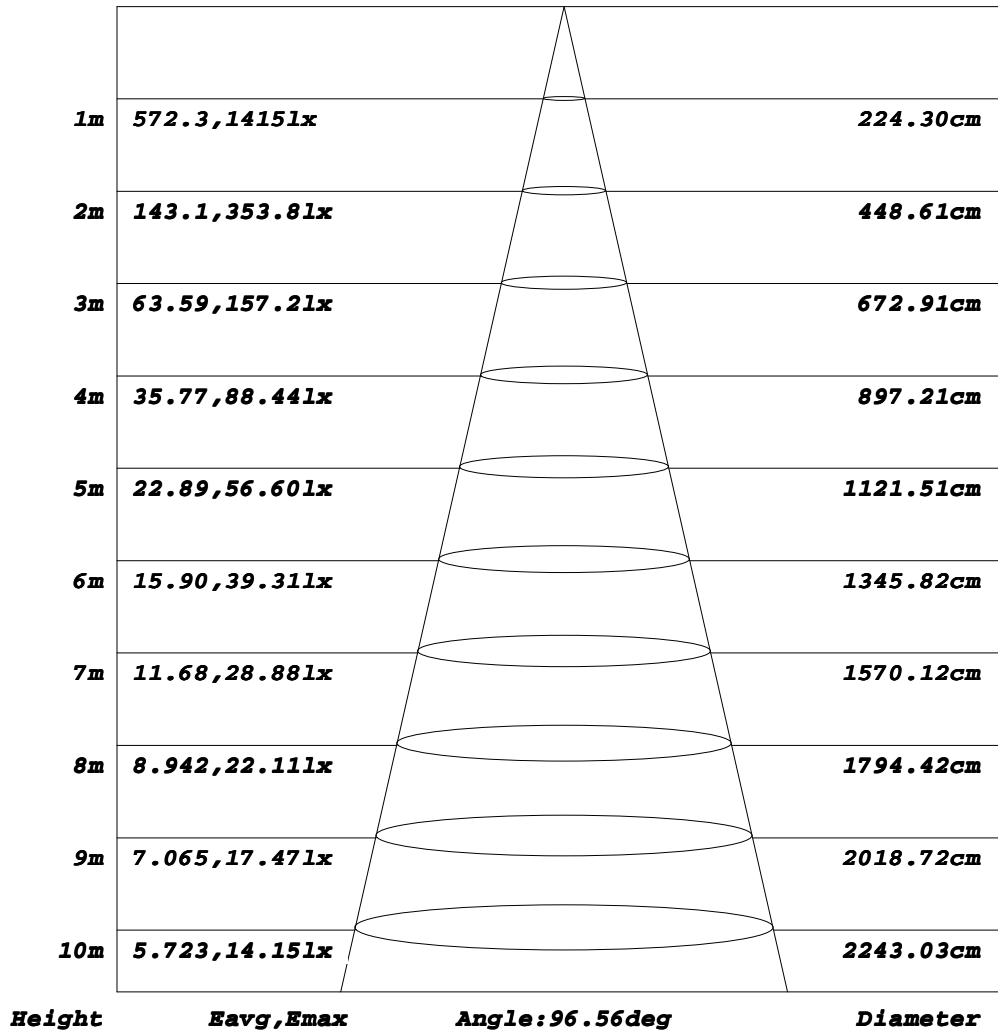


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.1370A P:30.000W PF:0.9830 Freq:50.00Hz		
Lamp Flux:4428.4lx1 lm		
Name: NS59-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: 1200*100*75mm	
	SUR.: 1180*80mm	

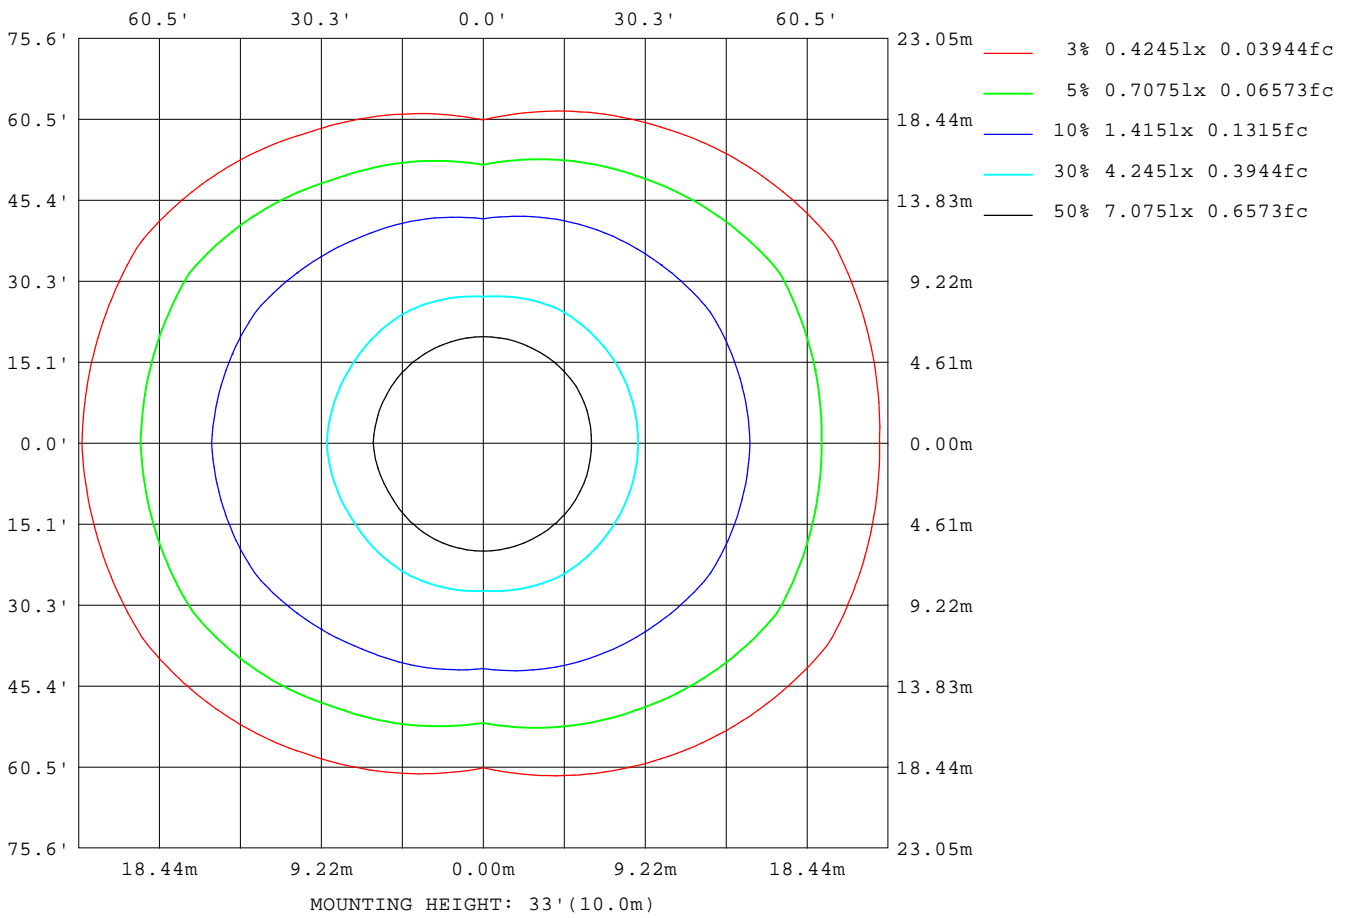

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

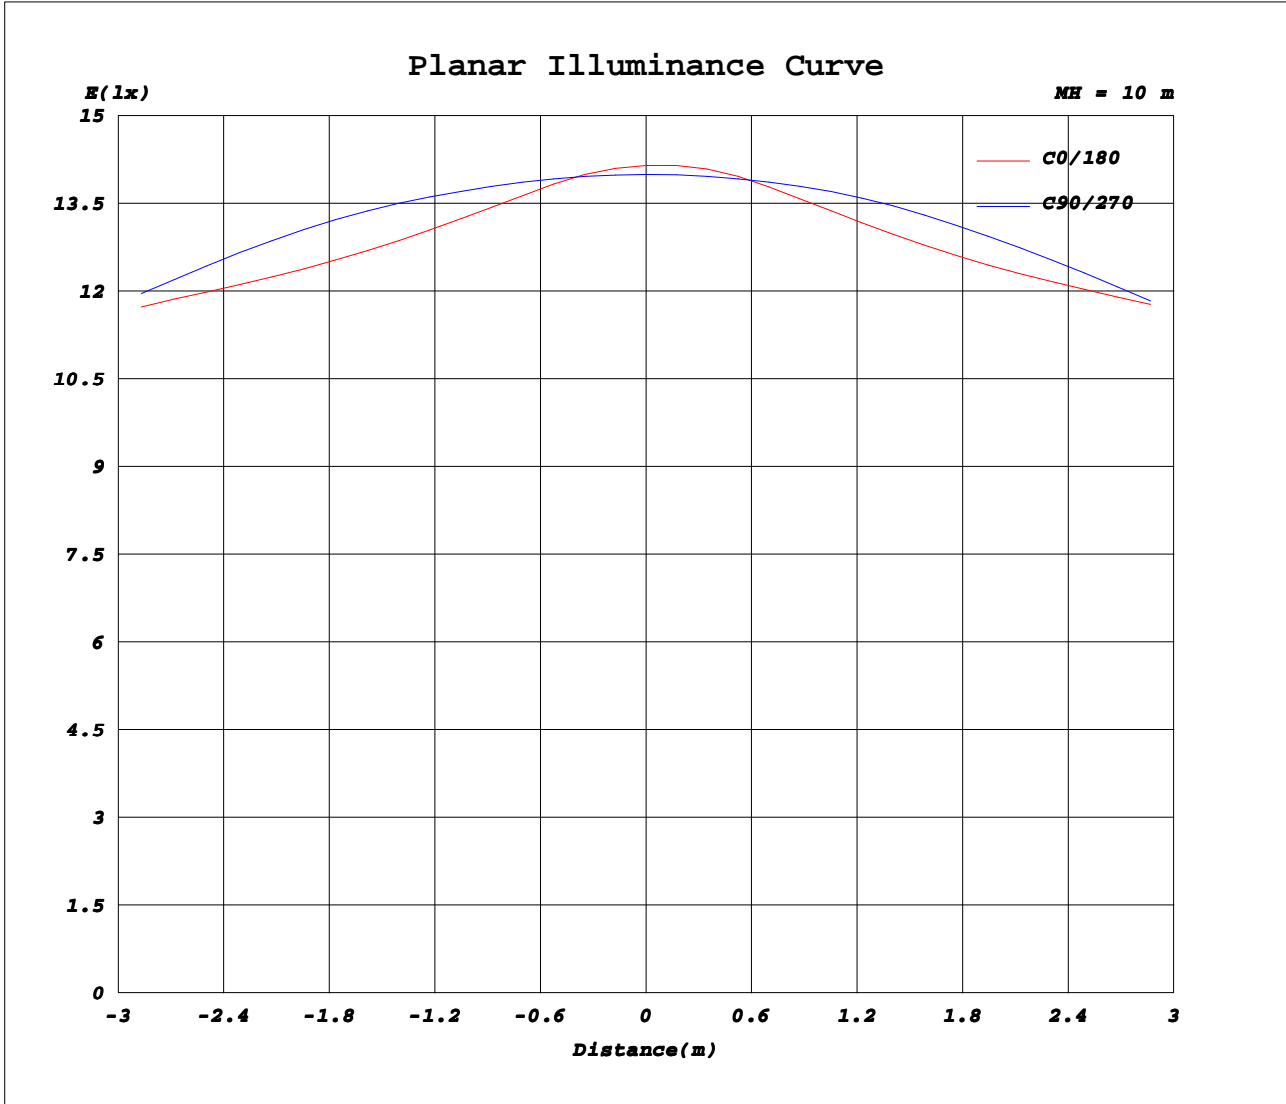

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.1370A P:30.000W PF:0.9830 Freq:50.00Hz Lamp Flux:4428.4lx1 lm		
Name: NS59-1200MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: 1200*100*75mm	
	SUR.: 1180*80mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1415	1411	1408	1400	1397	1401	1415	1411	1408	1400	1397	1401							
5	1359	1369	1394	1395	1364	1350	1374	1371	1386	1395	1399	1375							
10	1312	1315	1352	1384	1321	1304	1320	1316	1336	1374	1362	1315							
15	1317	1298	1299	1354	1277	1296	1321	1297	1281	1340	1300	1288							
20	1310	1302	1246	1309	1236	1298	1329	1299	1232	1296	1242	1290							
25	1236	1260	1200	1250	1200	1238	1260	1256	1189	1235	1192	1263							
30	1166	1176	1159	1173	1159	1151	1190	1172	1145	1153	1146	1181							
35	1102	1092	1102	1072	1093	1067	1122	1084	1085	1053	1091	1100							
40	1028	1017	1020	949	996	990	1044	1004	1000	931	1017	1024							
45	960	946	907	809	872	920	979	930	888	792	919	954							
50	925	878	788	666	755	865	956	868	767	654	801	885							
55	879	829	680	537	652	836	926	833	657	527	684	832							
60	782	775	587	425	562	768	818	783	562	417	589	785							
65	666	679	500	329	479	646	692	674	475	325	501	700							
70	540	565	418	245	403	524	572	552	399	242	422	590							
75	411	442	341	171	329	404	447	434	326	171	349	473							
80	279	317	269	107	254	283	314	314	255	108	283	350							
85	157	194	195	55.0	176	162	184	191	183	57.8	214	227							
90	80.9	101	121	27.7	101	85.0	94.3	102	113	29.6	140	122							
95	56.1	62.6	65.9	22.0	54.7	57.5	62.4	65.0	63.8	23.9	79.9	71.0							
100	48.8	49.7	40.1	19.0	35.9	48.1	52.4	51.8	40.8	21.3	48.2	53.8							
105	46.1	44.5	29.1	17.6	26.6	43.1	49.0	46.3	30.1	19.9	34.6	48.0							
110	42.4	39.5	22.7	16.7	20.8	38.3	46.0	41.3	23.7	18.8	27.1	43.4							
115	38.1	34.1	18.4	14.8	17.9	32.6	41.6	36.3	20.1	17.4	22.4	38.3							
120	32.5	28.6	17.5	15.4	17.7	27.1	35.5	30.5	19.8	17.9	20.2	32.7							
125	27.7	23.9	17.9	16.4	18.1	23.1	30.5	26.0	20.2	18.7	20.1	26.3							
130	24.3	21.1	18.6	17.6	18.9	21.0	26.6	23.2	20.7	19.6	20.5	23.8							
135	22.4	21.3	19.6	18.9	19.9	21.5	24.1	23.3	21.6	20.7	21.2	22.8							
140	23.0	22.2	20.7	20.2	21.0	22.3	24.3	24.0	22.7	21.9	22.1	23.4							
145	23.8	23.2	21.8	21.5	22.2	23.3	25.0	24.7	23.7	23.1	23.1	24.2							
150	24.7	24.2	23.0	22.8	23.5	24.2	25.6	25.5	24.7	24.2	24.1	24.9							
155	25.6	25.2	24.3	24.2	24.7	25.1	26.3	26.2	25.7	25.3	25.1	25.7							
160	26.6	26.2	25.6	25.5	25.9	26.1	27.0	26.8	26.7	26.3	26.2	26.5							
165	27.7	27.2	26.7	26.6	26.9	27.0	27.8	27.4	27.5	27.2	27.1	27.2							
170	28.7	28.1	27.7	27.6	27.8	27.8	28.6	28.0	28.1	27.9	27.8	27.9							
175	29.5	28.7	28.4	28.4	28.4	28.4	29.2	28.4	28.5	28.3	28.2	28.2							
180	29.4	28.7	28.6	28.6	28.5	28.4	29.5	28.6	28.7	28.5	28.5	28.4							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: