
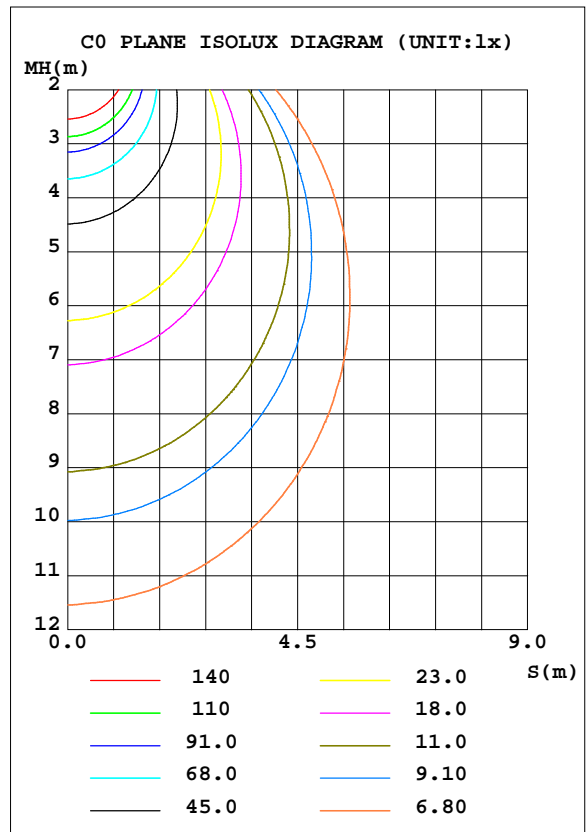


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.60V I:0.0930A P:19.500W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2675.47x1 lm		
Name: NS63-595*595-20W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 137.20 lm/W			
MODEL		I _{max} (cd)	906.5	S/MH(C0/180)	1.24
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2675.5	η UP, DN(C0-180)	1.1, 48.2
NOMINAL FLUX(lm)	2675.47	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.2, 49.6
LAMPS INSIDE	1	η up(%)	2.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.8	CIBSE SHR MAX	1.35

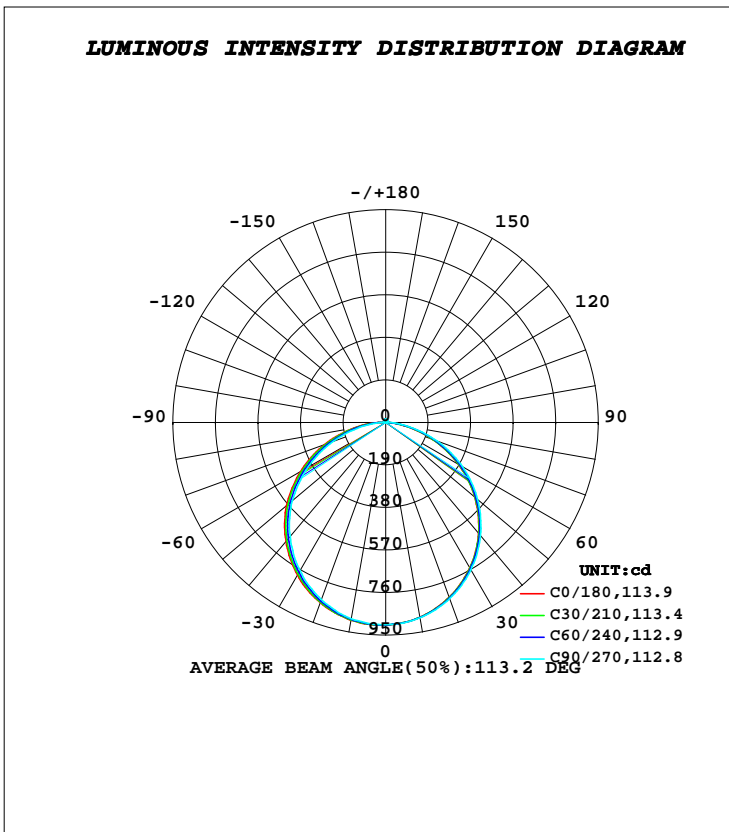

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	882.9	884.0	885.5	890.3	896.8	893.8	889.2	884.2	0- 10	85.54	85.54	3.2,3.2
20	831.2	832.4	837.2	845.8	856.0	851.4	842.0	834.5	10- 20	245.1	330.7	12.4,12.4
30	750.7	753.8	761.0	774.4	787.3	778.3	765.3	755.3	20- 30	371.9	702.6	26.3,26.3
40	646.4	650.4	658.8	677.6	693.2	681.4	664.4	652.0	30- 40	449.5	1152	43.1,43.1
50	519.9	523.9	537.1	558.5	579.2	562.7	545.4	527.7	40- 50	468.3	1620	60.6,60.6
60	376.5	382.1	397.0	419.9	440.3	424.0	402.0	385.2	50- 60	424.4	2045	76.4,76.4
70	223.4	229.7	245.4	270.1	291.7	274.3	250.4	232.9	60- 70	324.6	2370	88.6,88.6
80	82.67	88.62	99.35	123.7	143.8	128.6	106.6	93.83	70- 80	188.1	2558	95.6,95.6
90	5.224	5.543	5.741	14.15	25.38	19.45	10.05	6.389	80- 90	57.92	2615	97.8,97.8
100	6.531	6.385	6.102	6.316	7.315	7.344	7.372	7.486	90-100	7.502	2623	98,98
110	7.683	7.531	7.416	7.412	8.498	8.574	8.644	8.678	100-110	7.891	2631	98.3,98.3
120	8.816	8.682	8.593	8.565	9.572	9.669	9.759	9.778	110-120	8.540	2639	98.7,98.7
130	9.986	9.848	9.786	9.742	10.69	10.75	10.85	10.84	120-130	8.730	2648	99,99
140	11.14	11.05	10.94	10.94	11.77	11.85	11.93	11.91	130-140	8.407	2657	99.3,99.3
150	12.41	12.31	12.20	12.20	12.82	12.91	12.96	12.95	140-150	7.531	2664	99.6,99.6
160	13.55	13.42	13.38	13.33	13.84	13.84	13.97	13.84	150-160	6.068	2670	99.8,99.8
170	14.21	14.19	14.14	14.11	14.31	14.34	14.38	14.33	160-170	3.948	2674	99.9,99.9
180	14.44	14.49	14.45	14.43	14.45	14.48	14.46	14.43	170-180	1.371	2675	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.60V I:0.0930A P:19.500W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2675.47x1 lm		
Name: NS63-595*595-20W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

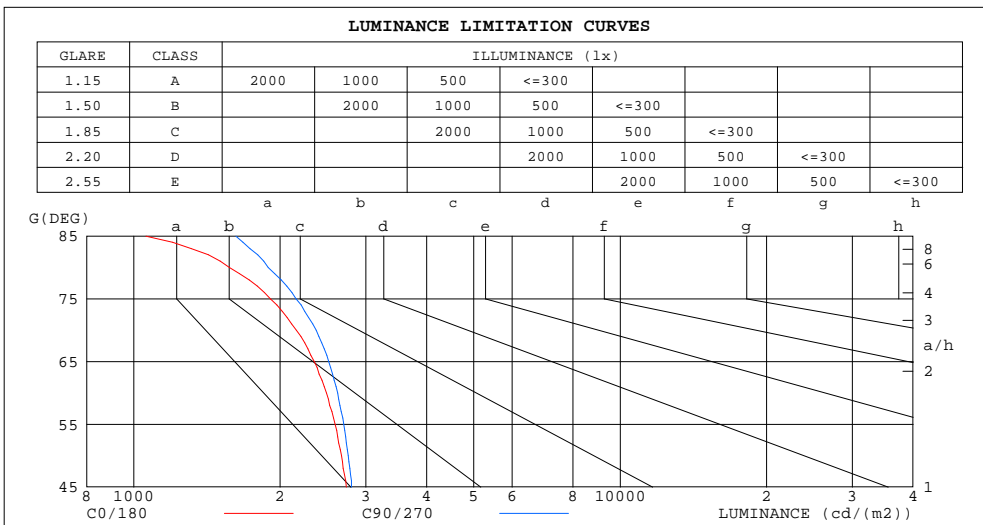

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1060	1621
80	1574	1891
75	1911	2157
70	2159	2372
65	2353	2516
60	2489	2625
55	2593	2702
50	2674	2762
45	2734	2805


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.60V I:0.0930A P:19.500W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2675.47x1 lm		
Name: NS63-595*595-20W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.81
2.0	.90	.83	.77	.88	.81	.76	.84	.78	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.65	.60	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.53	.65	.58	.52	.63	.57	.52	.60	.55	.51	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.45	.54	.48	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.36
7.0	.51	.42	.36	.50	.41	.35	.48	.40	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.36	.31	.42	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

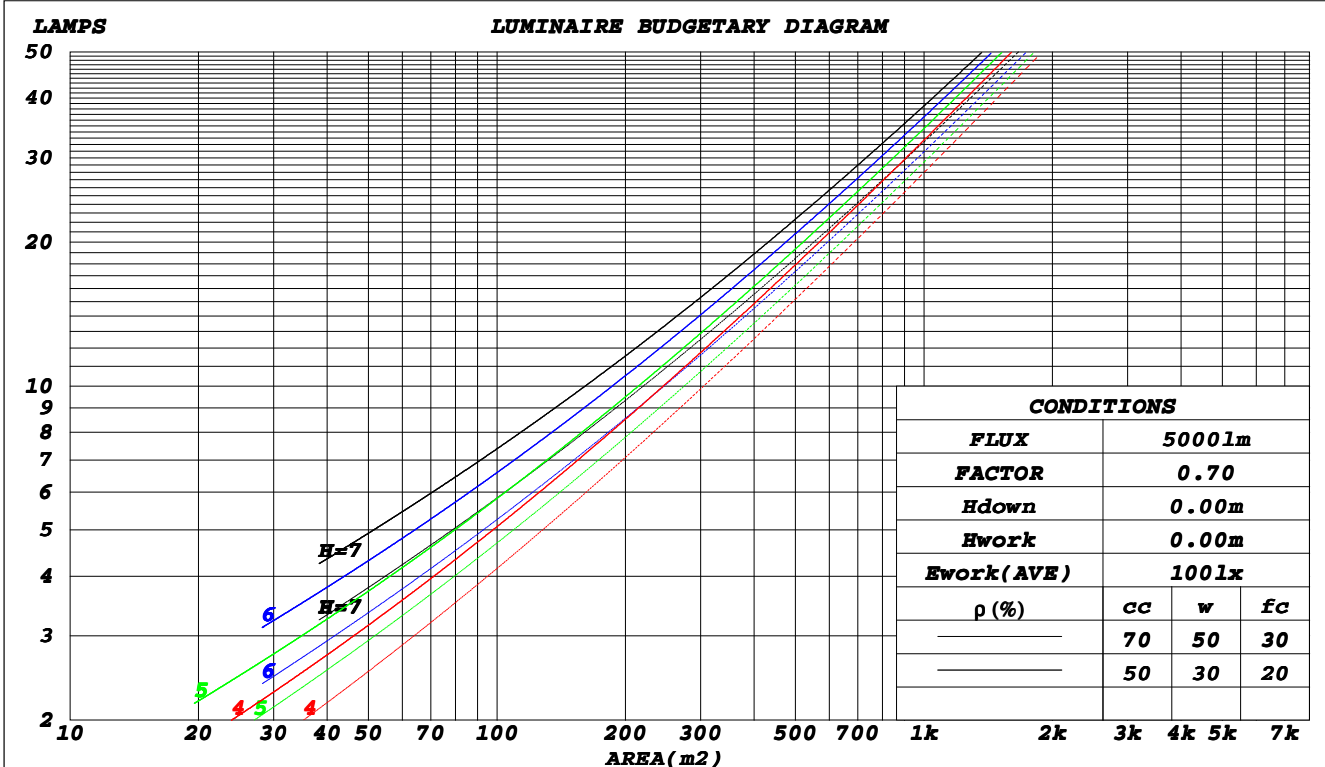

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.60V I:0.0930A P:19.500W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2675.47x1 lm		
Name: NS63-595*595-20W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.313	.178	.056	.306	.174	.055	.291	.167	.053	.278	.160	.051	.265	.154	.050	
2.0	.293	.161	.049	.287	.158	.049	.274	.152	.047	.262	.147	.046	.251	.142	.045	
3.0	.271	.144	.043	.265	.142	.043	.253	.137	.042	.243	.133	.041	.233	.129	.040	
4.0	.250	.130	.038	.244	.128	.038	.234	.124	.037	.225	.121	.036	.216	.117	.036	
5.0	.231	.118	.034	.226	.116	.034	.217	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.214	.107	.031	.209	.106	.030	.201	.103	.030	.194	.101	.030	.187	.098	.029	
7.0	.199	.098	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.174	.091	.027	
8.0	.186	.091	.026	.182	.090	.025	.176	.088	.025	.169	.086	.025	.164	.084	.024	
9.0	.174	.084	.023	.171	.083	.023	.165	.082	.023	.159	.080	.023	.154	.078	.023	
10.0	.164	.078	.022	.161	.078	.022	.155	.076	.021	.150	.075	.021	.145	.073	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.177	.177	.177	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.198	.173	.151	.169	.149	.130	.116	.102	.090	.067	.059	.052	.021	.019	.017	
2.0	.190	.149	.115	.163	.128	.100	.111	.089	.069	.064	.052	.041	.021	.017	.013	
3.0	.182	.132	.092	.156	.114	.079	.107	.079	.056	.062	.046	.033	.020	.015	.011	
4.0	.174	.119	.076	.150	.102	.066	.103	.071	.046	.060	.042	.027	.019	.014	.009	
5.0	.167	.108	.065	.143	.094	.056	.099	.065	.040	.057	.038	.024	.018	.013	.008	
6.0	.160	.100	.057	.137	.086	.049	.095	.061	.035	.055	.036	.021	.018	.012	.007	
7.0	.153	.093	.051	.132	.081	.044	.091	.057	.031	.053	.033	.019	.017	.011	.006	
8.0	.147	.087	.046	.126	.076	.040	.087	.053	.029	.051	.031	.017	.016	.010	.006	
9.0	.141	.082	.043	.121	.071	.037	.084	.050	.027	.049	.030	.016	.016	.010	.005	
10.0	.135	.078	.040	.116	.068	.035	.081	.048	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.60V I:0.0930A P:19.500W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2675.47x1 lm		
Name: NS63-595*595-20W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.9	17.4	16.2	17.6	17.9	16.1	17.6	16.4	17.8	18.0
3H	17.3	18.7	17.6	18.9	19.2	17.6	18.9	17.9	19.2	19.5
4H	17.8	19.1	18.1	19.4	19.7	18.1	19.4	18.5	19.7	20.0
6H	18.1	19.3	18.5	19.6	20.0	18.5	19.8	18.9	20.1	20.4
8H	18.2	19.4	18.5	19.7	20.0	18.6	19.8	19.0	20.2	20.5
12H	18.2	19.3	18.6	19.7	20.0	18.7	19.9	19.1	20.2	20.5
4H 2H	16.5	17.8	16.8	18.1	18.4	16.6	17.9	17.0	18.2	18.5
3H	18.0	19.2	18.4	19.5	19.9	18.3	19.4	18.7	19.8	20.1
4H	18.7	19.7	19.1	20.1	20.4	19.0	20.0	19.4	20.4	20.7
6H	19.1	20.0	19.5	20.4	20.8	19.5	20.4	19.9	20.8	21.2
8H	19.2	20.1	19.6	20.5	20.9	19.6	20.5	20.1	20.9	21.3
12H	19.2	20.0	19.7	20.5	20.9	19.7	20.5	20.2	21.0	21.4
8H 4H	18.9	19.8	19.3	20.2	20.6	19.2	20.0	19.6	20.4	20.9
6H	19.4	20.2	19.9	20.6	21.1	19.8	20.5	20.3	21.0	21.4
8H	19.6	20.3	20.1	20.7	21.2	20.0	20.7	20.5	21.1	21.6
12H	19.7	20.3	20.2	20.8	21.3	20.2	20.8	20.7	21.2	21.8
12H 4H	18.9	19.7	19.3	20.1	20.6	19.1	19.9	19.6	20.4	20.8
6H	19.5	20.1	20.0	20.6	21.1	19.8	20.5	20.3	20.9	21.4
8H	19.7	20.2	20.2	20.7	21.3	20.1	20.6	20.6	21.1	21.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 2675 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.4)
 Area: 0.3025 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.60V I:0.0930A P:19.500W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2675.47x1 lm		
Name: NS63-595*595-20W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	54	44	38	31
0.80	67	55	47	65	54	47	63	53	47	40
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	71	64	80	71	64	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	81	76	68
2.50	98	90	84	96	88	83	92	86	81	72
3.00	101	94	89	99	93	87	95	89	85	76
4.00	105	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.60V I:0.0930A P:19.500W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2675.47x1 lm		
Name: NS63-595*595-20W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

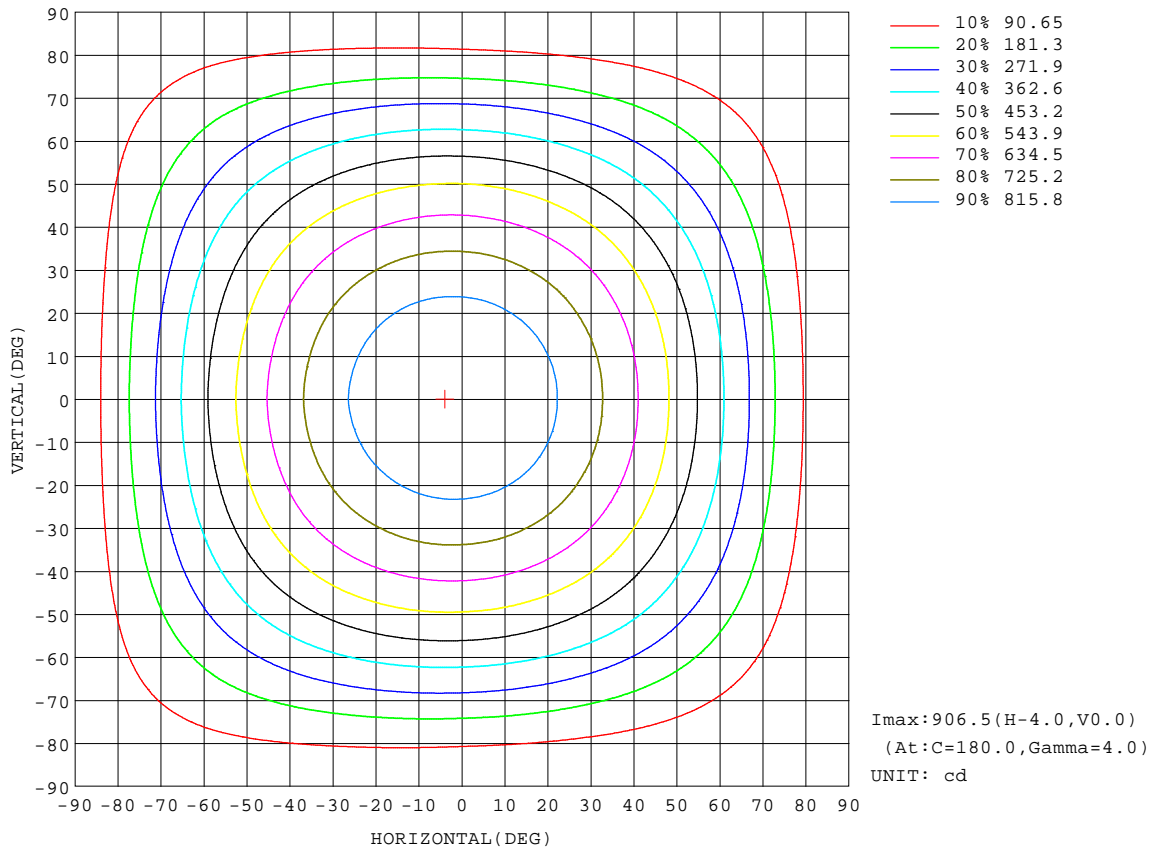


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:220.60V I:0.0930A P:19.500W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2675.47x1 lm		
Name: NS63-595*595-20W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

Flux out:1926 lm

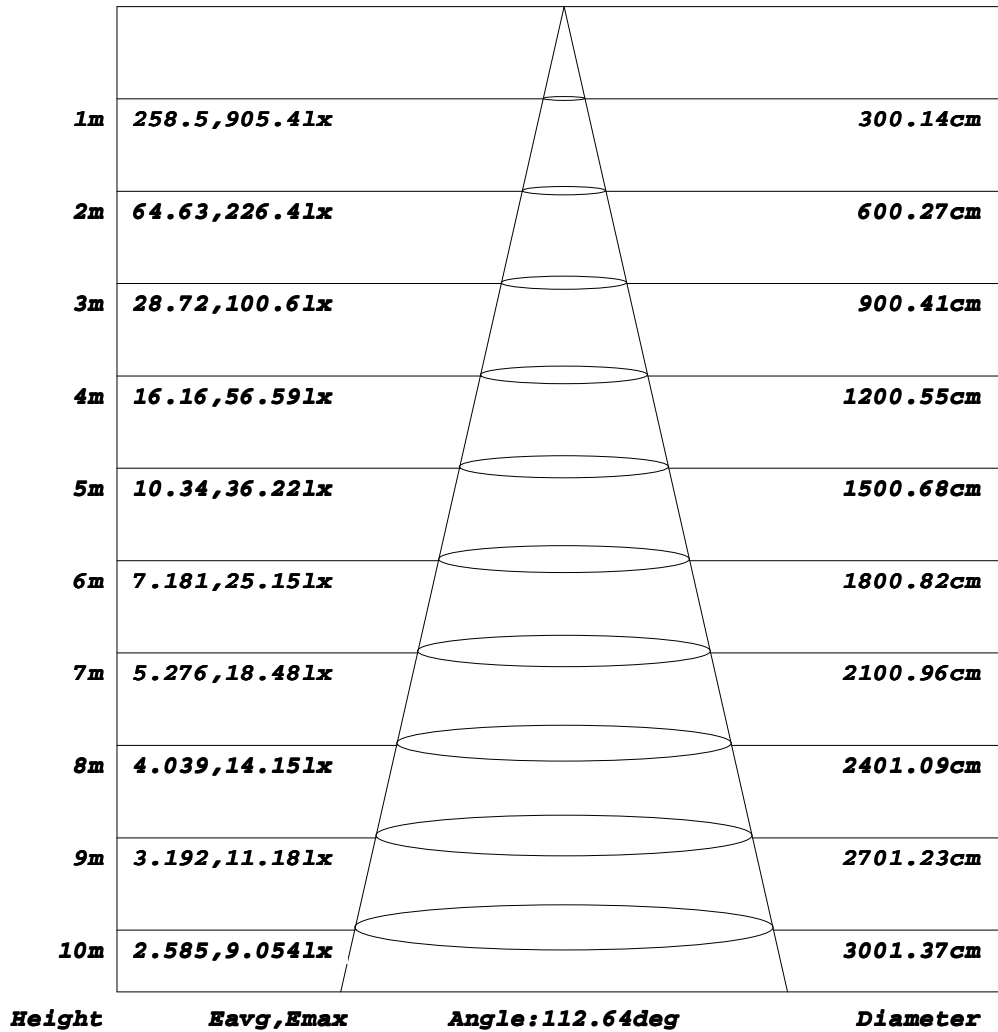


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:220.60V I:0.0930A P:19.500W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2675.47x1 lm		
Name: NS63-595*595-20W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

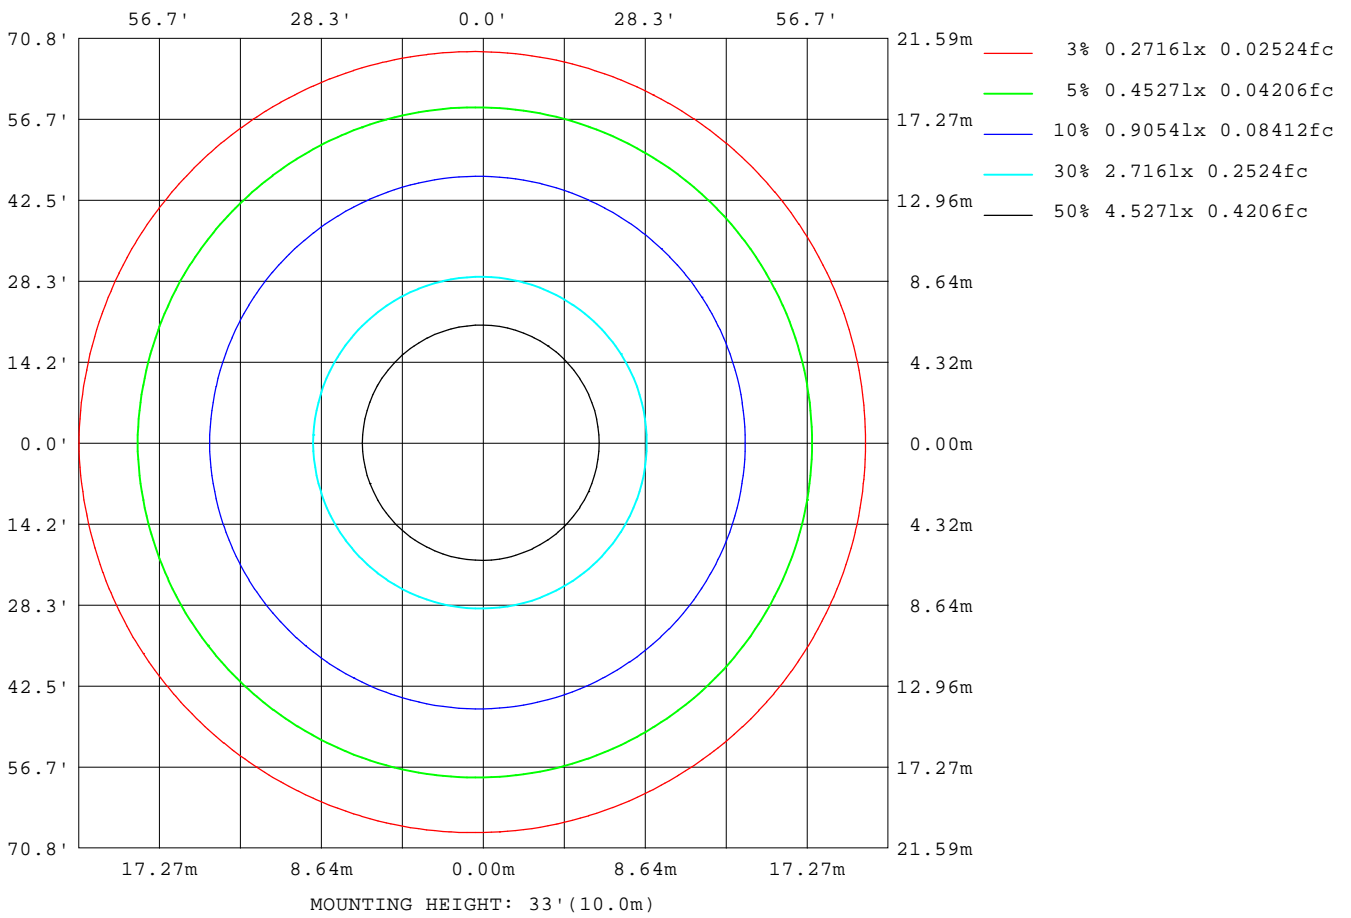

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

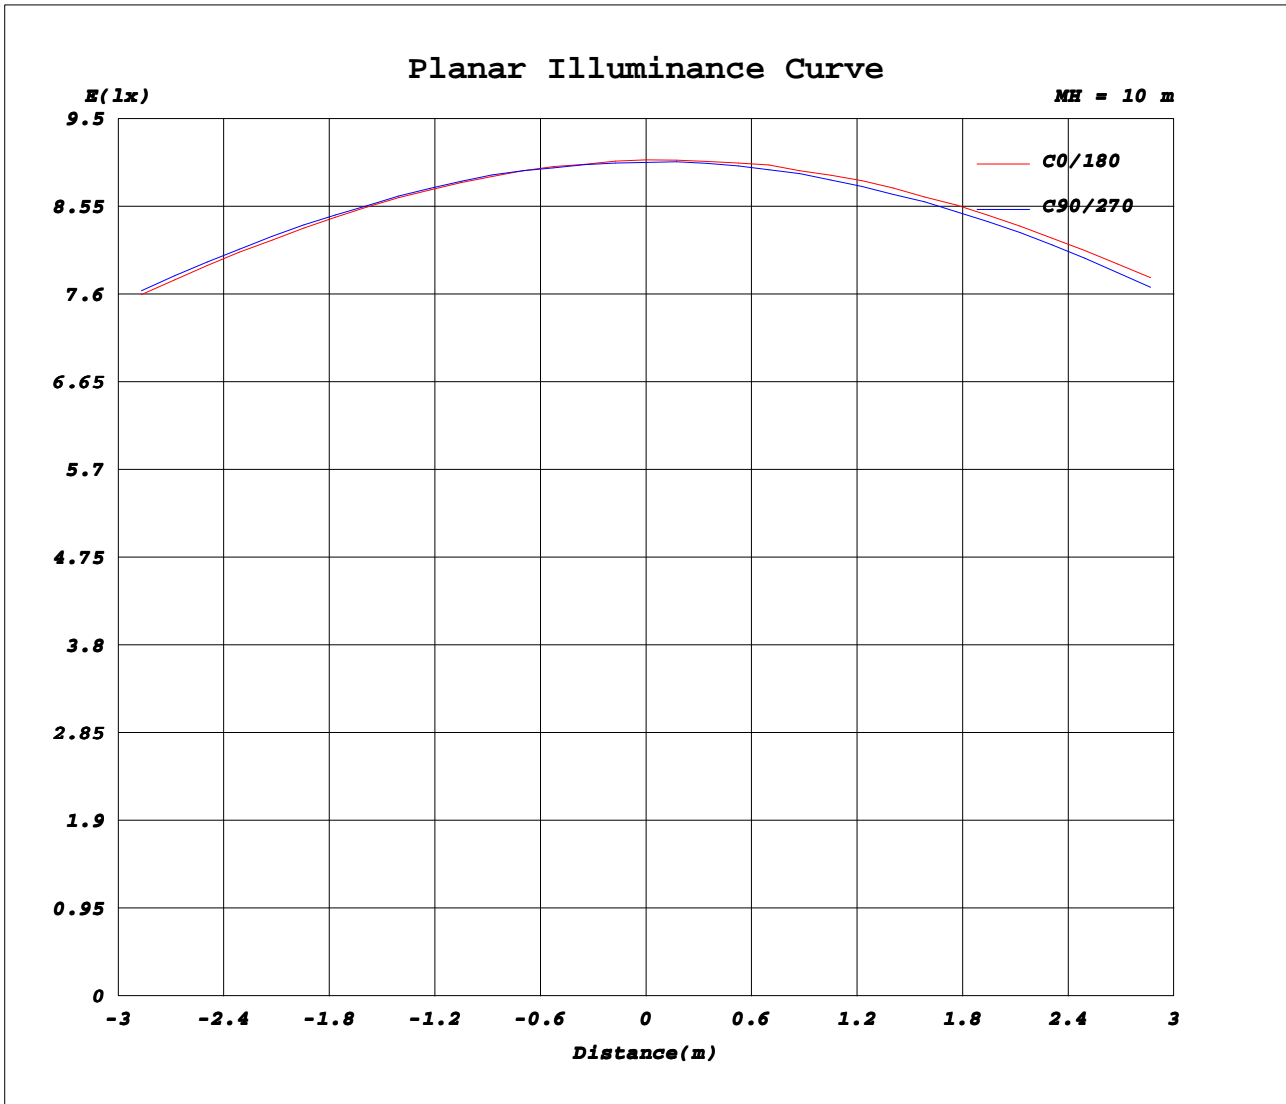

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.60V I:0.0930A P:19.500W PF:0.9490 Freq:50.00Hz		
Lamp Flux:2675.47x1 lm		
Name: NS63-595*595-20W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	905	905	904	903	902	903	905	905	904	903	902	903							
5	898	897	898	900	899	901	904	904	902	901	898	897							
10	883	884	884	885	888	892	897	895	892	889	885	883							
15	861	861	862	865	870	875	880	879	875	869	865	862							
20	831	831	833	837	842	849	856	854	849	842	836	833							
25	794	796	799	803	809	818	826	822	815	807	801	796							
30	751	752	756	761	769	779	787	783	774	765	758	753							
35	700	703	707	713	724	736	744	738	729	719	709	703							
40	646	649	652	659	671	684	693	687	676	664	655	649							
45	585	588	592	600	613	628	639	631	618	607	597	589							
50	520	521	527	537	550	567	579	569	556	545	532	523							
55	450	451	458	469	483	498	510	502	488	474	462	454							
60	376	379	386	397	412	428	440	431	417	402	390	381							
65	301	302	310	322	337	354	367	358	342	327	315	306							
70	223	226	233	245	261	279	292	282	266	250	237	228							
75	150	152	158	169	185	203	216	207	191	175	164	156							
80	82.7	86.1	91.2	99.4	115	132	144	136	121	107	97.6	90.0							
85	28.0	30.4	35.2	42.7	54.5	68.4	79.0	73.0	62.2	51.4	42.6	34.9							
90	5.22	5.66	5.42	5.74	10.2	18.1	25.4	22.6	16.3	10.0	7.12	5.66							
95	5.87	6.04	5.88	5.57	5.66	6.13	6.72	6.72	6.66	6.71	6.93	6.72							
100	6.53	6.47	6.30	6.10	6.08	6.56	7.31	7.37	7.32	7.37	7.59	7.38							
105	7.14	7.00	6.89	6.79	6.60	7.05	7.94	8.01	7.97	8.03	8.22	7.99							
110	7.68	7.57	7.49	7.42	7.20	7.62	8.50	8.58	8.57	8.64	8.81	8.55							
115	8.23	8.14	8.06	8.00	7.80	8.18	9.01	9.11	9.12	9.20	9.35	9.09							
120	8.82	8.71	8.65	8.59	8.38	8.75	9.57	9.67	9.67	9.76	9.91	9.65							
125	9.40	9.28	9.22	9.18	8.96	9.33	10.1	10.2	10.2	10.3	10.4	10.2							
130	9.99	9.87	9.82	9.79	9.57	9.92	10.7	10.8	10.8	10.9	11.0	10.7							
135	10.6	10.5	10.4	10.4	10.2	10.5	11.2	11.3	11.3	11.4	11.5	11.3							
140	11.1	11.1	11.0	10.9	10.8	11.1	11.8	11.8	11.9	11.9	12.0	11.8							
145	11.7	11.7	11.6	11.6	11.4	11.7	12.3	12.4	12.4	12.4	12.5	12.3							
150	12.4	12.3	12.3	12.2	12.1	12.3	12.8	12.9	12.9	13.0	13.0	12.9							
155	13.1	12.9	12.9	12.9	12.7	12.9	13.3	13.4	13.4	13.5	13.5	13.4							
160	13.5	13.4	13.4	13.4	13.2	13.4	13.8	13.8	13.8	14.0	13.9	13.8							
165	13.9	13.9	13.8	13.8	13.7	13.8	14.1	14.1	14.1	14.2	14.2	14.1							
170	14.2	14.2	14.2	14.1	14.1	14.1	14.3	14.3	14.3	14.4	14.4	14.3							
175	14.4	14.4	14.4	14.4	14.3	14.4	14.4	14.4	14.5	14.5	14.4	14.4							
180	14.4	14.5	14.5	14.5	14.4	14.4	14.4	14.5	14.5	14.5	14.4	14.4							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: