
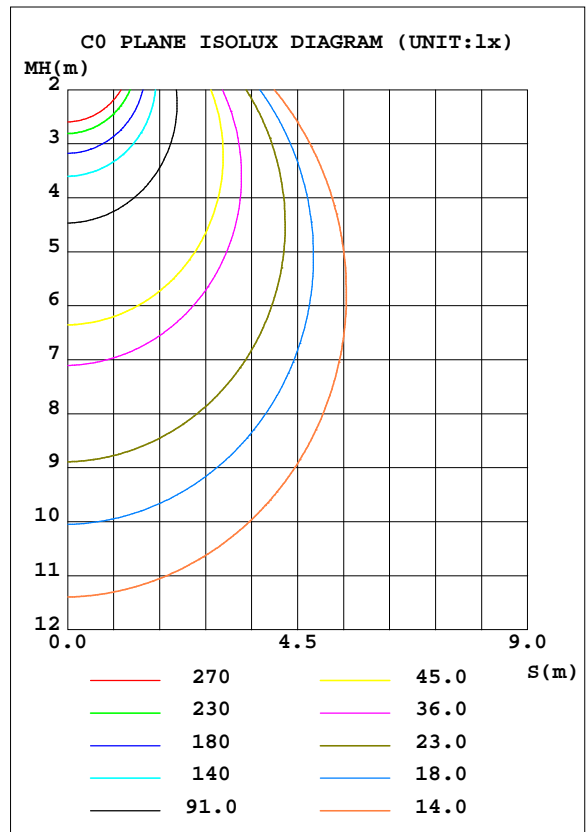


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.60V I:0.1870A P:39.500W PF:0.9580 Freq:50.00Hz		
Lamp Flux:5378.99x1 lm		
Name: NS63-595*595-40W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 136.18 lm/W			
MODEL		I _{max} (cd)	1819	S/MH(C0/180)	1.24
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	5379.0	η UP, DN(C0-180)	1.1,48.1
NOMINAL FLUX(lm)	5378.99	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.2,49.6
LAMPS INSIDE	1	η up(%)	2.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.7	CIBSE SHR MAX	1.35

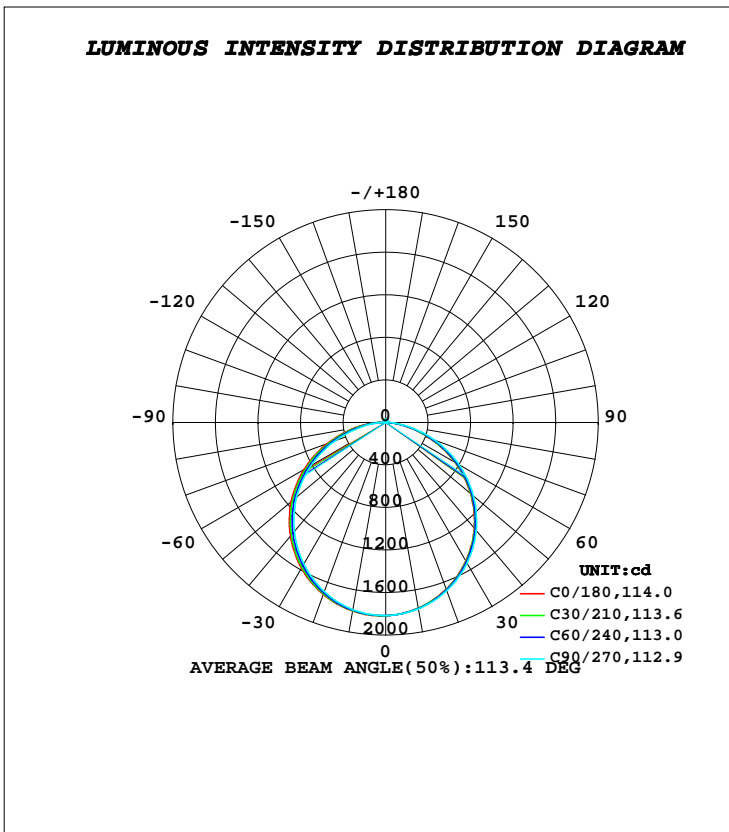

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1773	1774	1779	1789	1800	1795	1787	1777	0- 10	171.8	171.8	3.19,3.19
20	1668	1672	1683	1702	1720	1710	1692	1677	10- 20	492.5	664.4	12.4,12.4
30	1507	1513	1528	1557	1583	1565	1539	1519	20- 30	747.3	1412	26.2,26.2
40	1297	1306	1325	1362	1393	1369	1336	1311	30- 40	903.3	2315	43,43
50	1044	1055	1079	1123	1163	1131	1096	1062	40- 50	940.9	3256	60.5,60.5
60	755.0	767.4	796.7	845.4	887.6	852.9	811.1	774.2	50- 60	853.6	4109	76.4,76.4
70	449.2	461.4	492.0	543.5	587.9	552.1	504.0	469.4	60- 70	653.2	4763	88.5,88.5
80	165.5	177.6	199.0	248.5	291.3	260.2	216.8	188.5	70- 80	378.7	5141	95.6,95.6
90	10.61	11.24	11.68	29.04	53.08	39.09	21.58	13.13	80- 90	116.7	5258	97.7,97.7
100	13.22	12.96	12.39	12.81	14.79	14.85	14.92	15.14	90-100	15.26	5273	98,98
110	15.46	15.23	15.01	15.04	17.15	17.30	17.44	17.50	100-110	15.96	5289	98.3,98.3
120	17.70	17.50	17.37	17.32	19.33	19.50	19.68	19.68	110-120	17.24	5306	98.7,98.7
130	20.02	19.82	19.76	19.69	21.58	21.67	21.85	21.79	120-130	17.59	5324	99,99
140	22.34	22.19	22.13	22.11	23.75	23.87	23.95	23.92	130-140	16.93	5341	99.3,99.3
150	24.86	24.73	24.70	24.63	25.82	26.01	25.97	25.98	140-150	15.16	5356	99.6,99.6
160	27.15	26.95	27.06	26.82	27.82	27.86	28.02	27.76	150-160	12.20	5368	99.8,99.8
170	28.51	28.51	28.56	28.37	28.77	28.82	28.91	28.76	160-170	7.937	5376	99.9,99.9
180	29.00	29.10	29.11	28.98	29.03	29.09	29.11	28.98	170-180	2.755	5379	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.60V I:0.1870A P:39.500W PF:0.9580 Freq:50.00Hz		
Lamp Flux:5378.99x1 lm		
Name: NS63-595*595-40W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

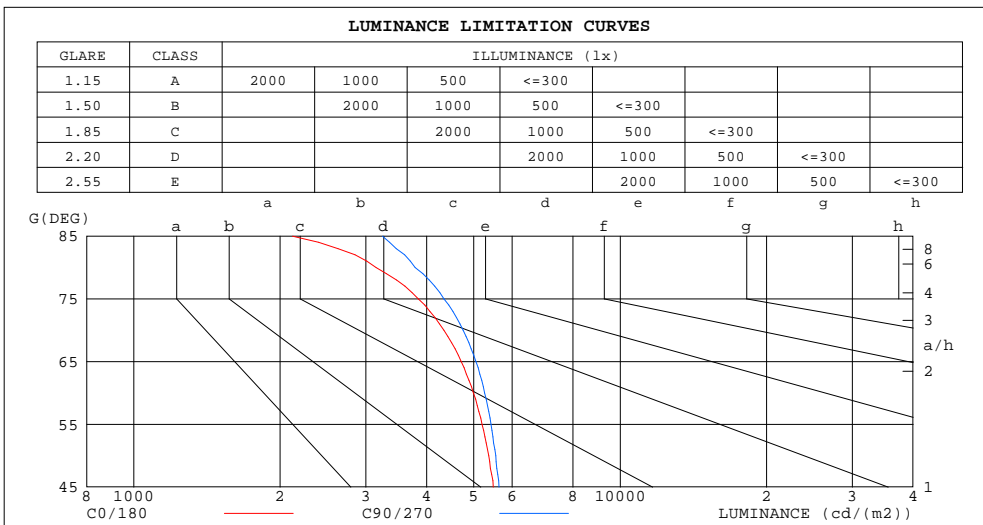


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.60V I:0.1870A P:39.500W PF:0.9580 Freq:50.00Hz		
Lamp Flux:5378.99x1 lm		
Name: NS63-595*595-40W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)										
0.0	1.19	1.19	1.19	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98	
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.81	
2.0	.90	.83	.77	.88	.81	.76	.84	.78	.74	.80	.76	.72	.77	.73	.70	.68	
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.65	.60	.68	.63	.59	.57	
4.0	.70	.61	.54	.68	.60	.53	.65	.58	.52	.63	.56	.51	.60	.55	.51	.48	
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.45	.54	.48	.44	.42	
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.36	
7.0	.51	.42	.36	.50	.41	.35	.48	.40	.35	.46	.40	.35	.45	.39	.34	.32	
8.0	.46	.38	.32	.45	.37	.32	.44	.36	.31	.42	.36	.31	.41	.35	.31	.29	
9.0	.42	.34	.28	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26	
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23	

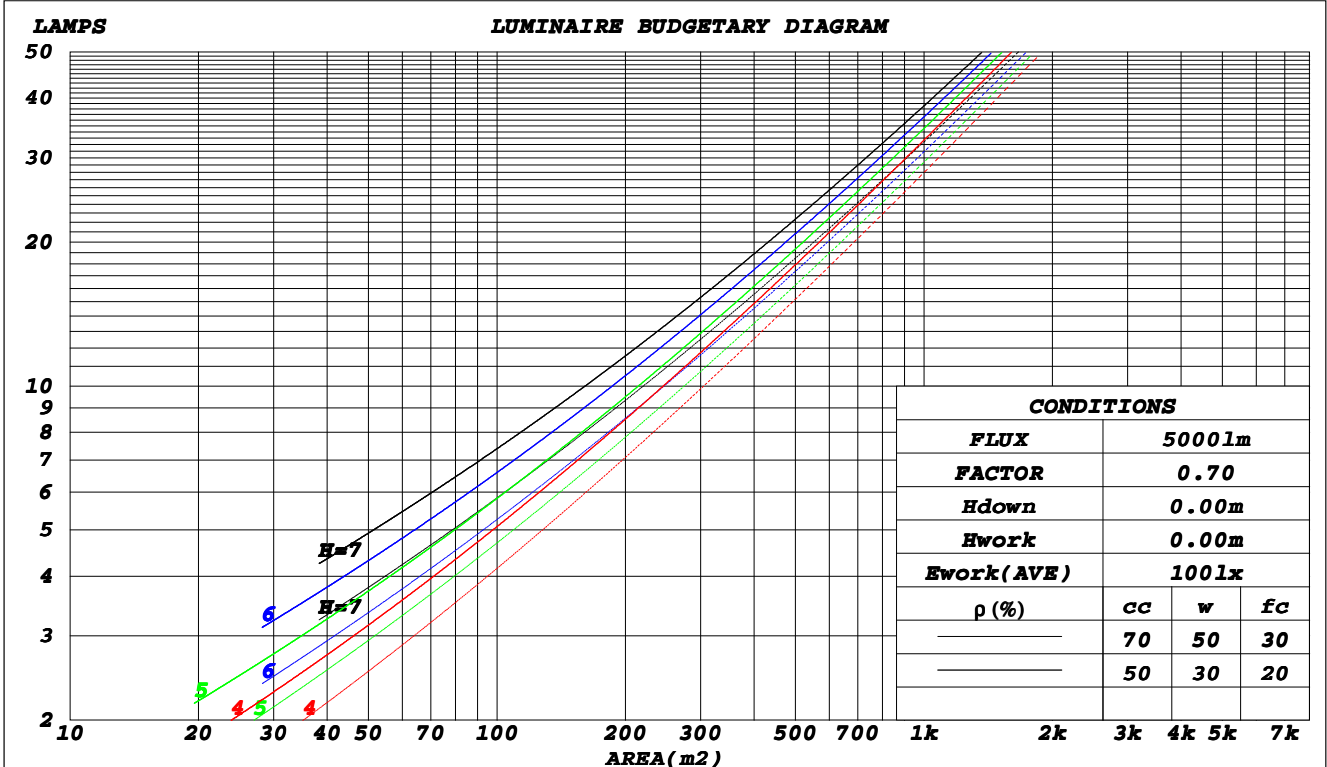

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.60V I:0.1870A P:39.500W PF:0.9580 Freq:50.00Hz		
Lamp Flux:5378.99x1 lm		
Name: NS63-595*595-40W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.313	.178	.056	.306	.174	.055	.291	.167	.053	.278	.160	.051	.265	.154	.050	
2.0	.294	.161	.049	.287	.158	.049	.274	.152	.047	.262	.147	.046	.251	.142	.045	
3.0	.271	.144	.043	.265	.142	.043	.253	.137	.042	.243	.133	.041	.233	.129	.040	
4.0	.250	.130	.038	.244	.128	.038	.234	.124	.037	.225	.121	.036	.216	.117	.036	
5.0	.231	.118	.034	.226	.116	.034	.217	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.214	.107	.031	.210	.106	.030	.201	.103	.030	.194	.101	.030	.187	.098	.029	
7.0	.199	.098	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.174	.091	.027	
8.0	.186	.091	.026	.182	.090	.025	.176	.088	.025	.169	.086	.025	.164	.084	.024	
9.0	.174	.084	.023	.171	.083	.023	.165	.082	.023	.159	.080	.023	.154	.078	.023	
10.0	.164	.078	.022	.161	.078	.022	.155	.076	.021	.150	.075	.021	.145	.073	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.177	.177	.177	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.198	.173	.151	.169	.149	.130	.116	.102	.090	.067	.059	.052	.021	.019	.017	
2.0	.190	.149	.115	.163	.129	.100	.111	.089	.069	.064	.052	.041	.021	.017	.013	
3.0	.182	.132	.092	.156	.114	.079	.107	.079	.056	.062	.046	.033	.020	.015	.011	
4.0	.175	.119	.076	.150	.102	.066	.103	.071	.046	.060	.042	.027	.019	.014	.009	
5.0	.167	.108	.065	.144	.094	.056	.099	.065	.040	.057	.038	.024	.018	.013	.008	
6.0	.160	.100	.057	.138	.087	.049	.095	.061	.035	.055	.036	.021	.018	.012	.007	
7.0	.153	.093	.051	.132	.081	.044	.091	.057	.031	.053	.033	.019	.017	.011	.006	
8.0	.147	.087	.046	.126	.076	.041	.087	.053	.029	.051	.031	.017	.016	.010	.006	
9.0	.141	.082	.043	.121	.071	.038	.084	.050	.027	.049	.030	.016	.016	.010	.005	
10.0	.135	.078	.040	.116	.068	.035	.081	.048	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.60V I:0.1870A P:39.500W PF:0.9580 Freq:50.00Hz		
Lamp Flux:5378.99x1 lm		
Name: NS63-595*595-40W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.3	19.8	18.6	20.0	20.3	18.5	20.0	18.8	20.2	20.5
3H	19.7	21.1	20.0	21.3	21.6	20.0	21.4	20.3	21.6	21.9
4H	20.2	21.5	20.5	21.8	22.1	20.5	21.9	20.9	22.2	22.5
6H	20.5	21.8	20.9	22.1	22.4	20.9	22.2	21.3	22.5	22.8
8H	20.6	21.8	21.0	22.1	22.5	21.1	22.3	21.4	22.6	22.9
12H	20.6	21.8	21.0	22.1	22.4	21.1	22.3	21.5	22.6	23.0
4H 2H	18.9	20.2	19.2	20.5	20.8	19.0	20.3	19.4	20.6	20.9
3H	20.4	21.6	20.8	21.9	22.3	20.7	21.8	21.1	22.2	22.5
4H	21.1	22.1	21.5	22.5	22.9	21.4	22.4	21.8	22.8	23.2
6H	21.5	22.4	21.9	22.8	23.2	21.9	22.8	22.3	23.2	23.6
8H	21.6	22.5	22.1	22.9	23.3	22.1	22.9	22.5	23.3	23.8
12H	21.7	22.5	22.1	22.9	23.3	22.2	23.0	22.6	23.4	23.8
8H 4H	21.3	22.2	21.8	22.6	23.0	21.6	22.4	22.0	22.9	23.3
6H	21.9	22.6	22.3	23.0	23.5	22.2	22.9	22.7	23.4	23.9
8H	22.0	22.7	22.5	23.1	23.6	22.5	23.1	23.0	23.6	24.1
12H	22.1	22.7	22.7	23.2	23.7	22.6	23.2	23.1	23.7	24.2
12H 4H	21.3	22.1	21.8	22.5	23.0	21.6	22.4	22.0	22.8	23.3
6H	21.9	22.5	22.4	23.0	23.5	22.2	22.9	22.7	23.4	23.9
8H	22.1	22.7	22.6	23.2	23.7	22.5	23.1	23.0	23.6	24.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 5379 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.8)
 Area: 0.3025 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.60V I:0.1870A P:39.500W PF:0.9580 Freq:50.00Hz Lamp Flux:5378.99x1 lm		
Name: NS63-595*595-40W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	54	44	38	31
0.80	67	55	47	65	54	47	63	53	47	40
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	71	64	80	71	64	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	81	76	68
2.50	98	90	84	96	88	83	92	86	81	72
3.00	101	94	89	99	93	87	95	89	85	76
4.00	105	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.60V I:0.1870A P:39.500W PF:0.9580 Freq:50.00Hz		
Lamp Flux:5378.99x1 lm		
Name: NS63-595*595-40W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

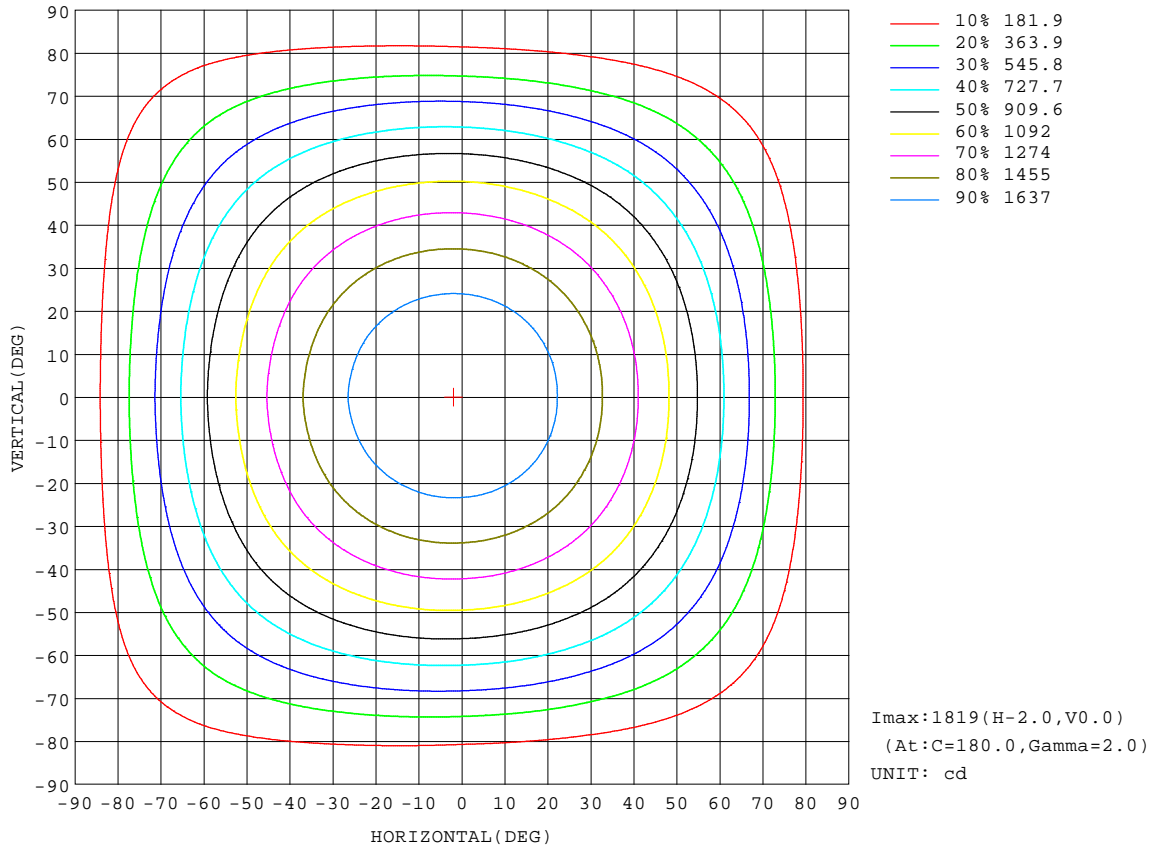


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:220.60V I:0.1870A P:39.500W PF:0.9580 Freq:50.00Hz		
Lamp Flux:5378.99x1 lm		
Name: NS63-595*595-40W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

Flux out:3870 lm

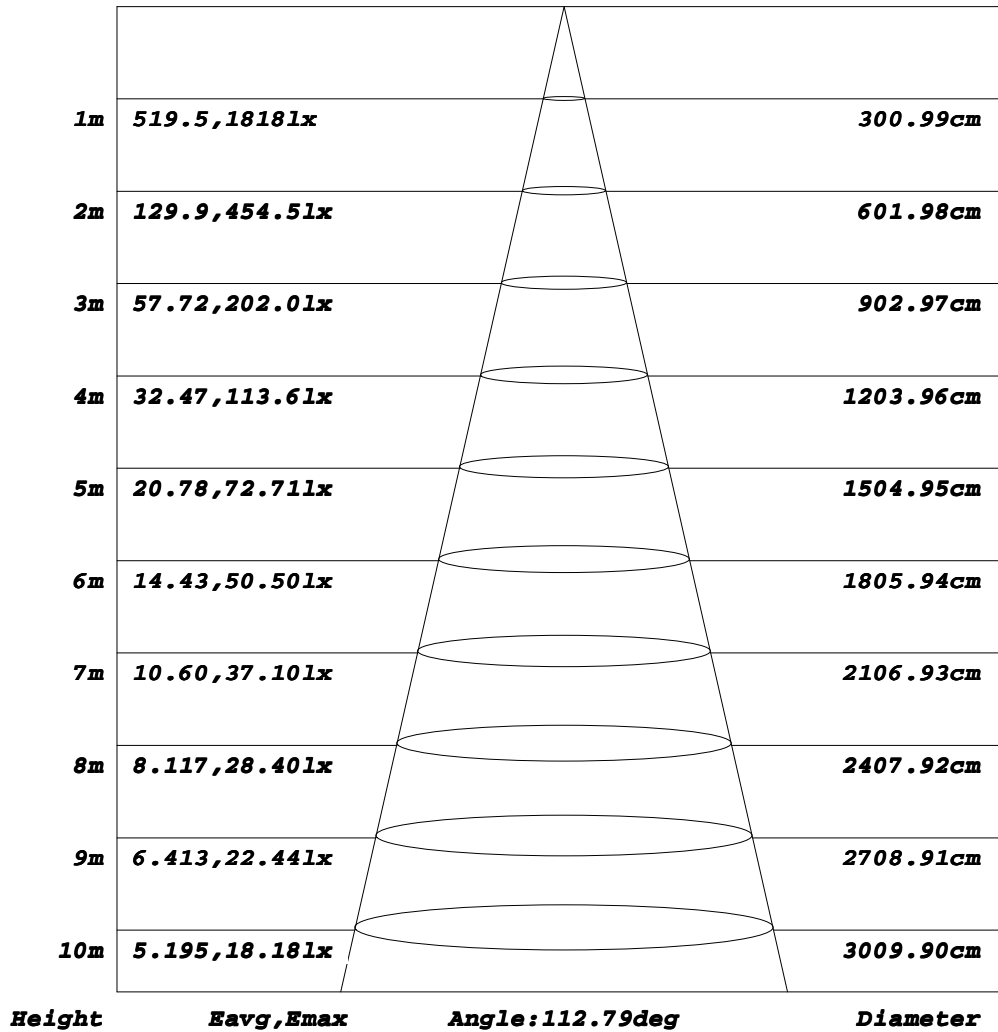


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:220.60V I:0.1870A P:39.500W PF:0.9580 Freq:50.00Hz		
Lamp Flux:5378.99x1 lm		
Name: NS63-595*595-40W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

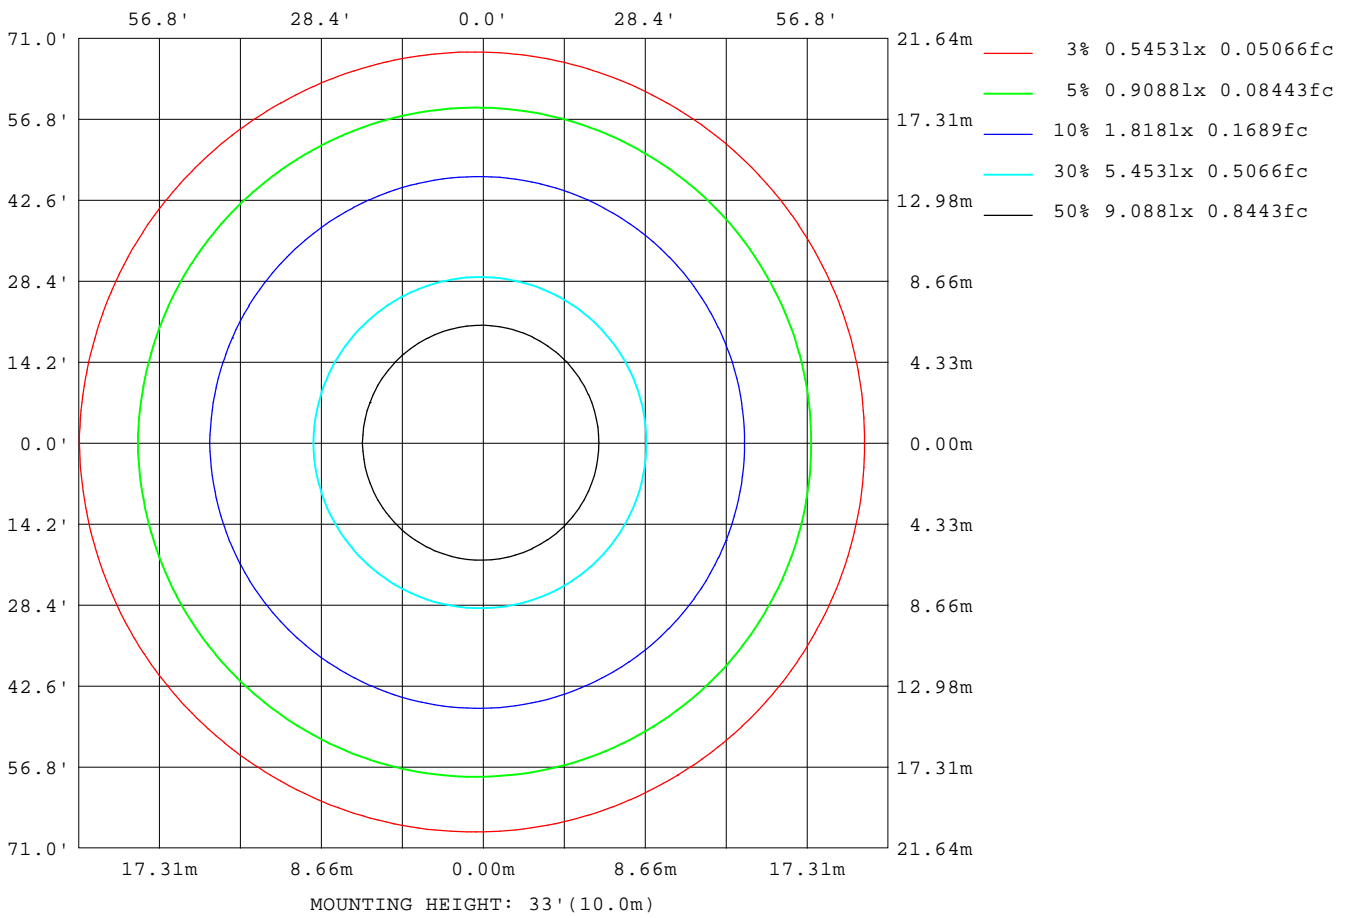

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

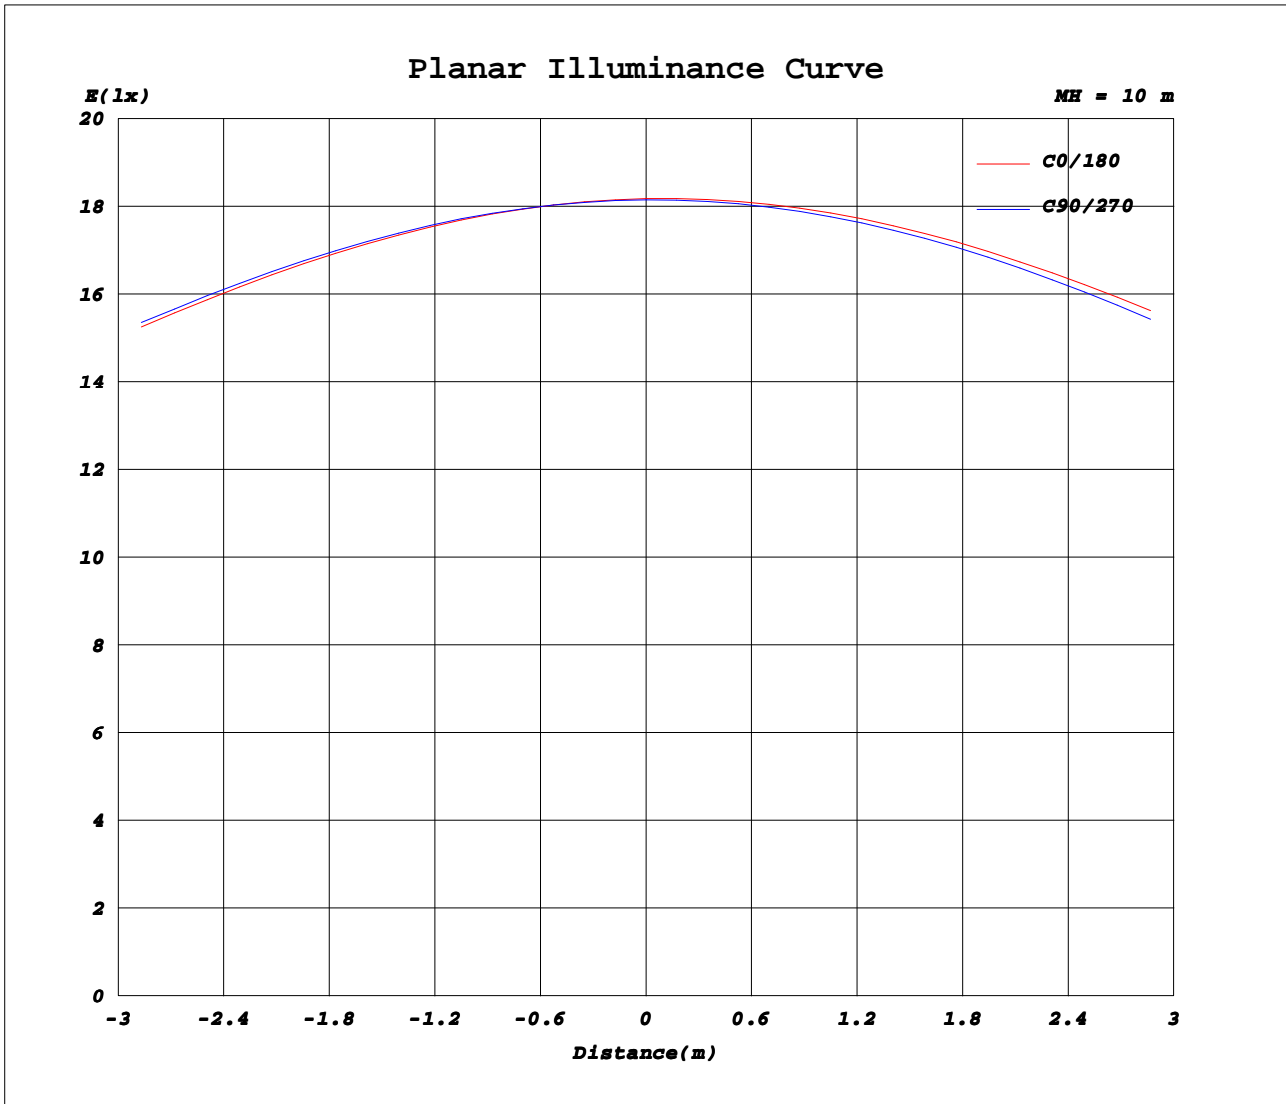

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.60V I:0.1870A P:39.500W PF:0.9580 Freq:50.00Hz		
Lamp Flux:5378.99x1 lm		
Name: NS63-595*595-40W	Type: LED	
MFR.: Lumega Group	DIM.: 595*595mm	
	SUR.: 550*550mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1818	1817	1816	1815	1815	1816	1818	1817	1816	1815	1815	1815							
5	1803	1803	1804	1805	1808	1812	1817	1815	1812	1809	1805	1803							
10	1773	1773	1775	1779	1785	1793	1800	1797	1792	1787	1780	1775							
15	1728	1729	1733	1738	1748	1759	1768	1765	1757	1747	1739	1733							
20	1668	1669	1674	1683	1694	1709	1720	1715	1704	1692	1681	1673							
25	1594	1596	1602	1612	1628	1645	1658	1651	1637	1622	1610	1600							
30	1507	1510	1517	1528	1547	1568	1583	1574	1557	1539	1525	1514							
35	1408	1412	1420	1432	1454	1478	1494	1483	1463	1443	1427	1415							
40	1297	1301	1310	1325	1349	1375	1393	1380	1358	1336	1318	1305							
45	1174	1180	1190	1205	1232	1263	1283	1267	1243	1221	1199	1183							
50	1044	1049	1060	1079	1106	1139	1163	1144	1118	1096	1071	1052							
55	903	909	921	941	971	1004	1028	1010	982	956	930	912							
60	755	760	774	797	828	863	888	868	838	811	784	764							
65	603	608	623	646	678	714	740	720	689	660	633	613							
70	449	454	469	492	525	562	588	568	536	504	479	460							
75	301	305	318	340	372	409	436	417	385	353	331	314							
80	166	172	183	199	231	266	291	275	246	217	197	180							
85	56.0	61.1	70.6	85.6	110	139	161	148	125	104	84.1	67.8							
90	10.6	11.5	11.0	11.7	20.8	37.3	53.1	45.5	32.6	21.6	14.9	11.3							
95	11.9	12.2	11.9	11.3	11.5	12.4	13.6	13.6	13.5	13.6	14.0	13.6							
100	13.2	13.1	12.8	12.4	12.3	13.3	14.8	14.9	14.8	14.9	15.4	14.9							
105	14.4	14.2	13.9	13.8	13.4	14.3	16.0	16.2	16.1	16.2	16.6	16.1							
110	15.5	15.3	15.2	15.0	14.6	15.4	17.1	17.3	17.3	17.4	17.8	17.2							
115	16.6	16.4	16.3	16.2	15.8	16.6	18.2	18.4	18.4	18.5	18.9	18.3							
120	17.7	17.5	17.4	17.4	16.9	17.7	19.3	19.5	19.5	19.7	20.0	19.4							
125	18.8	18.7	18.6	18.6	18.1	18.9	20.5	20.6	20.6	20.8	21.0	20.5							
130	20.0	19.9	19.8	19.8	19.3	20.0	21.6	21.7	21.7	21.9	22.1	21.5							
135	21.2	21.0	21.0	20.9	20.6	21.2	22.6	22.8	22.8	22.9	23.1	22.6							
140	22.3	22.2	22.2	22.1	21.8	22.4	23.8	23.9	23.9	24.0	24.1	23.7							
145	23.6	23.4	23.4	23.4	23.1	23.6	24.8	25.0	24.9	25.0	25.1	24.8							
150	24.9	24.7	24.7	24.7	24.4	24.8	25.8	26.0	26.0	26.0	26.1	25.8							
155	26.2	25.9	25.9	26.1	25.7	25.9	26.9	27.0	27.0	27.0	27.1	26.8							
160	27.2	26.9	27.0	27.1	26.7	27.0	27.8	27.8	27.9	28.0	27.9	27.6							
165	27.9	27.8	27.8	27.9	27.6	27.8	28.4	28.4	28.4	28.5	28.4	28.2							
170	28.5	28.5	28.5	28.6	28.3	28.4	28.8	28.8	28.8	28.9	28.8	28.7							
175	28.9	29.0	29.0	29.0	28.8	28.8	29.0	29.0	29.1	29.1	29.0	28.9							
180	29.0	29.1	29.1	29.1	29.0	29.0	29.0	29.1	29.1	29.1	29.0	29.0							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: