
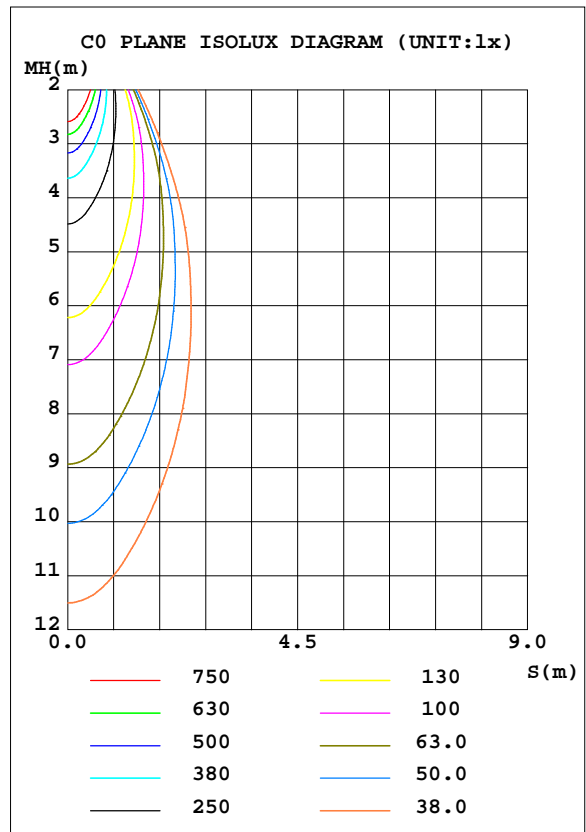


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.0880A P:19.100W PF:0.9780 Freq:50.00Hz		
Lamp Flux:2063.4lx1 lm		
Name: NS72-18W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.03 lm/W			
MODEL		I _{max} (cd)	5045	S/MH(C0/180)	0.54
NOMINAL POWER(W)	18	LOR(%)	100.0	S/MH(C90/270)	0.56
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2063.4	η UP, DN(C0-180)	1.3, 50.3
NOMINAL FLUX(lm)	2063.41	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.6, 46.8
LAMPS INSIDE	1	η up(%)	2.9	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down(%)	97.1	CIBSE SHR MAX	0.60

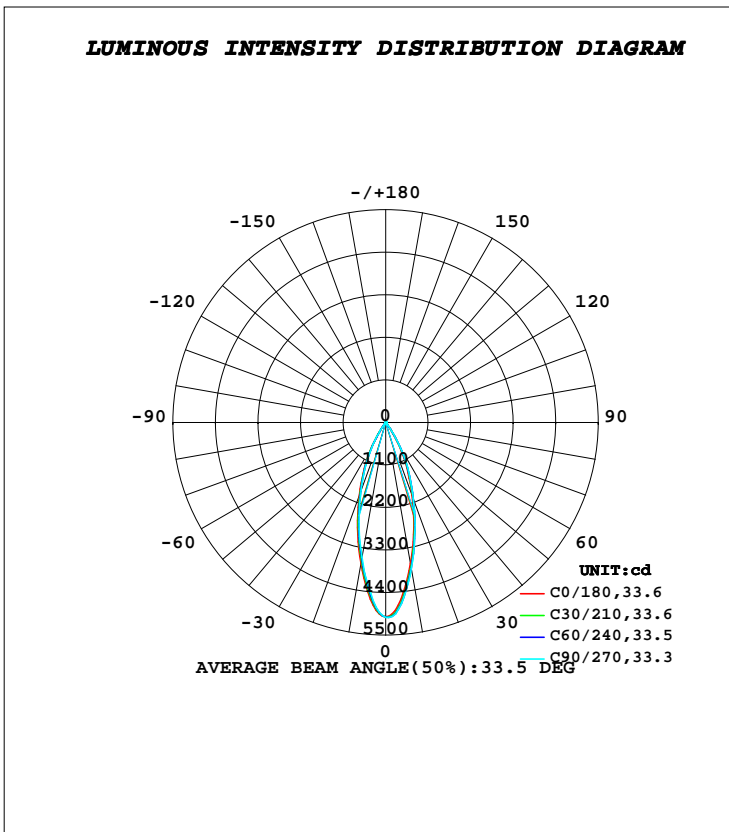

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	3704	3802	3833	3802	3704	3607	3541	3607	0- 10	408.8	408.8	19.8,19.8
20	1995	2074	2101	2074	1995	1921	1871	1921	10- 20	775.1	1184	57.4,57.4
30	712.9	782.5	808.5	782.5	712.9	674.9	647.1	674.9	20- 30	601.7	1786	86.5,86.5
40	46.06	52.08	54.53	52.08	46.06	44.57	43.26	44.57	30- 40	175.2	1961	95,95
50	15.65	15.30	14.95	15.30	15.65	15.77	15.66	15.77	40- 50	19.04	1980	95.9,95.9
60	7.950	7.768	7.618	7.768	7.950	8.232	8.314	8.232	50- 60	9.951	1990	96.4,96.4
70	4.996	4.836	4.671	4.836	4.996	5.293	5.356	5.293	60- 70	6.836	1997	96.8,96.8
80	2.925	2.339	1.957	2.339	2.925	3.808	4.160	3.808	70- 80	3.949	2001	97,97
90	2.074	1.216	0.6817	1.216	2.074	3.132	3.556	3.132	80- 90	2.689	2003	97.1,97.1
100	2.868	1.890	1.285	1.890	2.868	4.010	4.465	4.010	90-100	2.741	2006	97.2,97.2
110	4.226	3.208	2.591	3.208	4.226	5.344	5.794	5.344	100-110	3.712	2010	97.4,97.4
120	6.605	5.535	4.908	5.535	6.605	7.703	8.160	7.703	110-120	5.279	2015	97.7,97.7
130	10.37	9.340	8.760	9.340	10.37	11.31	11.72	11.31	120-130	7.448	2022	98,98
140	15.74	14.88	14.43	14.88	15.74	16.54	16.92	16.54	130-140	9.907	2032	98.5,98.5
150	21.50	20.97	20.70	20.97	21.50	22.21	22.57	22.21	140-150	11.69	2044	99.1,99.1
160	23.99	23.84	23.76	23.84	23.99	24.72	25.08	24.72	150-160	10.77	2055	99.6,99.6
170	21.49	21.57	21.57	21.57	21.49	21.77	21.86	21.77	160-170	6.626	2061	99.9,99.9
180	19.77	19.70	19.66	19.70	19.77	19.68	19.62	19.68	170-180	1.976	2063	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.0880A P:19.100W PF:0.9780 Freq:50.00Hz		
Lamp Flux:2063.41x1 lm		
Name: NS72-18W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

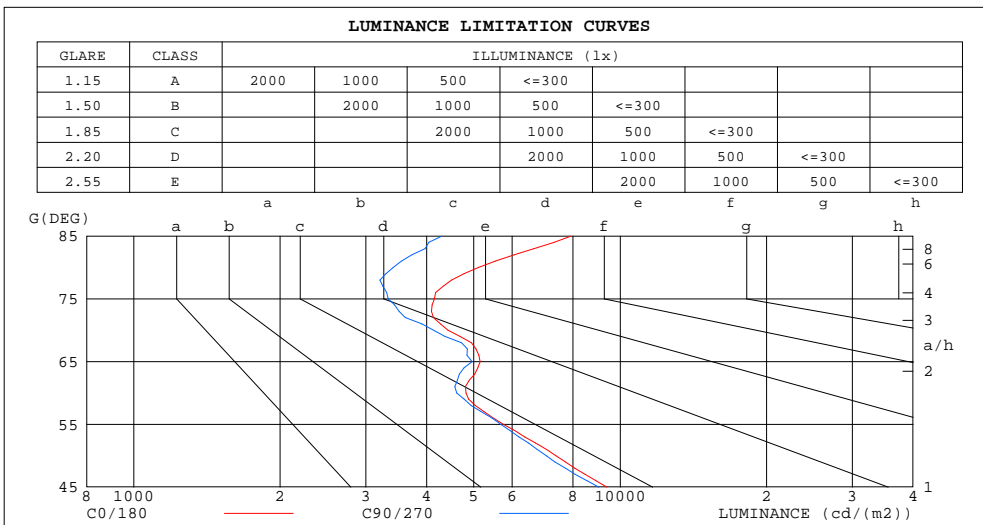

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	7914	4299
80	5104	3415
75	4152	3336
70	4426	4138
65	5154	4959
60	4818	4617
55	5756	5683
50	7377	7047
45	9385	9046


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.0880A P:19.100W PF:0.9780 Freq:50.00Hz		
Lamp Flux:2063.41x1 lm		
Name: NS72-18W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.04	1.02	1.01	.99	.99	.98	.96	.95	.94	.92
2.0	1.04	1.01	.98	1.03	.99	.97	.99	.96	.94	.96	.94	.92	.92	.91	.89	.88
3.0	.99	.94	.91	.97	.93	.90	.94	.91	.88	.91	.89	.87	.89	.87	.85	.83
4.0	.94	.89	.85	.92	.88	.85	.90	.86	.83	.88	.85	.82	.86	.83	.81	.79
5.0	.89	.84	.80	.88	.83	.80	.86	.82	.79	.84	.81	.78	.82	.79	.77	.76
6.0	.85	.80	.76	.84	.79	.76	.82	.78	.75	.81	.77	.74	.79	.76	.74	.72
7.0	.81	.76	.72	.80	.75	.72	.79	.75	.71	.77	.74	.71	.76	.73	.70	.69
8.0	.77	.72	.69	.77	.72	.69	.76	.71	.68	.74	.71	.68	.73	.70	.67	.66
9.0	.74	.69	.66	.74	.69	.66	.73	.68	.65	.72	.68	.65	.71	.67	.65	.63
10.0	.71	.66	.63	.71	.66	.63	.70	.66	.63	.69	.65	.62	.68	.65	.62	.61

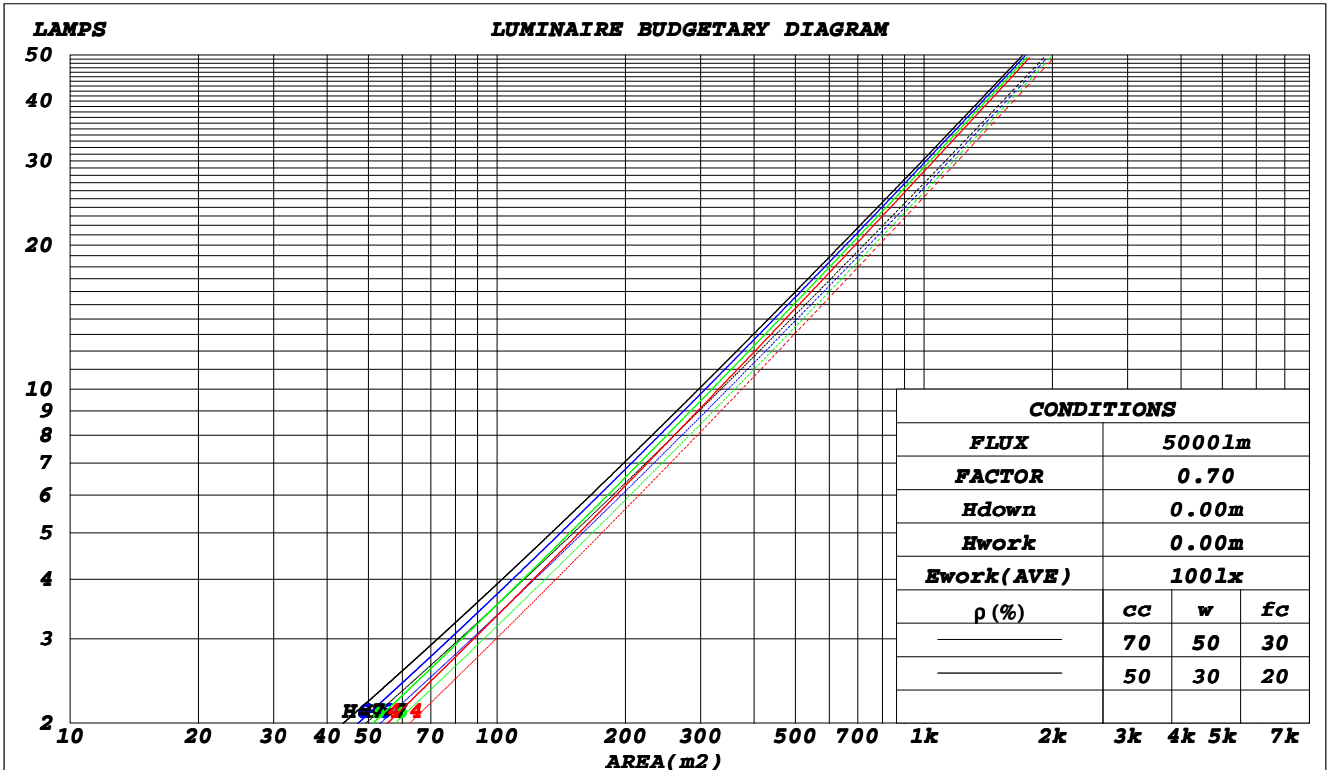

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.0880A P:19.100W PF:0.9780 Freq:50.00Hz		
Lamp Flux:2063.4lx1 lm		
Name: NS72-18W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.160	.091	.029	.153	.087	.028	.138	.079	.025	.125	.072	.023	.113	.066	.021	
2.0	.150	.082	.025	.144	.079	.024	.132	.073	.023	.121	.068	.021	.111	.063	.020	
3.0	.141	.075	.023	.136	.073	.022	.126	.068	.021	.116	.064	.020	.107	.059	.018	
4.0	.133	.069	.020	.129	.067	.020	.120	.064	.019	.112	.060	.018	.104	.056	.017	
5.0	.126	.064	.019	.122	.063	.018	.115	.060	.018	.107	.057	.017	.101	.054	.016	
6.0	.120	.060	.017	.117	.059	.017	.110	.056	.016	.103	.054	.016	.097	.051	.015	
7.0	.115	.057	.016	.111	.055	.016	.105	.053	.015	.100	.051	.015	.094	.049	.014	
8.0	.110	.054	.015	.107	.053	.015	.101	.051	.014	.096	.049	.014	.091	.047	.014	
9.0	.105	.051	.014	.102	.050	.014	.097	.048	.014	.093	.047	.013	.089	.045	.013	
10.0	.101	.048	.013	.098	.048	.013	.094	.046	.013	.090	.045	.013	.086	.043	.012	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.213	.213	.213	.182	.182	.182	.124	.124	.124	.071	.071	.071	.023	.023	.023	
1.0	.192	.180	.169	.165	.154	.145	.113	.106	.100	.065	.061	.058	.021	.020	.019	
2.0	.176	.155	.138	.151	.134	.119	.103	.092	.083	.060	.054	.049	.019	.017	.016	
3.0	.162	.136	.115	.139	.117	.100	.096	.082	.070	.055	.048	.041	.018	.015	.014	
4.0	.151	.121	.098	.130	.105	.085	.089	.073	.060	.052	.043	.036	.017	.014	.012	
5.0	.142	.109	.085	.122	.095	.074	.084	.066	.053	.049	.039	.031	.016	.013	.010	
6.0	.133	.100	.076	.115	.086	.066	.079	.060	.047	.046	.036	.028	.015	.012	.009	
7.0	.127	.092	.068	.109	.080	.059	.075	.056	.042	.044	.033	.025	.014	.011	.008	
8.0	.121	.086	.061	.104	.074	.054	.072	.052	.038	.042	.031	.023	.014	.010	.007	
9.0	.115	.080	.056	.099	.070	.049	.069	.049	.035	.040	.029	.021	.013	.009	.007	
10.0	.111	.076	.052	.095	.066	.046	.066	.046	.032	.039	.027	.019	.013	.009	.006	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.0880A P:19.100W PF:0.9780 Freq:50.00Hz Lamp Flux:2063.4lx1 lm		
Name: NS72-18W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.6	17.4	16.9	17.6	17.8	17.2	18.0	17.5	18.2	18.4
3H	16.6	17.3	16.9	17.5	17.8	17.2	17.9	17.4	18.1	18.4
4H	16.5	17.2	16.8	17.5	17.7	17.1	17.8	17.4	18.0	18.3
6H	16.5	17.1	16.8	17.4	17.7	17.0	17.7	17.4	18.0	18.3
8H	16.5	17.1	16.9	17.4	17.7	17.0	17.6	17.4	17.9	18.2
12H	16.5	17.1	16.9	17.4	17.8	17.0	17.6	17.3	17.9	18.2
4H 2H	16.4	17.1	16.7	17.4	17.6	17.0	17.7	17.3	18.0	18.2
3H	16.4	17.0	16.7	17.3	17.6	16.9	17.5	17.3	17.9	18.2
4H	16.4	16.9	16.7	17.2	17.6	16.9	17.4	17.3	17.8	18.1
6H	16.4	16.8	16.8	17.2	17.6	16.8	17.3	17.3	17.7	18.1
8H	16.4	16.8	16.8	17.2	17.7	16.8	17.3	17.3	17.7	18.1
12H	16.5	16.9	16.9	17.3	17.7	16.8	17.2	17.3	17.6	18.1
8H 4H	16.2	16.7	16.7	17.1	17.5	16.8	17.2	17.2	17.6	18.0
6H	16.3	16.6	16.8	17.1	17.6	16.7	17.1	17.2	17.5	18.0
8H	16.4	16.7	16.8	17.1	17.6	16.7	17.1	17.2	17.5	18.0
12H	16.5	16.7	17.0	17.2	17.8	16.7	17.0	17.3	17.5	18.0
12H 4H	16.2	16.6	16.6	17.0	17.5	16.7	17.1	17.2	17.5	18.0
6H	16.2	16.6	16.7	17.0	17.5	16.7	17.0	17.2	17.5	18.0
8H	16.3	16.6	16.8	17.1	17.6	16.7	17.0	17.2	17.5	18.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.0 / - 2.0					+ 4.0 / - 2.9				
1.5H	+ 5.0 / - 1.7					+ 6.3 / - 2.6				
2.0H	+ 0.9 / - 0.5					+ 1.0 / - 0.7				

CIE Pub.117, 2063 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.5)
Area: 0.0033 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.0880A P:19.100W PF:0.9780 Freq:50.00Hz Lamp Flux:2063.41x1 lm		
Name: NS72-18W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	83	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	86	93	89	86	82
1.00	100	94	91	99	94	90	97	93	90	86
1.25	103	98	95	102	98	94	100	96	93	89
1.50	106	101	98	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	103	101	98	93
2.50	110	106	103	108	105	102	104	102	100	93
3.00	111	108	105	109	106	104	105	103	101	94
4.00	113	111	108	111	109	107	107	105	104	96
5.00	115	112	111	112	110	109	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.0880A P:19.100W PF:0.9780 Freq:50.00Hz		
Lamp Flux:2063.41x1 lm		
Name: NS72-18W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

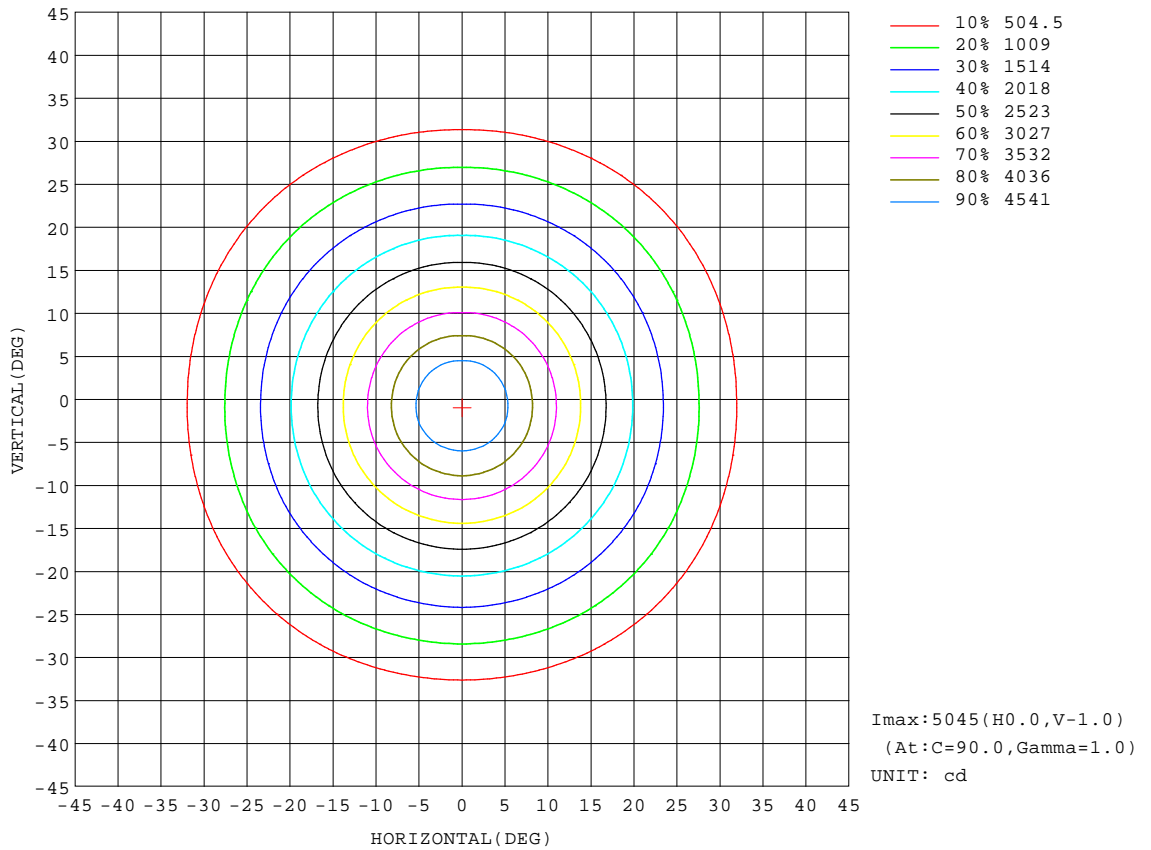


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.0880A P:19.100W PF:0.9780 Freq:50.00Hz		
Lamp Flux:2063.4lx1 lm		
Name: NS72-18W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

Flux out:951.5 lm

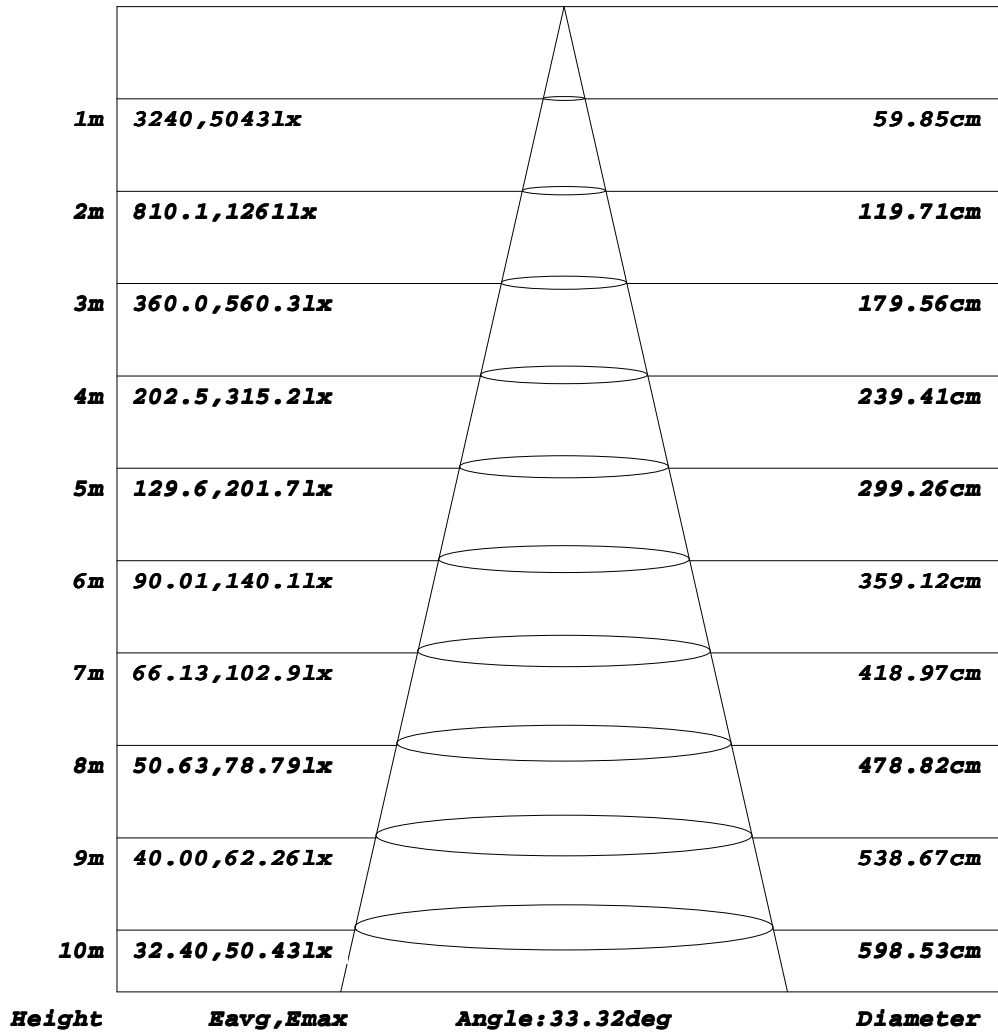


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.0880A P:19.100W PF:0.9780 Freq:50.00Hz		
Lamp Flux:2063.41x1 lm		
Name: NS72-18W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

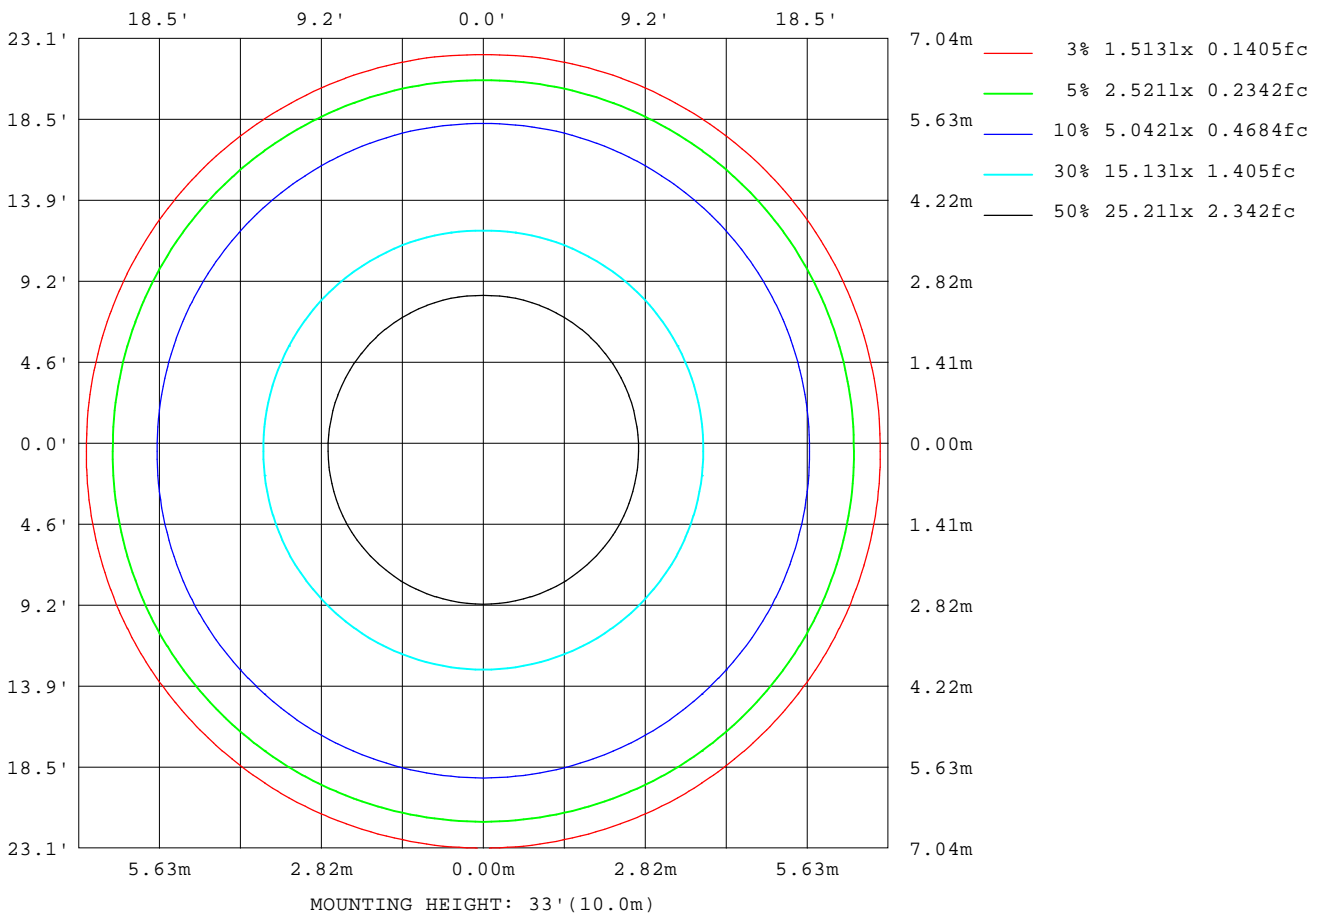

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

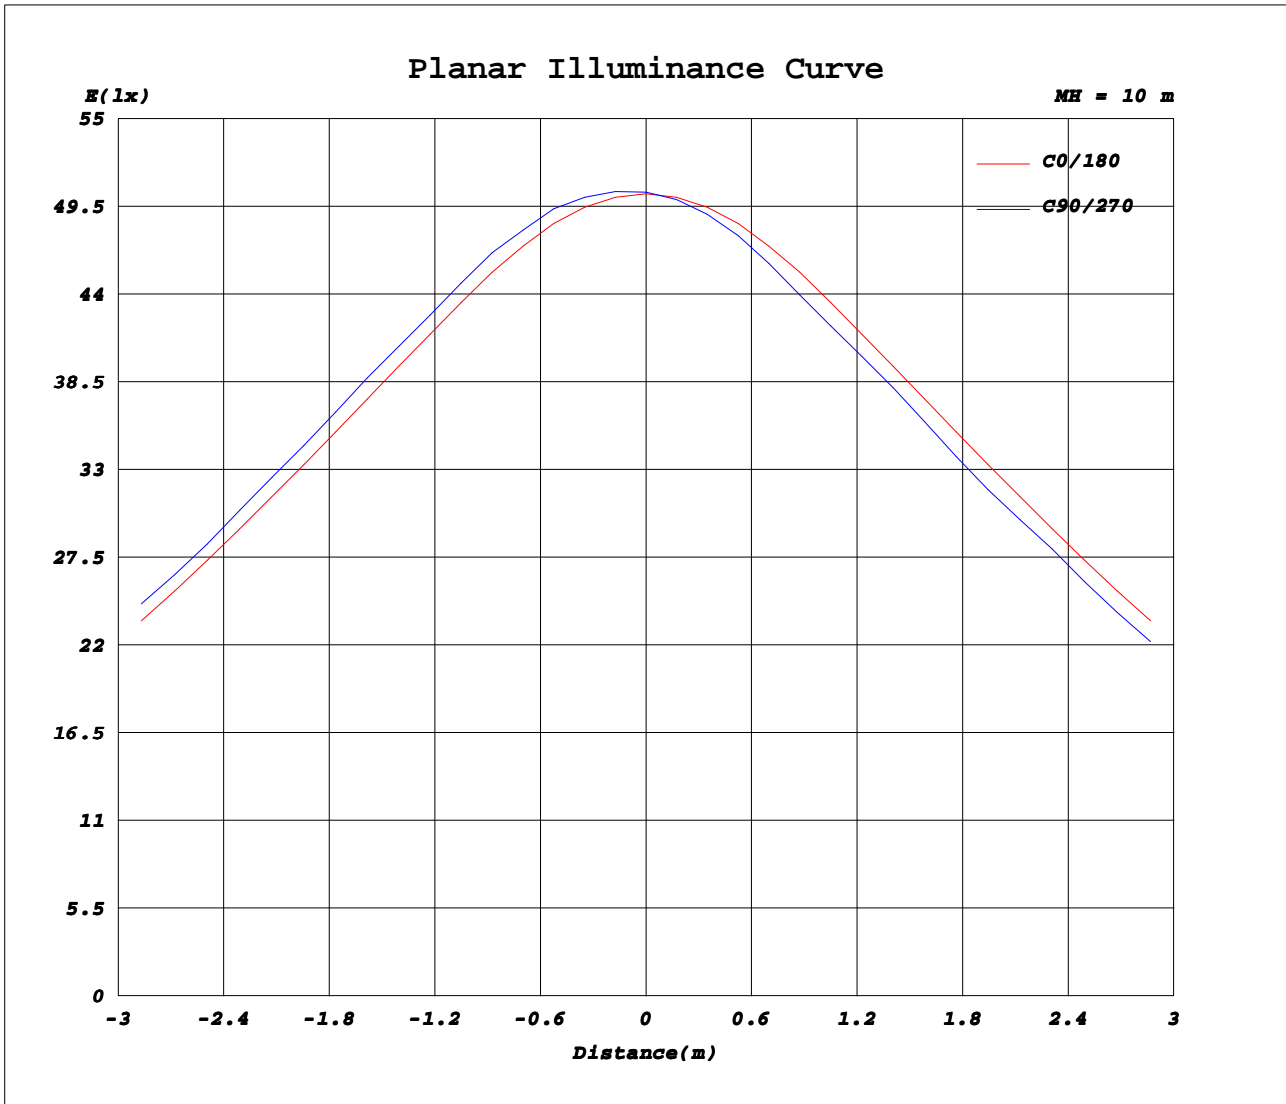

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.0880A P:19.100W PF:0.9780 Freq:50.00Hz Lamp Flux:2063.4lx1 lm		
Name: NS72-18W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	5028	5033	5037	5039	5037	5033	5028	5033	5037	5039	5037	5033							
5	4591	4663	4703	4714	4703	4663	4591	4531	4479	4446	4479	4531							
10	3704	3781	3823	3833	3823	3781	3704	3636	3577	3541	3577	3636							
15	2818	2885	2922	2931	2922	2885	2818	2755	2701	2668	2701	2755							
20	1995	2056	2091	2101	2091	2056	1995	1943	1898	1871	1898	1943							
25	1317	1373	1407	1419	1407	1373	1317	1287	1260	1245	1260	1287							
30	713	767	798	809	798	767	713	687	663	647	663	687							
35	242	269	284	288	284	269	242	226	211	201	211	226							
40	46.1	50.7	53.5	54.5	53.5	50.7	46.1	45.1	44.0	43.3	44.0	45.1							
45	21.9	21.7	21.4	21.1	21.4	21.7	21.9	22.0	21.9	21.7	21.9	22.0							
50	15.6	15.4	15.2	14.9	15.2	15.4	15.6	15.8	15.8	15.7	15.8	15.8							
55	10.9	10.9	10.8	10.8	10.8	10.9	10.9	10.9	10.9	10.8	10.9	10.9							
60	7.95	7.83	7.71	7.62	7.71	7.83	7.95	8.17	8.29	8.31	8.29	8.17							
65	7.19	7.11	7.00	6.92	7.00	7.11	7.19	7.41	7.52	7.54	7.52	7.41							
70	5.00	4.90	4.77	4.67	4.77	4.90	5.00	5.24	5.35	5.36	5.35	5.24							
75	3.55	3.27	3.01	2.85	3.01	3.27	3.55	4.00	4.27	4.34	4.27	4.00							
80	2.92	2.51	2.16	1.96	2.16	2.51	2.92	3.60	4.01	4.16	4.01	3.60							
85	2.28	1.85	1.47	1.24	1.47	1.85	2.28	2.98	3.39	3.52	3.39	2.98							
90	2.07	1.46	0.97	0.68	0.97	1.46	2.07	2.88	3.38	3.56	3.38	2.88							
95	2.44	1.78	1.25	0.94	1.25	1.78	2.44	3.29	3.81	3.99	3.81	3.29							
100	2.87	2.17	1.61	1.28	1.61	2.17	2.87	3.74	4.28	4.47	4.28	3.74							
105	3.44	2.71	2.13	1.79	2.13	2.71	3.44	4.31	4.84	5.03	4.84	4.31							
110	4.23	3.50	2.92	2.59	2.92	3.50	4.23	5.08	5.61	5.79	5.61	5.08							
115	5.27	4.53	3.94	3.62	3.94	4.53	5.27	6.11	6.63	6.82	6.63	6.11							
120	6.60	5.84	5.23	4.91	5.23	5.84	6.60	7.44	7.97	8.16	7.97	7.44							
125	8.29	7.53	6.94	6.63	6.94	7.53	8.29	9.09	9.60	9.79	9.60	9.09							
130	10.4	9.62	9.06	8.76	9.06	9.62	10.4	11.1	11.5	11.7	11.5	11.1							
135	12.8	12.1	11.6	11.4	11.6	12.1	12.8	13.5	13.9	14.1	13.9	13.5							
140	15.7	15.1	14.7	14.4	14.7	15.1	15.7	16.3	16.7	16.9	16.7	16.3							
145	18.8	18.2	17.8	17.6	17.8	18.2	18.8	19.3	19.7	19.9	19.7	19.3							
150	21.5	21.1	20.8	20.7	20.8	21.1	21.5	22.0	22.4	22.6	22.4	22.0							
155	23.3	23.1	23.0	22.9	23.0	23.1	23.3	23.9	24.4	24.6	24.4	23.9							
160	24.0	23.9	23.8	23.8	23.8	23.9	24.0	24.5	24.9	25.1	24.9	24.5							
165	23.2	23.1	23.1	23.0	23.1	23.1	23.2	23.6	23.9	24.0	23.9	23.6							
170	21.5	21.6	21.6	21.6	21.6	21.6	21.5	21.7	21.8	21.9	21.8	21.7							
175	20.2	20.2	20.1	20.1	20.1	20.2	20.2	20.2	20.2	20.2	20.2	20.2							
180	19.8	19.7	19.7	19.7	19.7	19.7	19.8	19.7	19.7	19.6	19.7	19.7							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: