
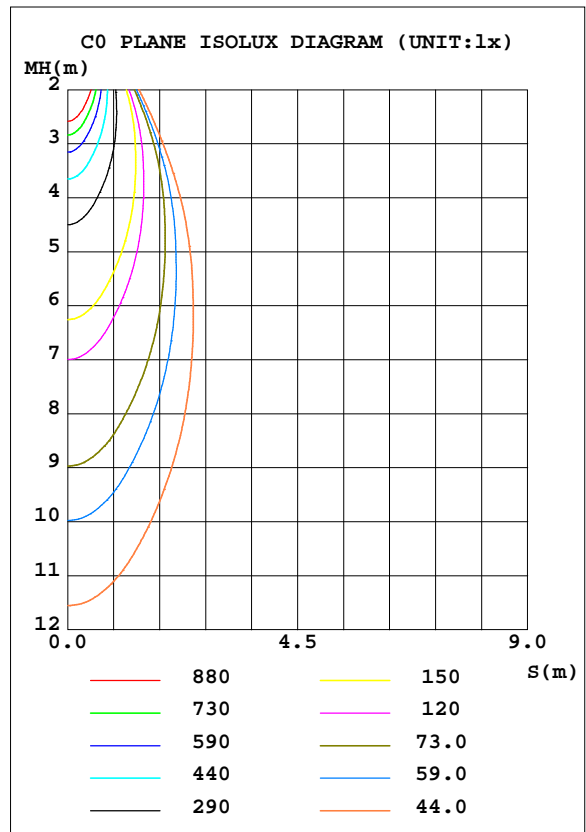


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.60V I:0.1090A P:23.100W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2457.14x1 lm		
Name: NS72-25W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.37 lm/W			
MODEL		I _{max} (cd)	5872	S/MH(C0/180)	0.55
NOMINAL POWER(W)	25	LOR(%)	100.0	S/MH(C90/270)	0.54
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2457.1	η UP, DN(C0-180)	1.4, 47.2
NOMINAL FLUX(lm)	2457.14	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.5, 49.9
LAMPS INSIDE	1	η up(%)	2.9	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down(%)	97.1	CIBSE SHR MAX	0.60

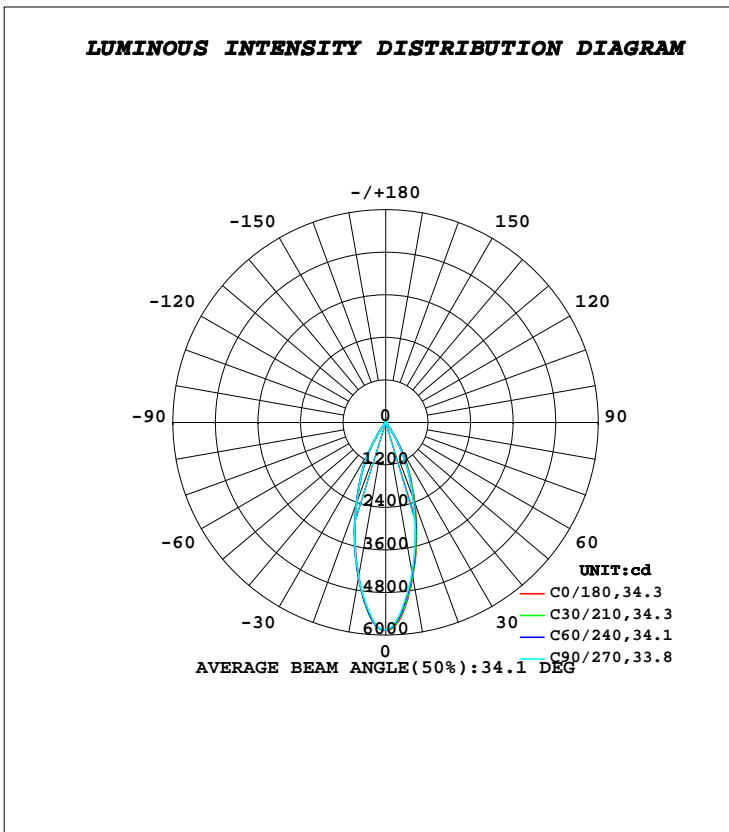

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	4412	4356	4285	4356	4412	4437	4405	4437	0- 10	481.3	481.3	19.6,19.6
20	2396	2315	2239	2315	2396	2425	2404	2425	10- 20	921.9	1403	57.1,57.1
30	894.1	818.5	751.9	818.5	894.1	952.8	953.4	952.8	20- 30	716.1	2119	86.3,86.3
40	64.42	55.30	47.69	55.30	64.42	66.90	65.09	66.90	30- 40	216.2	2336	95.1,95.1
50	18.19	16.99	16.09	16.99	18.19	19.33	19.59	19.33	40- 50	23.22	2359	96,96
60	9.088	8.369	7.899	8.369	9.088	9.755	9.978	9.755	50- 60	11.54	2370	96.5,96.5
70	5.794	5.065	4.543	5.065	5.794	6.587	6.826	6.587	60- 70	7.679	2378	96.8,96.8
80	3.336	2.553	2.043	2.553	3.336	4.418	4.841	4.418	70- 80	4.543	2383	97,97
90	2.452	1.489	0.8868	1.489	2.452	3.593	4.043	3.593	80- 90	3.123	2386	97.1,97.1
100	3.428	2.352	1.682	2.352	3.428	4.624	5.090	4.624	90-100	3.227	2389	97.2,97.2
110	5.057	4.047	3.429	4.047	5.057	6.137	6.565	6.137	100-110	4.415	2393	97.4,97.4
120	7.898	6.958	6.404	6.958	7.898	8.806	9.177	8.806	110-120	6.294	2400	97.7,97.7
130	12.39	11.67	11.27	11.67	12.39	12.95	13.20	12.95	120-130	8.874	2408	98,98
140	18.75	18.38	18.22	18.38	18.75	18.96	19.10	18.96	130-140	11.81	2420	98.5,98.5
150	25.54	25.45	25.45	25.45	25.54	25.75	25.90	25.75	140-150	13.88	2434	99.1,99.1
160	28.40	28.46	28.49	28.46	28.40	29.15	29.53	29.15	150-160	12.77	2447	99.6,99.6
170	25.50	25.62	25.61	25.62	25.50	26.19	26.48	26.19	160-170	7.878	2455	99.9,99.9
180	23.72	23.86	23.94	23.86	23.72	23.81	23.87	23.81	170-180	2.371	2457	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.60V I:0.1090A P:23.100W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2457.14x1 lm		
Name: NS72-25W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

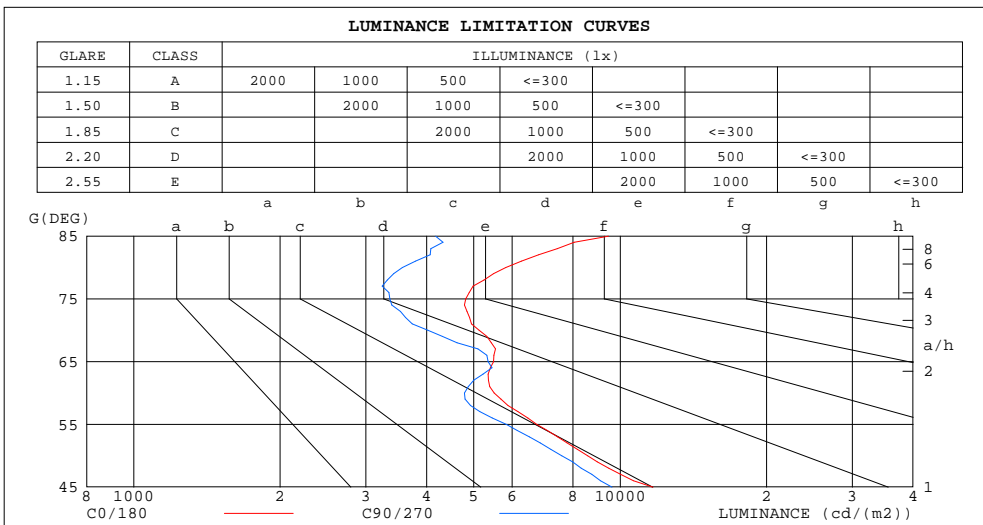

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9456	4172
80	5821	3566
75	4813	3364
70	5134	4025
65	5494	5352
60	5508	4788
55	6743	5839
50	8574	7586
45	11684	9617


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.60V I:0.1090A P:23.100W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2457.14x1 lm		
Name: NS72-25W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.04	1.02	1.01	.00	.99	.98	.96	.95	.94	.92
2.0	1.04	1.01	.98	1.03	.99	.97	.99	.96	.94	.96	.93	.92	.92	.91	.89	.88
3.0	.99	.94	.91	.97	.93	.90	.94	.91	.88	.91	.89	.87	.89	.87	.85	.83
4.0	.94	.89	.85	.92	.88	.85	.90	.86	.83	.88	.85	.82	.85	.83	.81	.79
5.0	.89	.84	.80	.88	.83	.80	.86	.82	.79	.84	.81	.78	.82	.79	.77	.76
6.0	.85	.80	.76	.84	.79	.76	.82	.78	.75	.80	.77	.74	.79	.76	.73	.72
7.0	.81	.76	.72	.80	.75	.72	.79	.74	.71	.77	.74	.71	.76	.73	.70	.69
8.0	.77	.72	.69	.77	.72	.69	.75	.71	.68	.74	.70	.68	.73	.70	.67	.66
9.0	.74	.69	.66	.73	.69	.66	.72	.68	.65	.71	.68	.65	.70	.67	.64	.63
10.0	.71	.66	.63	.71	.66	.63	.70	.65	.62	.69	.65	.62	.68	.64	.62	.61

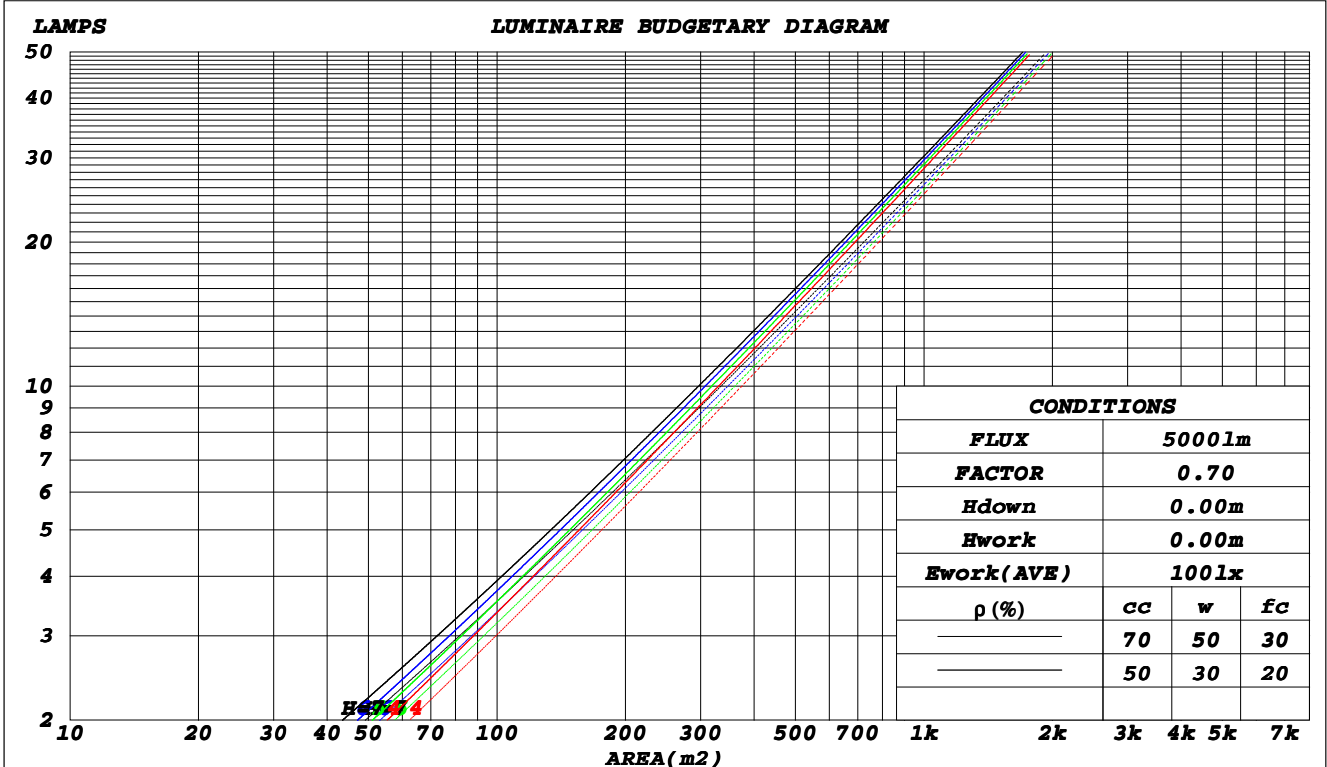

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.60V I:0.1090A P:23.100W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2457.14x1 lm		
Name: NS72-25W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.160	.091	.029	.153	.087	.028	.139	.080	.025	.126	.072	.023	.114	.066	.021	
2.0	.150	.082	.025	.144	.079	.024	.132	.073	.023	.121	.068	.021	.111	.063	.020	
3.0	.141	.075	.023	.136	.073	.022	.126	.068	.021	.116	.064	.020	.108	.060	.018	
4.0	.134	.069	.020	.129	.067	.020	.120	.064	.019	.112	.060	.018	.104	.057	.017	
5.0	.127	.065	.019	.123	.063	.018	.115	.060	.018	.108	.057	.017	.101	.054	.016	
6.0	.120	.060	.017	.117	.059	.017	.110	.056	.016	.104	.054	.016	.098	.051	.015	
7.0	.115	.057	.016	.112	.056	.016	.106	.053	.015	.100	.051	.015	.095	.049	.014	
8.0	.110	.054	.015	.107	.053	.015	.102	.051	.014	.096	.049	.014	.092	.047	.014	
9.0	.105	.051	.014	.103	.050	.014	.098	.048	.014	.093	.047	.013	.089	.045	.013	
10.0	.101	.048	.013	.099	.048	.013	.094	.046	.013	.090	.045	.013	.086	.043	.012	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.213	.213	.213	.182	.182	.182	.124	.124	.124	.071	.071	.071	.023	.023	.023	
1.0	.192	.180	.169	.165	.154	.145	.113	.106	.100	.065	.061	.058	.021	.020	.019	
2.0	.176	.155	.138	.151	.134	.119	.103	.092	.083	.060	.054	.049	.019	.017	.016	
3.0	.162	.136	.115	.139	.117	.100	.096	.082	.070	.055	.048	.041	.018	.015	.014	
4.0	.151	.121	.098	.130	.105	.085	.089	.073	.060	.052	.043	.036	.017	.014	.012	
5.0	.142	.109	.085	.122	.095	.074	.084	.066	.052	.049	.039	.031	.016	.013	.010	
6.0	.134	.100	.075	.115	.086	.066	.079	.060	.046	.046	.036	.028	.015	.012	.009	
7.0	.127	.092	.068	.109	.080	.059	.075	.056	.042	.044	.033	.025	.014	.011	.008	
8.0	.121	.085	.061	.104	.074	.053	.072	.052	.038	.042	.031	.023	.014	.010	.007	
9.0	.115	.080	.056	.099	.070	.049	.069	.049	.035	.040	.029	.021	.013	.009	.007	
10.0	.111	.076	.052	.095	.066	.046	.066	.046	.032	.039	.027	.019	.013	.009	.006	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.60V I:0.1090A P:23.100W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2457.14x1 lm		
Name: NS72-25W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.0	17.8	17.3	18.0	18.2	15.9	16.7	16.1	16.9	17.1
3H	17.0	17.7	17.3	17.9	18.2	15.8	16.5	16.1	16.8	17.0
4H	16.9	17.6	17.2	17.9	18.1	15.8	16.5	16.1	16.7	17.0
6H	16.9	17.5	17.2	17.8	18.1	15.7	16.4	16.1	16.7	16.9
8H	16.9	17.5	17.3	17.8	18.1	15.7	16.3	16.0	16.6	16.9
12H	16.9	17.5	17.3	17.8	18.2	15.7	16.3	16.0	16.6	16.9
4H 2H	16.8	17.5	17.1	17.8	18.0	15.7	16.4	16.0	16.6	16.9
3H	16.8	17.4	17.1	17.7	18.0	15.6	16.2	16.0	16.6	16.9
4H	16.7	17.3	17.1	17.6	18.0	15.6	16.2	16.0	16.5	16.9
6H	16.8	17.2	17.2	17.6	18.0	15.6	16.1	16.0	16.4	16.8
8H	16.8	17.2	17.2	17.6	18.0	15.6	16.0	16.0	16.4	16.8
12H	16.8	17.2	17.3	17.7	18.1	15.6	16.0	16.0	16.4	16.8
8H 4H	16.6	17.1	17.1	17.5	17.9	15.5	15.9	15.9	16.3	16.8
6H	16.7	17.0	17.1	17.5	17.9	15.5	15.9	16.0	16.3	16.8
8H	16.7	17.0	17.2	17.5	18.0	15.5	15.8	16.0	16.3	16.8
12H	16.8	17.1	17.3	17.6	18.1	15.5	15.8	16.1	16.3	16.8
12H 4H	16.6	17.0	17.0	17.4	17.8	15.5	15.9	15.9	16.3	16.7
6H	16.6	16.9	17.1	17.4	17.9	15.5	15.8	16.0	16.3	16.8
8H	16.7	17.0	17.2	17.5	18.0	15.5	15.8	16.0	16.3	16.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.5 / - 2.6					+ 2.6 / - 2.1				
1.5H	+ 5.8 / - 2.4					+ 4.4 / - 1.8				
2.0H	+ 1.2 / - 0.6					+ 1.0 / - 0.7				

CIE Pub.117, 2457 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.1)
 Area: 0.0033 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.60V I:0.1090A P:23.100W PF:0.9570 Freq:50.00Hz Lamp Flux:2457.14x1 lm		
Name: NS72-25W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	83	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	86	93	89	86	82
1.00	100	94	91	99	94	90	97	93	90	86
1.25	103	98	95	102	98	94	100	96	93	89
1.50	106	101	98	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	103	101	98	93
2.50	110	106	103	108	105	102	104	102	100	93
3.00	111	108	105	109	106	104	105	103	101	94
4.00	113	111	108	111	109	107	107	105	104	96
5.00	115	112	111	112	110	109	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.60V I:0.1090A P:23.100W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2457.14x1 lm		
Name: NS72-25W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

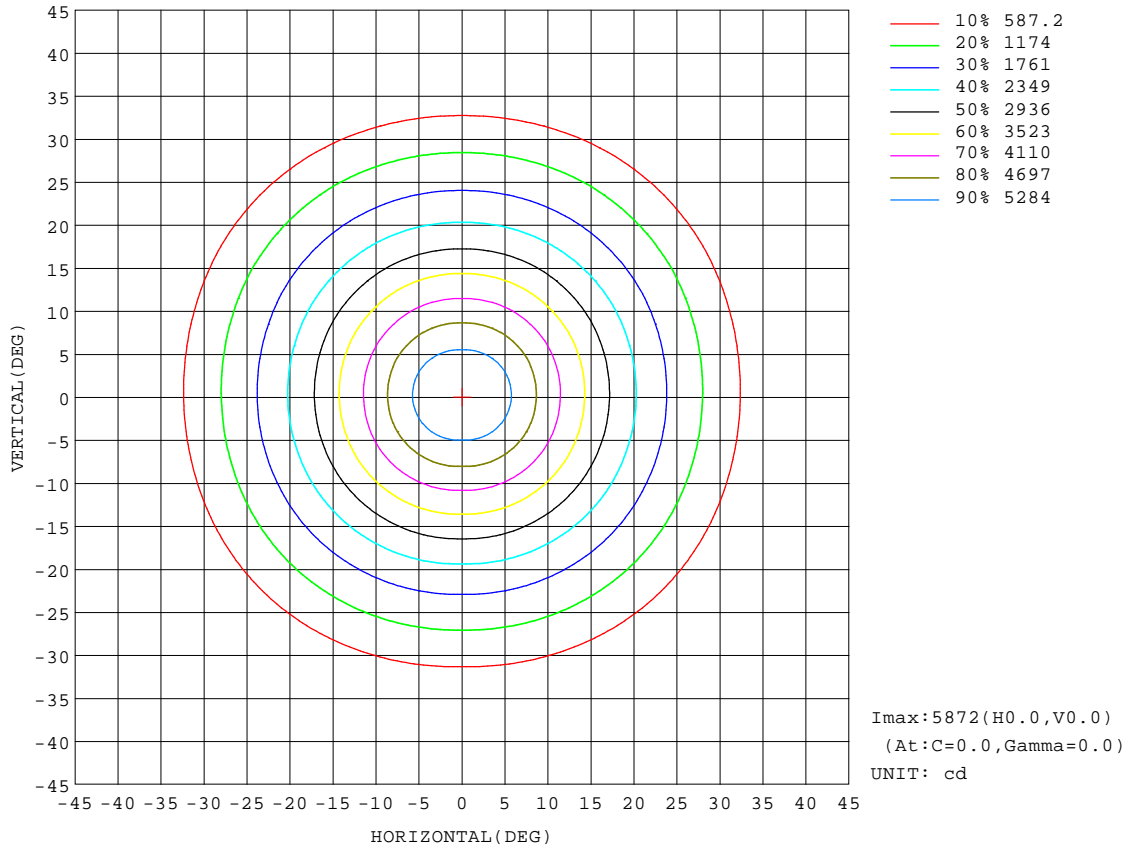


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.60V I:0.1090A P:23.100W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2457.14x1 lm		
Name: NS72-25W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

Flux out:1127 lm

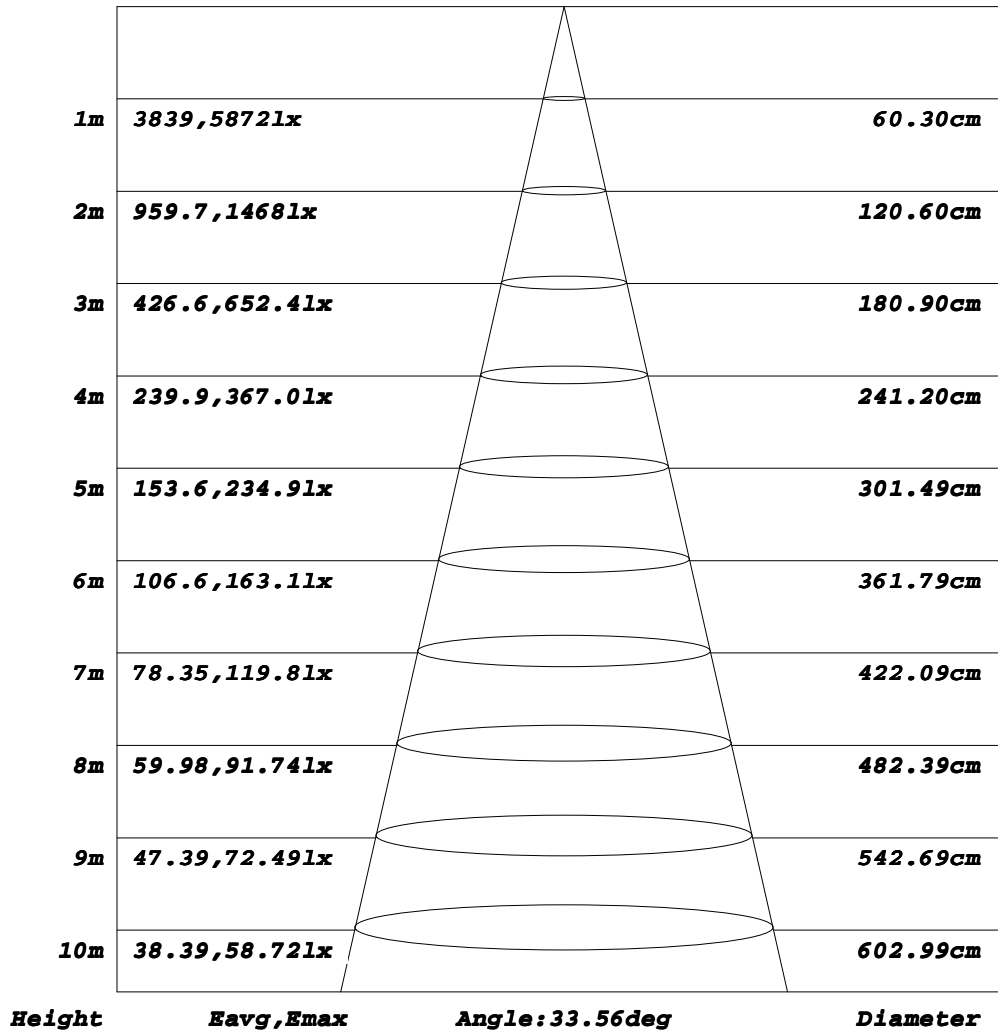


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.60V I:0.1090A P:23.100W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2457.14x1 lm		
Name: NS72-25W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

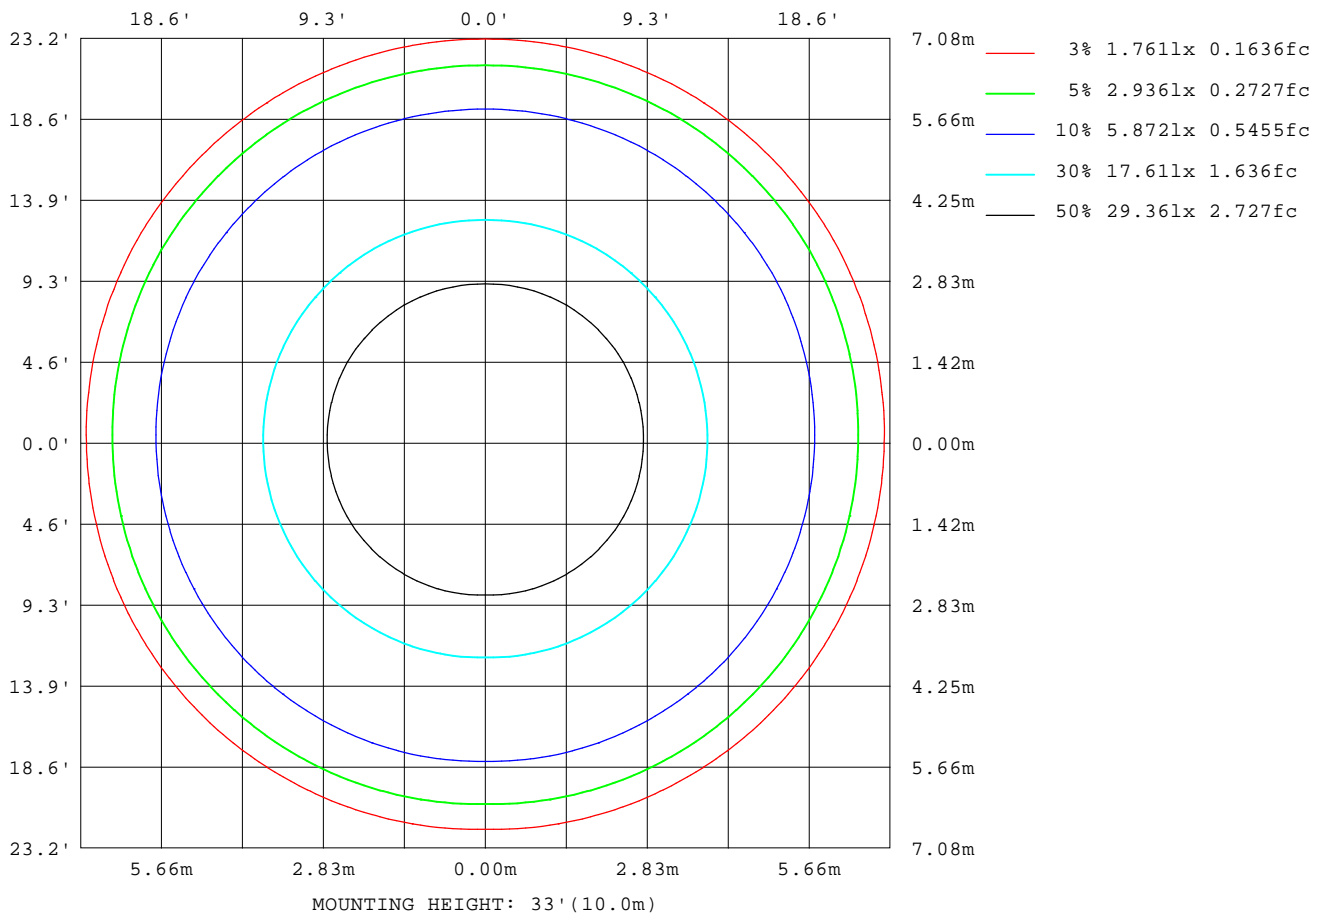

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

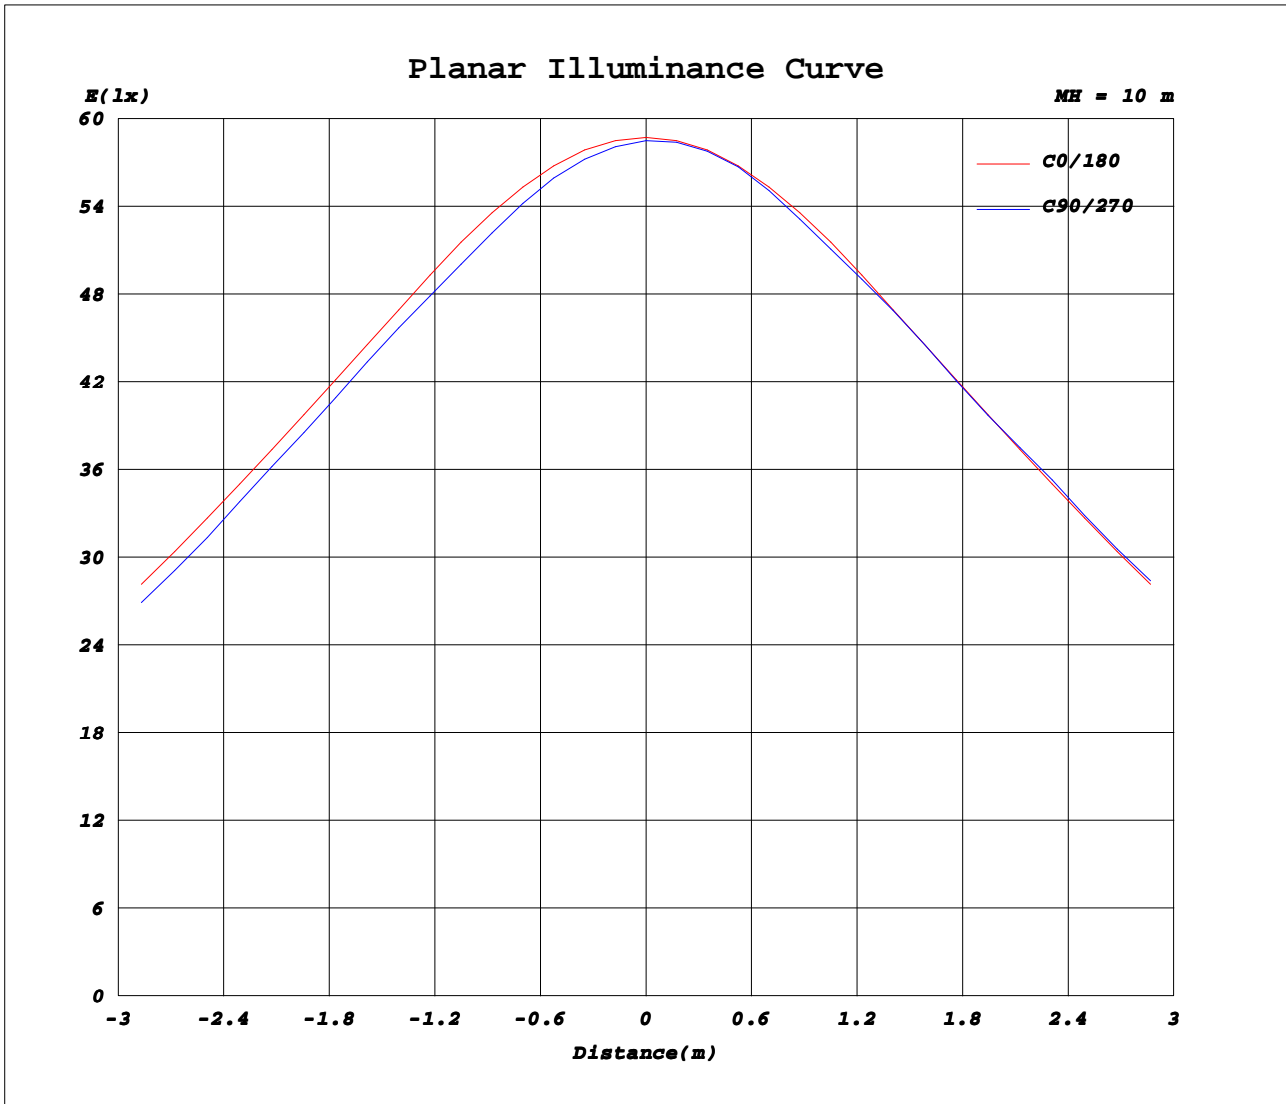

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.60V I:0.1090A P:23.100W PF:0.9570 Freq:50.00Hz		
Lamp Flux:2457.14x1 lm		
Name: NS72-25W	Type: LED	
MFR.: Lumega Group	DIM.: D80*H170mm	
	SUR.: D65mm	

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	5872	5862	5854	5849	5854	5862	5872	5862	5854	5849	5854	5862							
5	5420	5382	5327	5280	5327	5382	5420	5429	5407	5375	5407	5429							
10	4412	4381	4331	4285	4331	4381	4412	4441	4432	4405	4432	4441							
15	3373	3333	3277	3229	3277	3333	3373	3413	3413	3392	3413	3413							
20	2396	2345	2286	2239	2286	2345	2396	2427	2424	2404	2424	2427							
25	1590	1553	1509	1474	1509	1553	1590	1631	1641	1632	1641	1631							
30	894	845	792	752	792	845	894	945	961	953	961	945							
35	309	282	253	231	253	282	309	338	348	344	348	338							
40	64.4	58.4	52.2	47.7	52.2	58.4	64.4	67.0	66.8	65.1	66.8	67.0							
45	27.3	25.4	23.7	22.4	23.7	25.4	27.3	28.0	28.0	27.7	28.0	28.0							
50	18.2	17.4	16.6	16.1	16.6	17.4	18.2	19.1	19.5	19.6	19.5	19.1							
55	12.8	12.1	11.5	11.1	11.5	12.1	12.8	13.5	13.8	13.8	13.8	13.5							
60	9.09	8.58	8.16	7.90	8.16	8.58	9.09	9.61	9.90	9.98	9.90	9.61							
65	7.66	7.58	7.51	7.46	7.51	7.58	7.66	8.38	8.87	9.09	8.87	8.38							
70	5.79	5.29	4.84	4.54	4.84	5.29	5.79	6.42	6.75	6.83	6.75	6.42							
75	4.11	3.60	3.15	2.87	3.15	3.60	4.11	4.78	5.15	5.26	5.15	4.78							
80	3.34	2.79	2.32	2.04	2.32	2.79	3.34	4.17	4.67	4.84	4.67	4.17							
85	2.72	2.08	1.54	1.20	1.54	2.08	2.72	3.68	4.25	4.44	4.25	3.68							
90	2.45	1.77	1.21	0.89	1.21	1.77	2.45	3.33	3.86	4.04	3.86	3.33							
95	2.89	2.16	1.57	1.23	1.57	2.16	2.89	3.80	4.35	4.54	4.35	3.80							
100	3.43	2.66	2.04	1.68	2.04	2.66	3.43	4.35	4.90	5.09	4.90	4.35							
105	4.12	3.36	2.74	2.38	2.74	3.36	4.12	5.00	5.54	5.72	5.54	5.00							
110	5.06	4.34	3.76	3.43	3.76	4.34	5.06	5.88	6.39	6.56	6.39	5.88							
115	6.30	5.61	5.06	4.76	5.06	5.61	6.30	7.06	7.53	7.70	7.53	7.06							
120	7.90	7.22	6.69	6.40	6.69	7.22	7.90	8.59	9.02	9.18	9.02	8.59							
125	9.91	9.28	8.79	8.53	8.79	9.28	9.91	10.5	10.9	11.0	10.9	10.5							
130	12.4	11.9	11.5	11.3	11.5	11.9	12.4	12.8	13.1	13.2	13.1	12.8							
135	15.3	14.9	14.6	14.5	14.6	14.9	15.3	15.6	15.8	15.9	15.8	15.6							
140	18.8	18.5	18.3	18.2	18.3	18.5	18.8	18.9	19.0	19.1	19.0	18.9							
145	22.3	22.1	22.0	22.0	22.0	22.1	22.3	22.4	22.5	22.6	22.5	22.4							
150	25.5	25.5	25.4	25.5	25.4	25.5	25.5	25.7	25.8	25.9	25.8	25.7							
155	27.7	27.7	27.8	27.8	27.8	27.7	27.7	28.1	28.4	28.5	28.4	28.1							
160	28.4	28.4	28.5	28.5	28.5	28.4	28.4	29.0	29.3	29.5	29.3	29.0							
165	27.4	27.4	27.4	27.4	27.4	27.4	27.4	28.1	28.5	28.7	28.5	28.1							
170	25.5	25.6	25.6	25.6	25.6	25.6	25.5	26.0	26.4	26.5	26.4	26.0							
175	24.1	24.2	24.1	24.1	24.1	24.2	24.1	24.4	24.5	24.6	24.5	24.4							
180	23.7	23.8	23.9	23.9	23.9	23.8	23.7	23.8	23.8	23.9	23.8	23.7							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: