
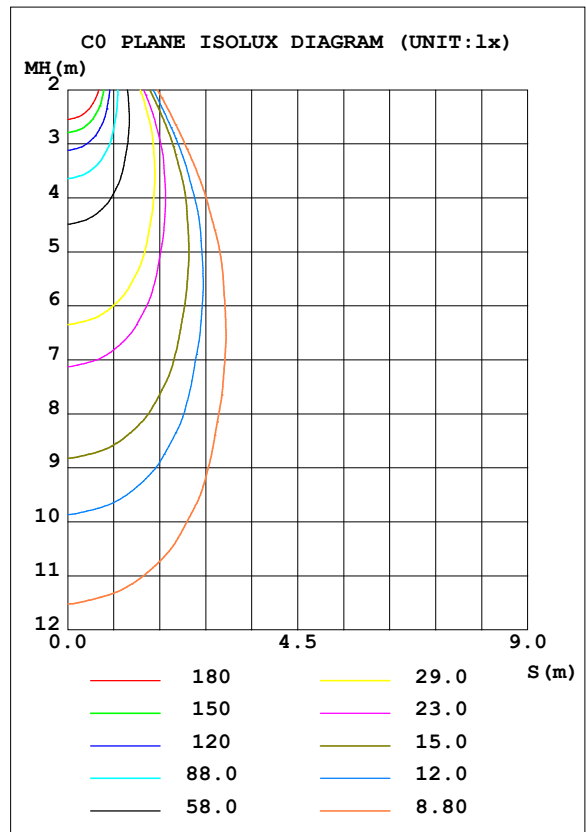


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.40V I:0.0580A P:9.9000W PF:0.9360 Freq:50.00Hz		
Lamp Flux:934.162x1 lm		
Name: NS77-10W	Type: LED	
MFR.: Lumega		

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	1175	S/MH (C0/180)	0.88
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	0.87
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	934.16	η UP, DN (C0-180)	0.3, 43.6
NOMINAL FLUX (lm)	934.162	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.6, 55.5
LAMPS INSIDE	1	η up (%)	0.9	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	220	η down (%)	99.1	CIBSE SHR MAX	0.85

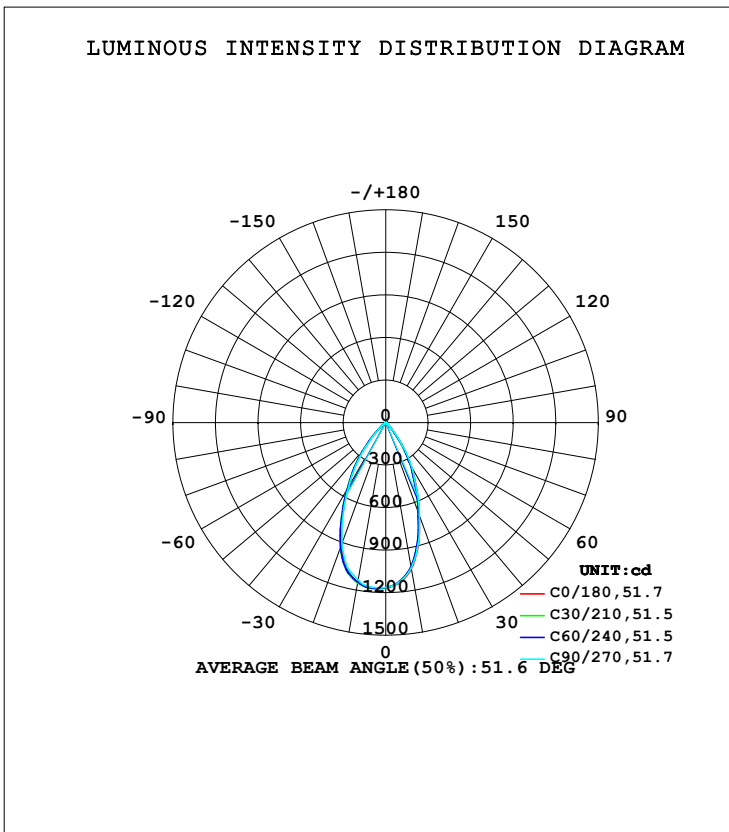

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1045	1030	1040	1092	1144	1145	1127	1093	0- 10	107.9	107.9	11.5,11.5
20	691.7	667.2	693.1	808.0	921.1	938.1	906.0	821.0	10- 20	269.4	377.3	40.4,40.4
30	369.4	354.4	374.8	458.0	539.2	550.8	526.6	464.1	20- 30	284.5	661.7	70.8,70.8
40	103.7	95.76	112.8	175.2	234.5	238.3	216.0	170.3	30- 40	188.3	850.1	91,91
50	11.65	10.31	14.44	28.73	41.90	41.12	34.73	24.96	40- 50	61.32	911.4	97.6,97.6
60	2.093	2.323	3.078	4.851	6.425	6.402	5.615	4.155	50- 60	10.15	921.5	98.6,98.6
70	0.3573	0.2855	0.5250	1.334	2.094	2.128	1.825	1.224	60- 70	2.394	923.9	98.9,98.9
80	0.1051	0.0163	0.1925	0.8402	1.473	1.592	1.423	0.9051	70- 80	0.9822	924.9	99,99
90	0.1523	0.0267	0.2043	0.9161	1.621	1.773	1.607	1.040	80- 90	0.9244	925.8	99.1,99.1
100	0.3712	0.2138	0.4085	1.222	2.030	2.201	2.011	1.371	90-100	1.183	927.0	99.2,99.2
110	0.5688	0.4033	0.6102	1.473	2.327	2.496	2.283	1.612	100-110	1.445	928.5	99.4,99.4
120	0.7262	0.5723	0.7716	1.595	2.406	2.558	2.347	1.710	110-120	1.538	930.0	99.6,99.6
130	0.8116	0.6907	0.8667	1.569	2.258	2.379	2.193	1.648	120-130	1.424	931.4	99.7,99.7
140	0.8117	0.7266	0.8715	1.426	1.966	2.054	1.898	1.468	130-140	1.157	932.6	99.8,99.8
150	0.7495	0.7239	0.8370	1.201	1.549	1.603	1.496	1.200	140-150	0.8174	933.4	99.9,99.9
160	0.6362	0.6458	0.7214	0.9184	1.104	1.141	1.085	0.9084	150-160	0.4840	933.9	100,100
170	0.5313	0.5840	0.6378	0.7002	0.7500	0.7649	0.7439	0.6605	160-170	0.2224	934.1	100,100
180	0.5559	0.6082	0.6403	0.6440	0.6338	0.6150	0.5928	0.5739	170-180	0.0615	934.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.40V I:0.0580A P:9.9000W PF:0.9360 Freq:50.00Hz		
Lamp Flux:934.162x1 lm		
Name: NS77-10W	Type: LED	
MFR.: Lumega		

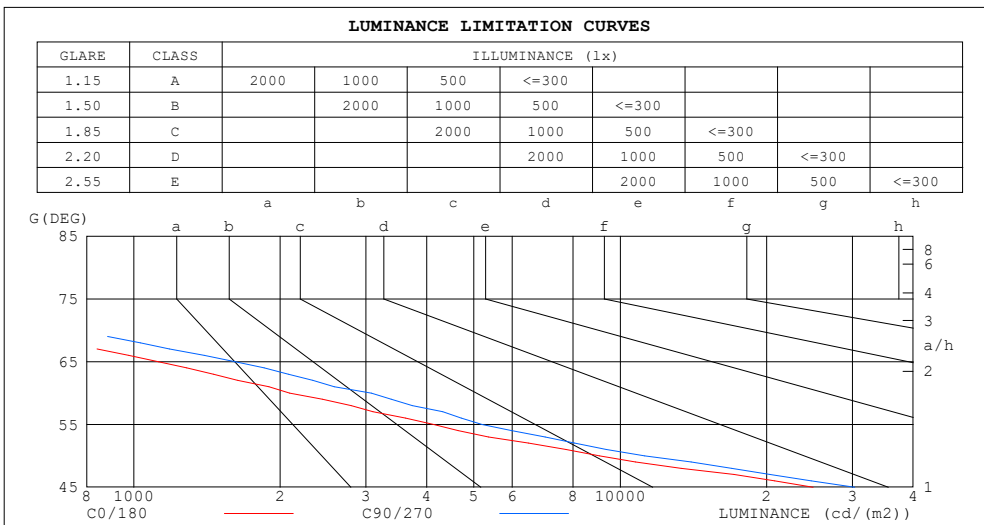

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	405	814
80	303	554
75	407	619
70	522	767
65	1124	1618
60	2093	3078
55	4134	5200
50	9064	11235
45	24926	30360


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.40V I:0.0580A P:9.9000W PF:0.9360 Freq:50.00Hz		
Lamp Flux:934.162x1 lm		
Name: NS77-10W	Type: LED	
MFR.: Lumega		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.86
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.89	.86	.83	.87	.84	.82	.80
4.0	.90	.84	.80	.89	.83	.80	.86	.82	.79	.84	.81	.78	.82	.79	.77	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.79	.75	.72	.78	.74	.72	.70
6.0	.79	.73	.69	.78	.73	.69	.77	.72	.68	.75	.71	.67	.74	.70	.67	.66
7.0	.74	.68	.64	.74	.68	.64	.72	.67	.64	.71	.67	.63	.70	.66	.63	.61
8.0	.70	.64	.60	.70	.64	.60	.68	.63	.60	.67	.63	.59	.66	.62	.59	.58
9.0	.66	.60	.57	.66	.60	.56	.65	.60	.56	.64	.59	.56	.63	.59	.56	.54
10.0	.63	.57	.53	.62	.57	.53	.61	.56	.53	.61	.56	.53	.60	.56	.53	.51

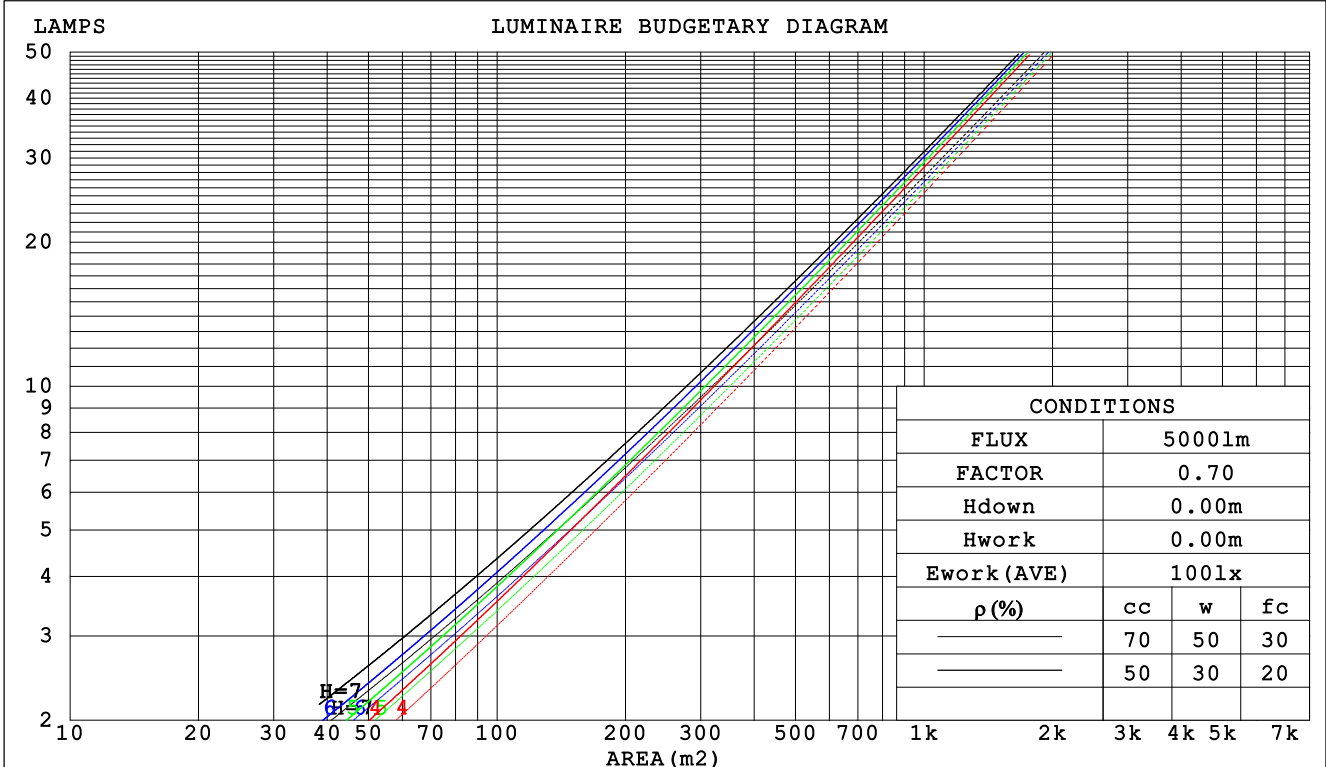

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.40V I:0.0580A P:9.9000W PF:0.9360 Freq:50.00Hz		
Lamp Flux:934.162x1 lm		
Name: NS77-10W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.178	.101	.032	.171	.097	.031	.158	.091	.029	.146	.084	.027	.135	.078	.025	
2.0	.170	.093	.029	.164	.090	.028	.153	.085	.026	.143	.080	.025	.133	.075	.024	
3.0	.162	.086	.026	.157	.084	.025	.147	.080	.024	.139	.076	.023	.131	.072	.022	
4.0	.154	.080	.024	.150	.078	.023	.142	.075	.022	.134	.072	.022	.127	.069	.021	
5.0	.147	.075	.022	.143	.074	.021	.136	.071	.021	.129	.068	.020	.123	.066	.020	
6.0	.140	.070	.020	.137	.069	.020	.131	.067	.019	.125	.065	.019	.119	.063	.019	
7.0	.134	.066	.019	.131	.065	.019	.126	.063	.018	.120	.062	.018	.115	.060	.018	
8.0	.128	.063	.018	.126	.062	.018	.121	.060	.017	.116	.059	.017	.111	.057	.017	
9.0	.123	.060	.017	.121	.059	.017	.116	.057	.016	.112	.056	.016	.108	.055	.016	
10.0	.118	.057	.016	.116	.056	.016	.112	.055	.015	.108	.054	.015	.104	.052	.015	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.197	.197	.197	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.178	.164	.152	.152	.141	.131	.104	.097	.090	.060	.056	.052	.019	.018	.017	
2.0	.163	.139	.120	.140	.120	.103	.096	.083	.072	.055	.048	.042	.018	.016	.014	
3.0	.151	.121	.097	.129	.104	.084	.089	.072	.059	.051	.042	.035	.016	.014	.011	
4.0	.140	.106	.079	.120	.091	.069	.083	.064	.049	.048	.037	.029	.015	.012	.009	
5.0	.132	.094	.067	.113	.082	.058	.078	.057	.041	.045	.033	.024	.015	.011	.008	
6.0	.124	.085	.057	.107	.074	.049	.074	.052	.035	.043	.030	.021	.014	.010	.007	
7.0	.118	.077	.049	.102	.067	.043	.070	.047	.030	.041	.028	.018	.013	.009	.006	
8.0	.112	.071	.043	.097	.062	.038	.067	.043	.027	.039	.026	.016	.013	.008	.005	
9.0	.107	.066	.038	.092	.057	.033	.064	.040	.024	.037	.024	.014	.012	.008	.005	
10.0	.103	.062	.034	.089	.054	.030	.061	.038	.021	.036	.022	.013	.012	.007	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.40V I:0.0580A P:9.9000W PF:0.9360 Freq:50.00Hz		
Lamp Flux:934.162x1 lm		
Name: NS77-10W	Type: LED	
MFR.: Lumega		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.0	19.9	19.2	20.1	20.3	19.3	20.2	19.5	20.4	20.6
3H	18.8	19.7	19.1	19.9	20.1	19.1	20.0	19.4	20.2	20.4
4H	18.7	19.5	19.0	19.8	20.0	19.0	19.8	19.3	20.0	20.3
6H	18.6	19.4	18.9	19.7	19.9	18.9	19.7	19.2	19.9	20.2
8H	18.6	19.3	18.9	19.6	19.9	18.9	19.6	19.2	19.9	20.1
12H	18.5	19.2	18.9	19.5	19.8	18.8	19.5	19.2	19.8	20.1
4H 2H	18.7	19.5	19.0	19.8	20.0	19.0	19.8	19.3	20.1	20.3
3H	18.5	19.3	18.9	19.5	19.8	18.8	19.5	19.2	19.8	20.1
4H	18.5	19.1	18.8	19.4	19.7	18.7	19.4	19.1	19.7	20.0
6H	18.4	18.9	18.7	19.3	19.6	18.6	19.2	19.0	19.5	19.9
8H	18.3	18.8	18.7	19.2	19.6	18.6	19.1	19.0	19.5	19.8
12H	18.3	18.7	18.7	19.1	19.5	18.5	19.0	18.9	19.4	19.8
8H 4H	18.3	18.8	18.7	19.2	19.6	18.6	19.1	19.0	19.5	19.8
6H	18.2	18.6	18.6	19.0	19.5	18.5	18.9	18.9	19.3	19.7
8H	18.1	18.5	18.6	18.9	19.4	18.4	18.8	18.9	19.2	19.7
12H	18.1	18.4	18.6	18.9	19.4	18.4	18.7	18.8	19.1	19.6
12H 4H	18.3	18.7	18.7	19.1	19.5	18.5	19.0	18.9	19.4	19.8
6H	18.1	18.5	18.6	18.9	19.4	18.4	18.8	18.9	19.2	19.7
8H	18.1	18.4	18.6	18.9	19.4	18.4	18.7	18.8	19.1	19.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.8 / -15.7					+ 3.9 / -14.5				
1.5H	+ 6.3 / -12.8					+ 6.3 / -12.6				
2.0H	+ 7.5 / -10.2					+ 7.8 / -10.2				

CIE Pub.117, 934.2 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.2)
 Area: 0.002 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.40V I:0.0580A P:9.9000W PF:0.9360 Freq:50.00Hz		
Lamp Flux:934.162x1 lm		
Name: NS77-10W	Type: LED	
MFR.: Lumega		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	79	75	85	79	75	84	79	75	71
0.80	94	87	84	93	87	83	92	86	83	79
1.00	98	93	89	97	92	88	96	92	88	84
1.25	102	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	109	106	104	106	104	102	95
4.00	113	110	108	111	109	107	107	106	104	97
5.00	115	112	110	112	110	109	108	107	105	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.40V I:0.0580A P:9.9000W PF:0.9360 Freq:50.00Hz		
Lamp Flux:934.162x1 lm		
Name: NS77-10W	Type: LED	
MFR.: Lumega		

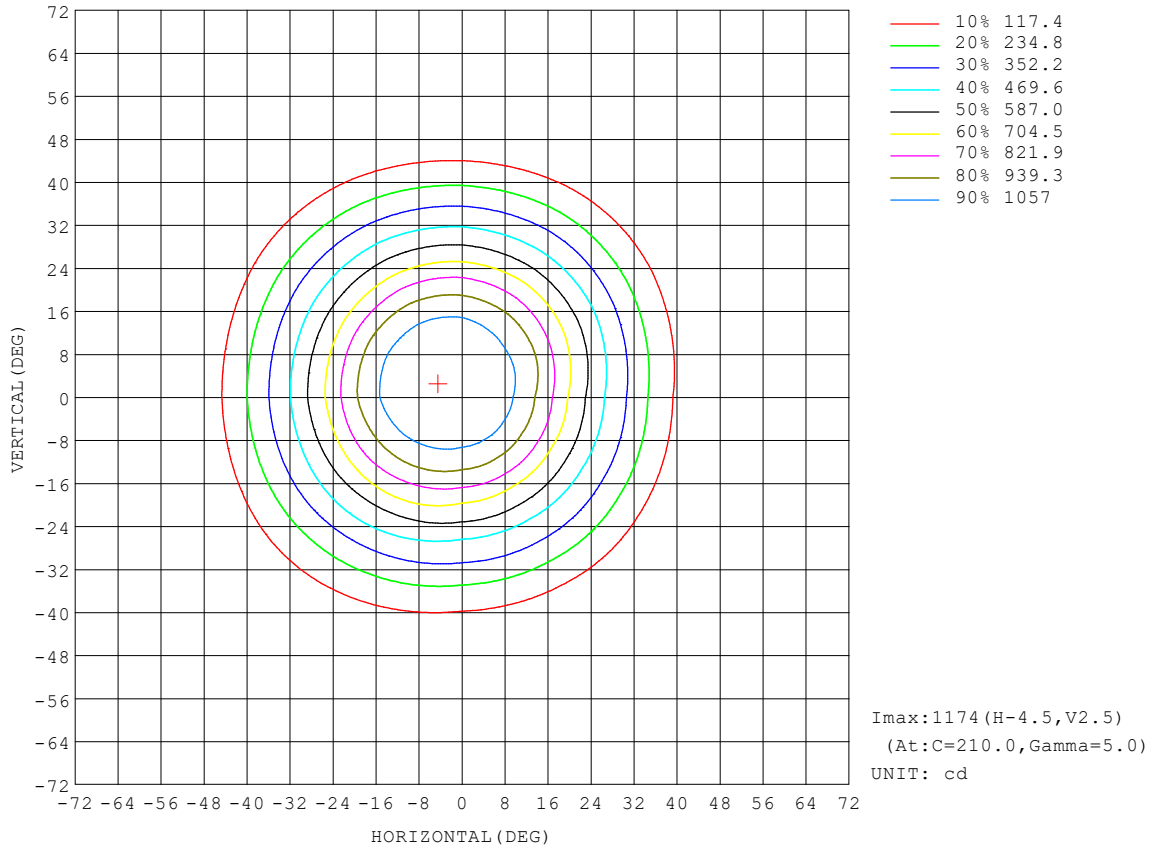


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

AAI Figure

Test:U:220.40V I:0.0580A P:9.9000W PF:0.9360 Freq:50.00Hz		
Lamp Flux:934.162x1 lm		
Name: NS77-10W	Type: LED	
MFR.: Lumega		

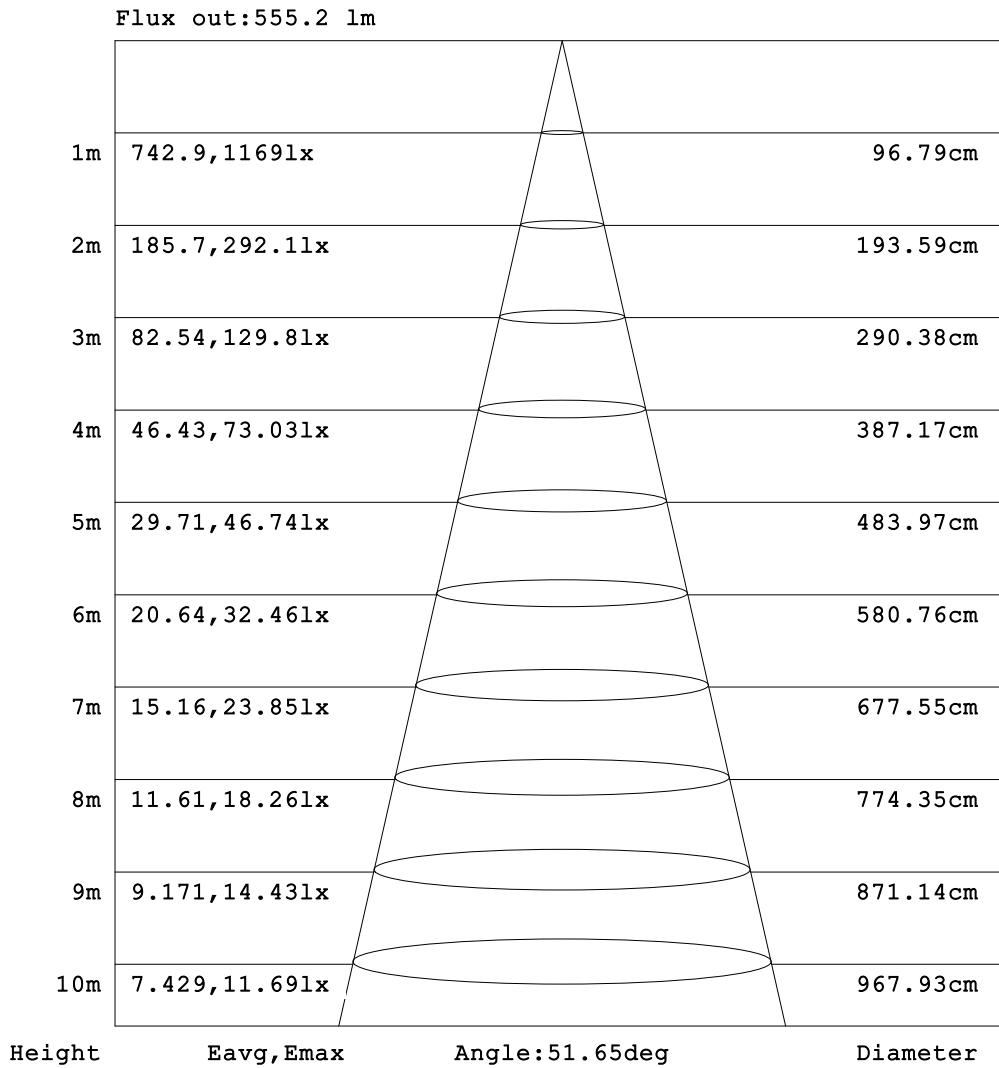


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.40V I:0.0580A P:9.9000W PF:0.9360 Freq:50.00Hz Lamp Flux:934.162x1 lm		
Name: NS77-10W	Type: LED	
MFR.: Lumega		

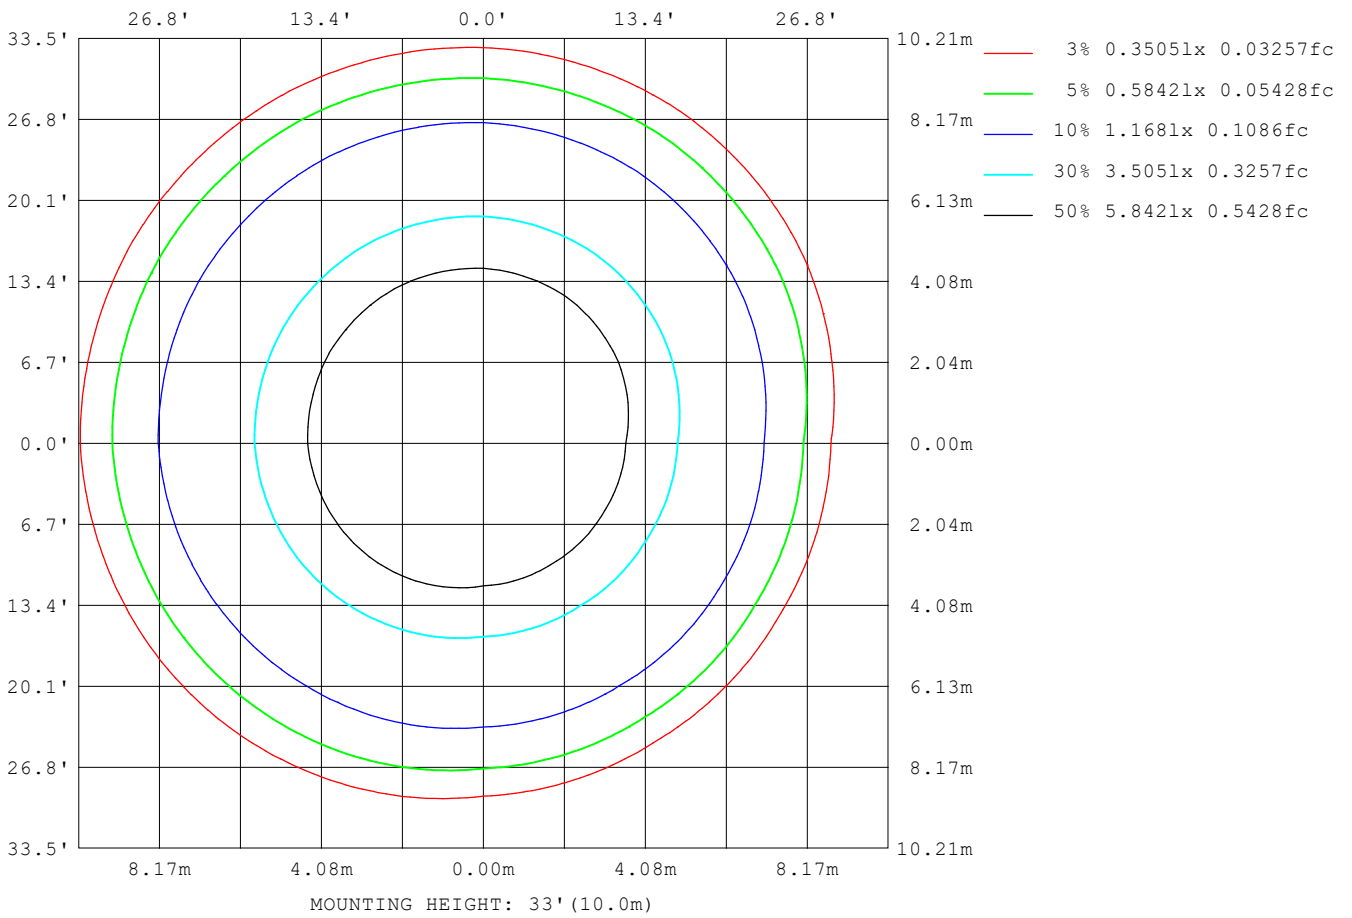

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

Planar Illuminance Curve

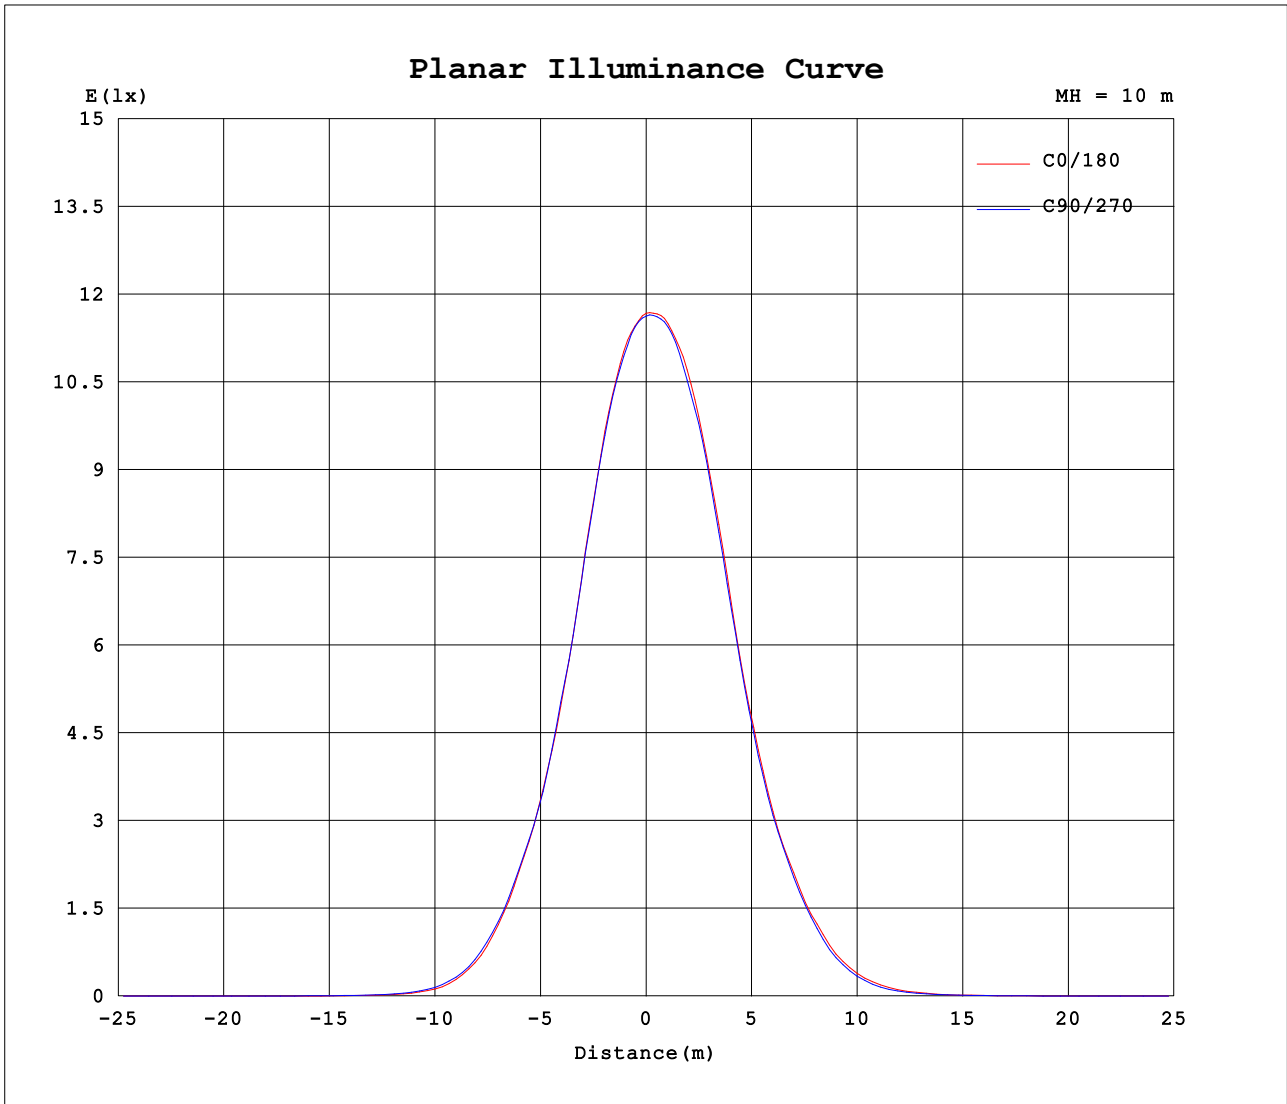

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.40V I:0.0580A P:9.9000W PF:0.9360 Freq:50.00Hz		
Lamp Flux:934.162x1 lm		
Name: NS77-10W	Type: LED	
MFR.: Lumega		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1167	1165	1163	1162	1164	1166	1167	1166	1164	1162	1163	1165							
5	1134	1125	1123	1126	1140	1157	1172	1175	1172	1166	1158	1148							
10	1045	1031	1030	1040	1074	1111	1144	1149	1142	1127	1107	1079							
15	894	872	870	888	945	1008	1064	1079	1075	1053	1017	964							
20	692	667	667	693	767	849	921	941	935	906	857	785							
25	521	496	495	517	583	656	721	740	737	712	669	605							
30	369	354	355	375	429	487	539	553	548	527	490	438							
35	223	210	214	233	282	336	383	396	391	370	336	287							
40	104	94.2	97.3	113	153	197	235	242	235	216	189	152							
45	35.3	31.1	33.7	42.9	65.8	90.1	111	114	109	97.2	81.9	61.3							
50	11.7	9.84	10.8	14.4	23.8	33.7	41.9	42.4	39.8	34.7	28.8	21.1							
55	4.74	4.34	4.75	5.97	8.85	11.9	14.4	14.8	14.2	12.7	10.8	8.10							
60	2.09	2.16	2.49	3.08	4.25	5.45	6.43	6.55	6.26	5.61	4.74	3.57							
65	0.95	0.91	1.04	1.37	2.08	2.82	3.44	3.54	3.39	3.02	2.52	1.82							
70	0.36	0.26	0.31	0.52	1.05	1.61	2.09	2.18	2.08	1.82	1.47	0.98							
75	0.21	0.13	0.16	0.32	0.71	1.14	1.51	1.61	1.57	1.40	1.13	0.73							
80	0.11	0.00	0.03	0.19	0.61	1.07	1.47	1.60	1.58	1.42	1.12	0.69							
85	0.07	0.00	0.00	0.14	0.58	1.07	1.50	1.64	1.63	1.47	1.16	0.69							
90	0.15	0.02	0.04	0.20	0.66	1.17	1.62	1.78	1.77	1.61	1.28	0.80							
95	0.26	0.11	0.12	0.30	0.80	1.35	1.84	2.01	2.00	1.83	1.48	0.95							
100	0.37	0.21	0.22	0.41	0.93	1.51	2.03	2.20	2.20	2.01	1.64	1.10							
105	0.48	0.31	0.32	0.51	1.06	1.67	2.20	2.38	2.37	2.17	1.79	1.22							
110	0.57	0.40	0.41	0.61	1.17	1.78	2.33	2.50	2.49	2.28	1.90	1.33							
115	0.65	0.48	0.50	0.70	1.25	1.87	2.41	2.58	2.55	2.34	1.96	1.40							
120	0.73	0.56	0.58	0.77	1.30	1.89	2.41	2.57	2.55	2.35	1.98	1.44							
125	0.78	0.63	0.65	0.83	1.33	1.87	2.36	2.50	2.48	2.29	1.95	1.44							
130	0.81	0.68	0.70	0.87	1.32	1.82	2.26	2.39	2.37	2.19	1.88	1.42							
135	0.82	0.70	0.73	0.88	1.29	1.74	2.13	2.25	2.22	2.06	1.78	1.36							
140	0.81	0.72	0.74	0.87	1.23	1.62	1.97	2.07	2.04	1.90	1.65	1.29							
145	0.79	0.72	0.74	0.86	1.16	1.49	1.77	1.85	1.83	1.70	1.49	1.19							
150	0.75	0.71	0.74	0.84	1.07	1.33	1.55	1.61	1.59	1.50	1.32	1.08							
155	0.69	0.67	0.71	0.79	0.97	1.16	1.33	1.38	1.37	1.29	1.15	0.95							
160	0.64	0.63	0.66	0.72	0.85	0.99	1.10	1.14	1.14	1.09	0.98	0.83							
165	0.56	0.59	0.62	0.67	0.75	0.83	0.90	0.93	0.92	0.89	0.81	0.71							
170	0.53	0.57	0.60	0.64	0.68	0.72	0.75	0.77	0.76	0.74	0.70	0.63							
175	0.53	0.57	0.60	0.63	0.65	0.66	0.67	0.68	0.68	0.67	0.64	0.59							
180	0.56	0.59	0.62	0.64	0.65	0.64	0.63	0.62	0.61	0.59	0.58	0.57							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: