
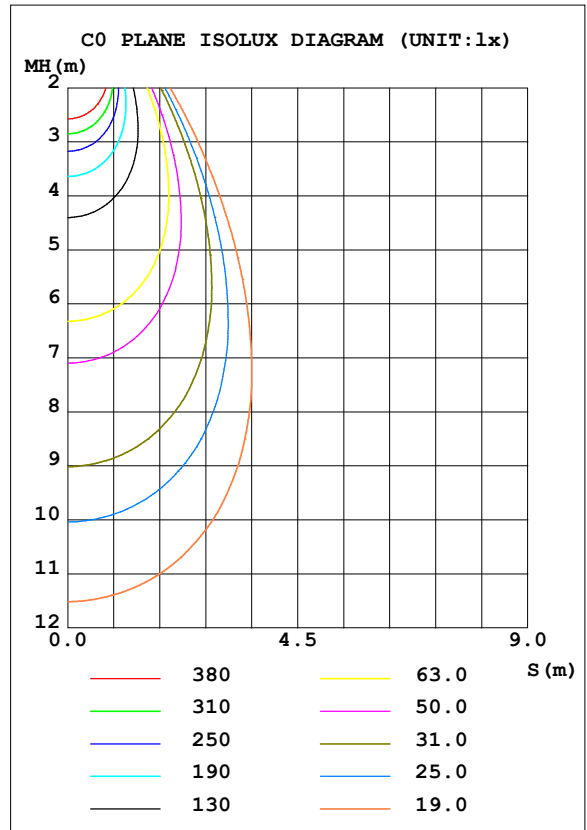


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.40V I:0.1220A P:24.900W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2193.24x1 lm		
Name: NS77-25W	Type: LED	
MFR.: Lumega		

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	2519	S/MH (C0/180)	0.85
NOMINAL POWER (W)	25	LOR (%)	100.0	S/MH (C90/270)	0.86
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	2193.2	η UP, DN (C0-180)	0.3, 48.4
NOMINAL FLUX (lm)	2193.24	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.6, 50.7
LAMPS INSIDE	1	η up (%)	0.9	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	220	η down (%)	99.1	CIBSE SHR MAX	0.90

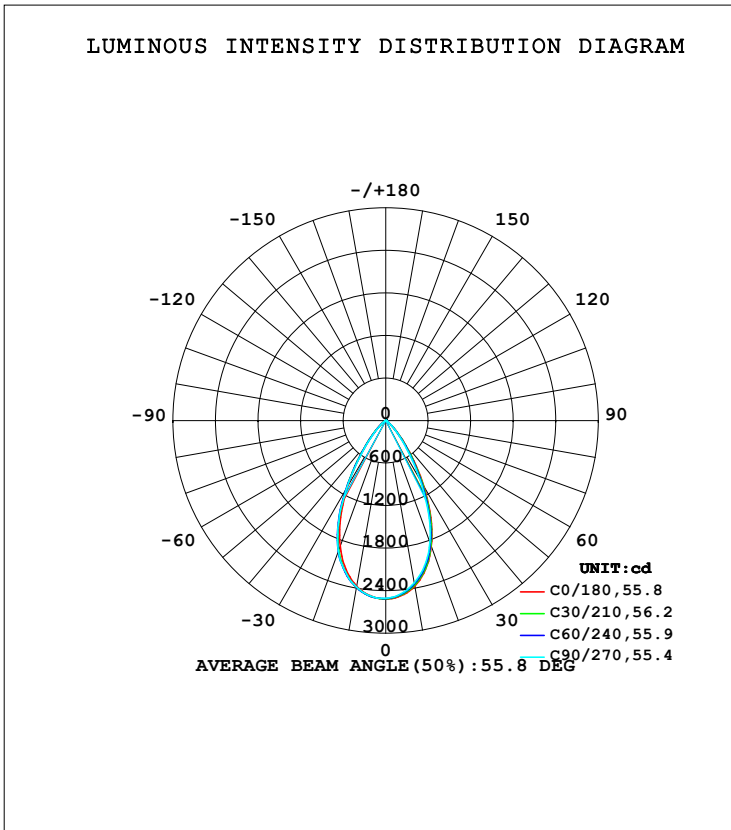

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2371	2347	2323	2347	2371	2389	2384	2389	0- 10	232.9	232.9	10.6,10.6
20	1885	1859	1821	1859	1885	1954	1962	1954	10- 20	606.1	839.0	38.3,38.3
30	1084	1035	975.3	1035	1084	1128	1115	1128	20- 30	686.1	1525	69.5,69.5
40	402.4	379.4	348.6	379.4	402.4	396.1	373.6	396.1	30- 40	427.1	1952	89,89
50	105.4	97.25	86.10	97.25	105.4	95.49	83.46	95.49	40- 50	164.2	2116	96.5,96.5
60	20.51	18.34	16.16	18.34	20.51	19.23	17.50	19.23	50- 60	40.73	2157	98.4,98.4
70	5.005	4.044	3.154	4.044	5.005	4.888	4.420	4.888	60- 70	10.40	2168	98.8,98.8
80	2.089	1.336	0.8438	1.336	2.089	3.083	3.465	3.083	70- 80	2.879	2170	99,99
90	2.280	1.196	0.5325	1.196	2.280	3.507	3.999	3.507	80- 90	2.365	2173	99.1,99.1
100	3.014	1.759	0.9850	1.759	3.014	4.394	4.937	4.394	90-100	2.931	2176	99.2,99.2
110	3.605	2.259	1.415	2.259	3.605	4.960	5.467	4.960	100-110	3.530	2179	99.4,99.4
120	3.866	2.602	1.800	2.602	3.866	5.049	5.470	5.049	110-120	3.685	2183	99.5,99.5
130	3.838	2.764	2.075	2.764	3.838	4.773	5.088	4.773	120-130	3.401	2186	99.7,99.7
140	3.565	2.728	2.180	2.728	3.565	4.231	4.435	4.231	130-140	2.811	2189	99.8,99.8
150	3.062	2.481	2.088	2.481	3.062	3.462	3.561	3.462	140-150	2.035	2191	99.9,99.9
160	2.387	2.085	1.874	2.085	2.387	2.555	2.579	2.555	150-160	1.231	2192	100,100
170	1.876	1.764	1.686	1.764	1.876	1.927	1.930	1.927	160-170	0.5878	2193	100,100
180	1.779	1.746	1.727	1.746	1.779	1.773	1.768	1.773	170-180	0.1705	2193	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.40V I:0.1220A P:24.900W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2193.24x1 lm		
Name: NS77-25W	Type: LED	
MFR.: Lumega		

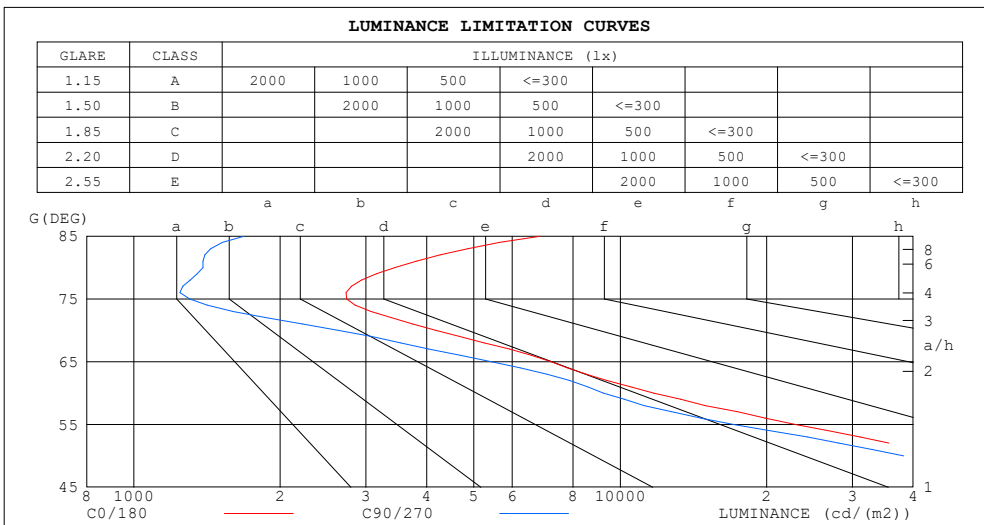

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6837	1684
80	3437	1388
75	2741	1304
70	4181	2634
65	7210	5436
60	11718	9234
55	22915	17102
50	46846	38271
45	86977	74035


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.40V I:0.1220A P:24.900W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2193.24x1 lm		
Name: NS77-25W	Type: LED	
MFR.: Lumega		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.00	.99	.99	.97	.96	.95	.94	.92
2.0	1.02	.98	.95	1.01	.97	.94	.97	.94	.92	.94	.92	.90	.91	.89	.88	.86
3.0	.95	.90	.86	.94	.89	.86	.91	.87	.84	.89	.85	.83	.86	.84	.81	.80
4.0	.89	.83	.79	.88	.83	.79	.86	.81	.78	.83	.80	.77	.81	.78	.76	.74
5.0	.83	.77	.73	.82	.77	.73	.80	.76	.72	.79	.74	.71	.77	.73	.70	.69
6.0	.78	.72	.68	.77	.71	.67	.76	.71	.67	.74	.70	.66	.73	.69	.66	.64
7.0	.73	.67	.63	.73	.67	.63	.71	.66	.62	.70	.65	.62	.69	.65	.62	.60
8.0	.69	.63	.59	.68	.63	.59	.67	.62	.58	.66	.61	.58	.65	.61	.58	.56
9.0	.65	.59	.55	.65	.59	.55	.64	.58	.55	.63	.58	.55	.62	.57	.54	.53
10.0	.62	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.51	.59	.54	.51	.50

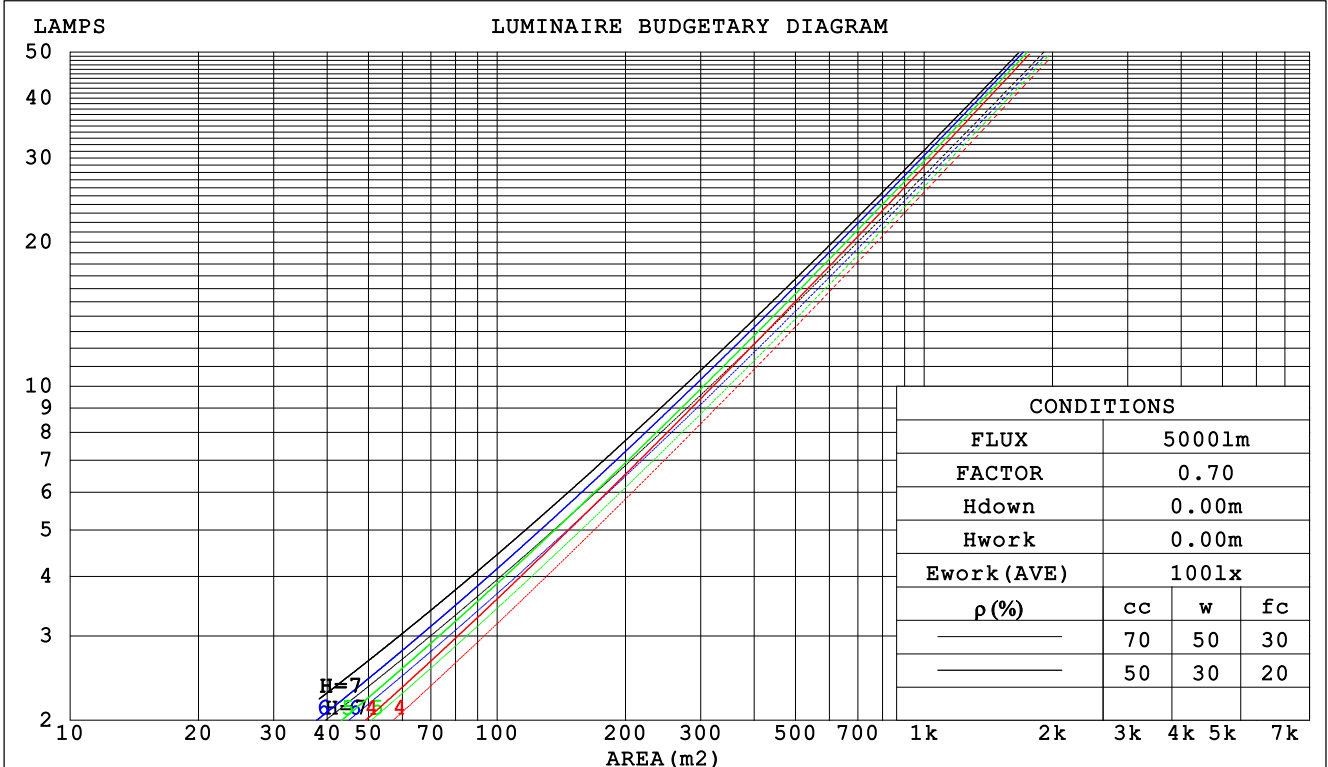

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.40V I:0.1220A P:24.900W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2193.24x1 lm		
Name: NS77-25W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.182	.103	.033	.175	.100	.032	.161	.093	.030	.149	.086	.028	.138	.080	.026	
2.0	.174	.095	.029	.168	.093	.029	.157	.087	.027	.147	.082	.026	.137	.078	.024	
3.0	.166	.088	.026	.161	.086	.026	.151	.082	.025	.142	.078	.024	.134	.074	.023	
4.0	.158	.082	.024	.153	.080	.024	.145	.077	.023	.138	.074	.022	.130	.071	.022	
5.0	.150	.077	.022	.147	.075	.022	.139	.073	.021	.133	.070	.021	.126	.067	.020	
6.0	.144	.072	.021	.140	.071	.020	.134	.069	.020	.128	.066	.020	.122	.064	.019	
7.0	.137	.068	.019	.134	.067	.019	.128	.065	.019	.123	.063	.018	.118	.061	.018	
8.0	.131	.064	.018	.128	.063	.018	.123	.062	.018	.118	.060	.017	.114	.058	.017	
9.0	.125	.061	.017	.123	.060	.017	.118	.059	.017	.114	.057	.016	.110	.056	.016	
10.0	.120	.058	.016	.118	.057	.016	.114	.056	.016	.110	.055	.016	.106	.053	.015	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.179	.164	.152	.153	.141	.131	.105	.097	.090	.060	.056	.052	.019	.018	.017	
2.0	.164	.140	.119	.140	.120	.103	.096	.083	.072	.055	.048	.042	.018	.016	.014	
3.0	.152	.121	.096	.130	.104	.083	.089	.072	.059	.052	.042	.035	.017	.014	.011	
4.0	.142	.106	.079	.122	.092	.069	.084	.064	.048	.048	.037	.029	.016	.012	.009	
5.0	.133	.095	.066	.114	.082	.058	.079	.057	.041	.046	.034	.024	.015	.011	.008	
6.0	.126	.085	.057	.108	.074	.049	.075	.052	.035	.043	.030	.021	.014	.010	.007	
7.0	.119	.078	.049	.103	.068	.043	.071	.047	.030	.041	.028	.018	.013	.009	.006	
8.0	.114	.072	.043	.098	.062	.037	.068	.044	.027	.039	.026	.016	.013	.008	.005	
9.0	.109	.067	.038	.094	.058	.033	.065	.041	.024	.038	.024	.014	.012	.008	.005	
10.0	.104	.062	.034	.090	.054	.030	.062	.038	.021	.036	.023	.013	.012	.007	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.40V I:0.1220A P:24.900W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2193.24x1 lm		
Name: NS77-25W	Type: LED	
MFR.: Lumega		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.2	24.2	23.5	24.4	24.6	22.6	23.6	22.9	23.8	24.0
3H	23.1	24.0	23.4	24.2	24.4	22.5	23.3	22.7	23.6	23.8
4H	23.0	23.8	23.3	24.1	24.3	22.4	23.2	22.7	23.4	23.7
6H	22.9	23.7	23.2	23.9	24.2	22.3	23.1	22.6	23.3	23.6
8H	22.9	23.6	23.2	23.9	24.2	22.2	23.0	22.6	23.3	23.5
12H	22.8	23.5	23.2	23.8	24.1	22.2	22.9	22.5	23.2	23.5
4H 2H	23.0	23.8	23.3	24.1	24.3	22.4	23.2	22.7	23.5	23.7
3H	22.8	23.6	23.2	23.8	24.1	22.2	22.9	22.6	23.2	23.5
4H	22.7	23.4	23.1	23.7	24.0	22.1	22.8	22.5	23.1	23.4
6H	22.6	23.2	23.0	23.6	23.9	22.0	22.6	22.4	22.9	23.3
8H	22.6	23.1	23.0	23.5	23.9	22.0	22.5	22.4	22.9	23.3
12H	22.6	23.0	23.0	23.4	23.8	21.9	22.4	22.4	22.8	23.2
8H 4H	22.6	23.1	23.0	23.5	23.9	22.0	22.5	22.4	22.9	23.3
6H	22.5	22.9	22.9	23.3	23.8	21.9	22.3	22.3	22.7	23.2
8H	22.5	22.8	22.9	23.3	23.7	21.8	22.2	22.3	22.6	23.1
12H	22.4	22.7	22.9	23.2	23.7	21.8	22.1	22.3	22.6	23.0
12H 4H	22.5	23.0	23.0	23.4	23.8	21.9	22.4	22.4	22.8	23.2
6H	22.4	22.8	22.9	23.3	23.7	21.8	22.2	22.3	22.6	23.1
8H	22.4	22.7	22.9	23.2	23.7	21.8	22.1	22.3	22.6	23.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.9 / - 8.9					+ 2.6 / -10.0				
1.5H	+ 4.4 / - 7.3					+ 4.1 / - 7.4				
2.0H	+ 5.9 / - 7.7					+ 5.7 / - 7.8				

CIE Pub.117, 2193 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.7)
 Area: 0.0035 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.40V I:0.1220A P:24.900W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2193.24x1 lm		
Name: NS77-25W	Type: LED	
MFR.: Lumega		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	85	78	74	84	78	74	83	77	73	70
0.80	92	86	82	92	86	82	90	85	82	78
1.00	97	91	88	97	91	87	95	91	87	83
1.25	102	96	93	101	96	92	99	94	91	87
1.50	105	100	96	103	99	96	101	97	94	90
2.00	108	103	100	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	104	102	99	93
3.00	111	107	105	109	106	103	106	103	101	94
4.00	113	110	108	111	108	106	107	105	104	96
5.00	114	112	110	112	110	108	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.40V I:0.1220A P:24.900W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2193.24x1 lm		
Name: NS77-25W	Type: LED	
MFR.: Lumega		

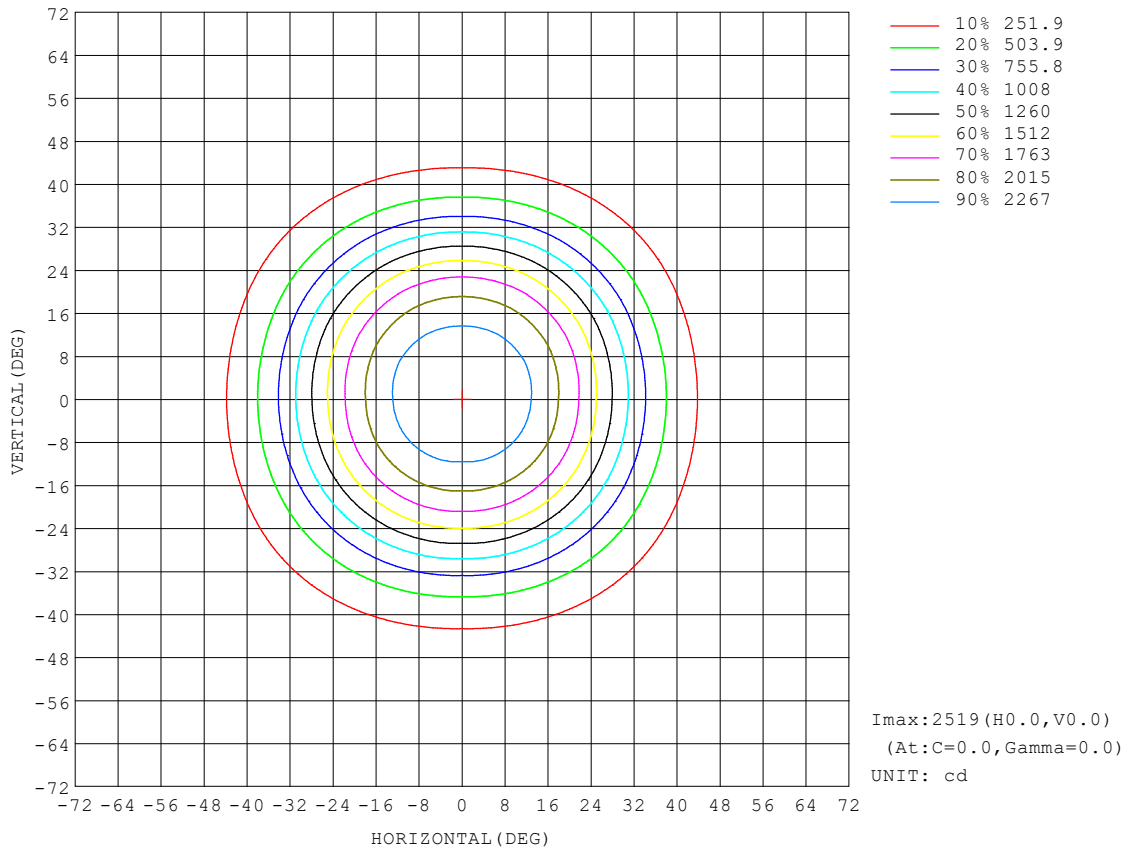


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

AAI Figure

Test:U:220.40V I:0.1220A P:24.900W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2193.24x1 lm		
Name: NS77-25W	Type: LED	
MFR.: Lumega		

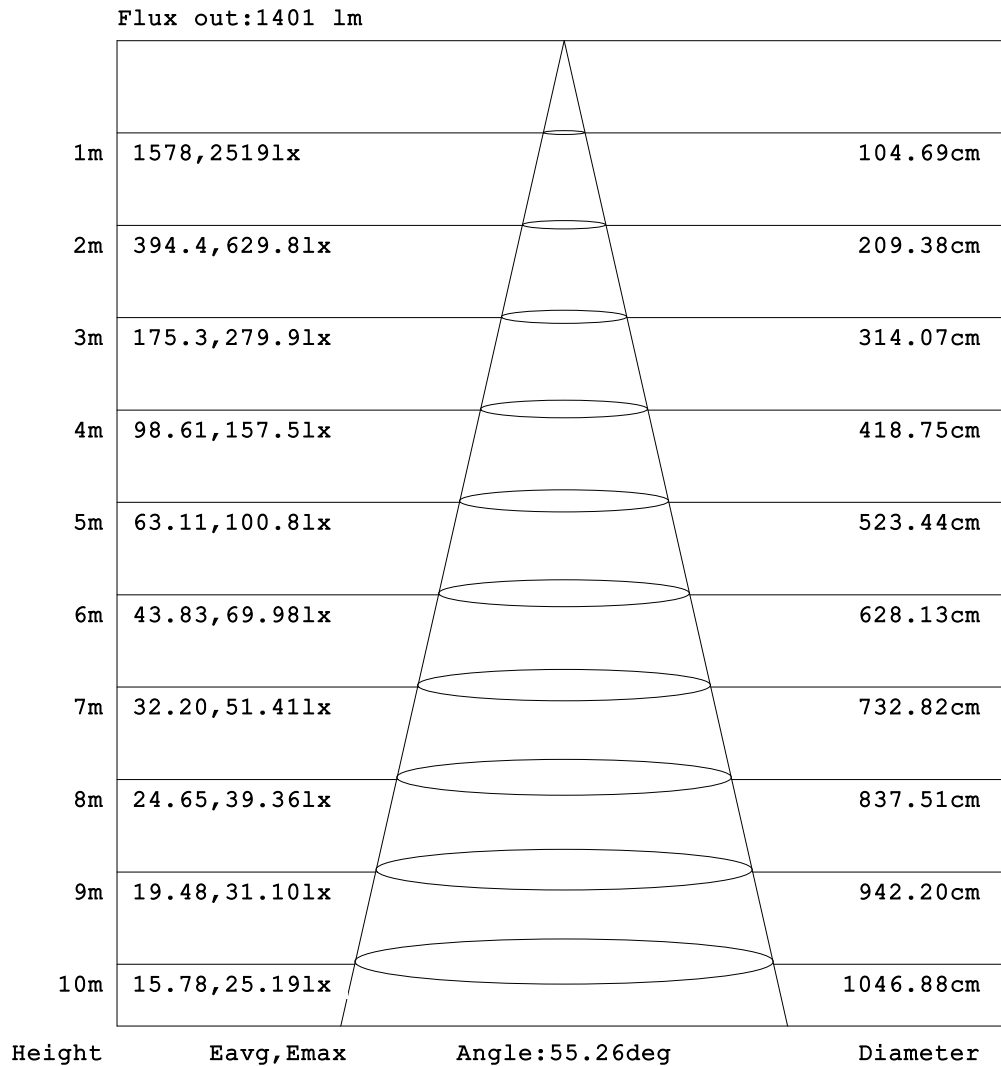


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test: U:220.40V I:0.1220A P:24.900W PF:0.9580 Freq:50.00Hz Lamp Flux:2193.24x1 lm		
Name: NS77-25W	Type: LED	
MFR.: Lumega		

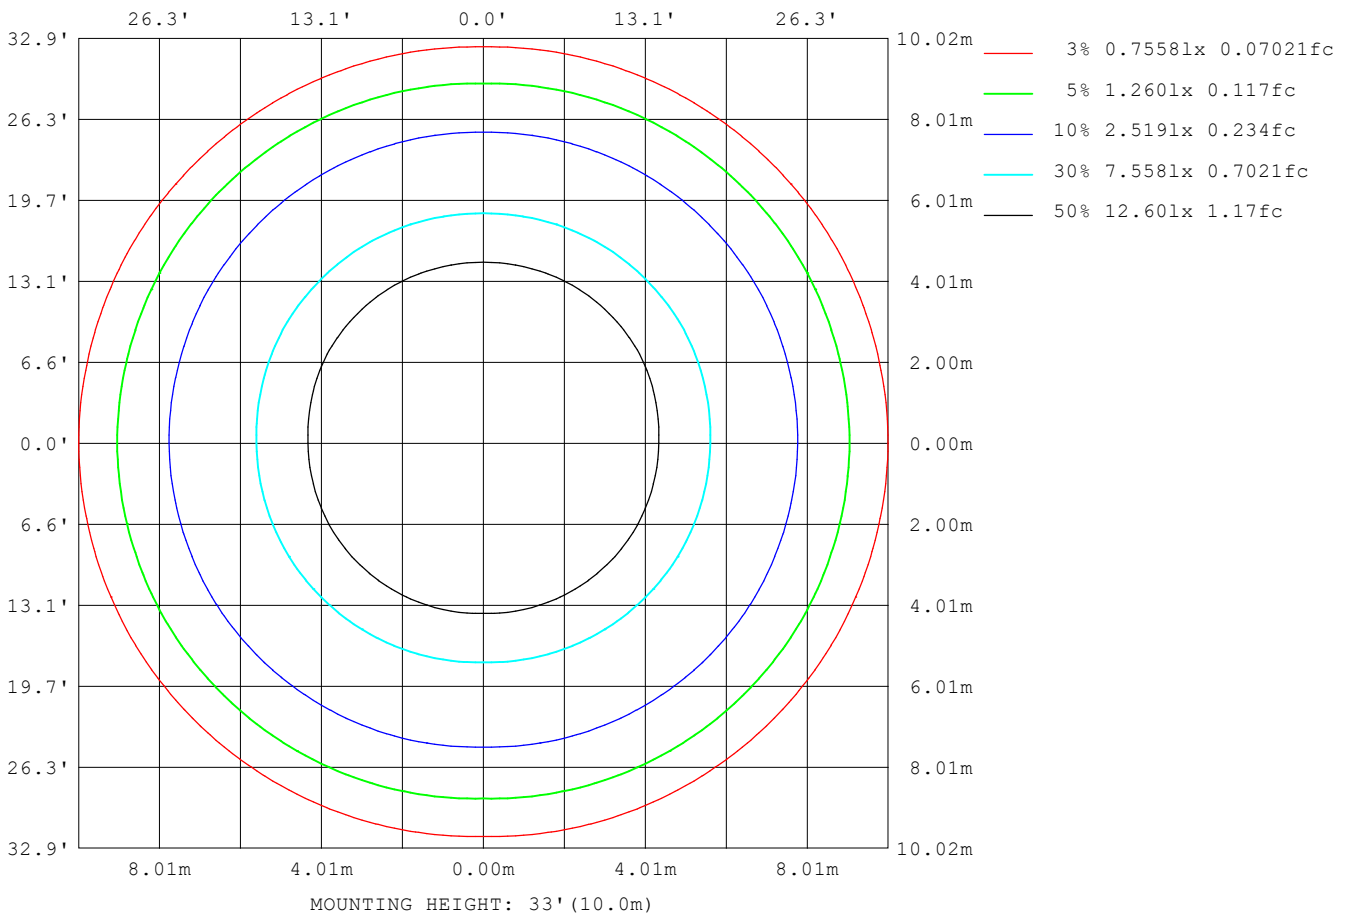

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

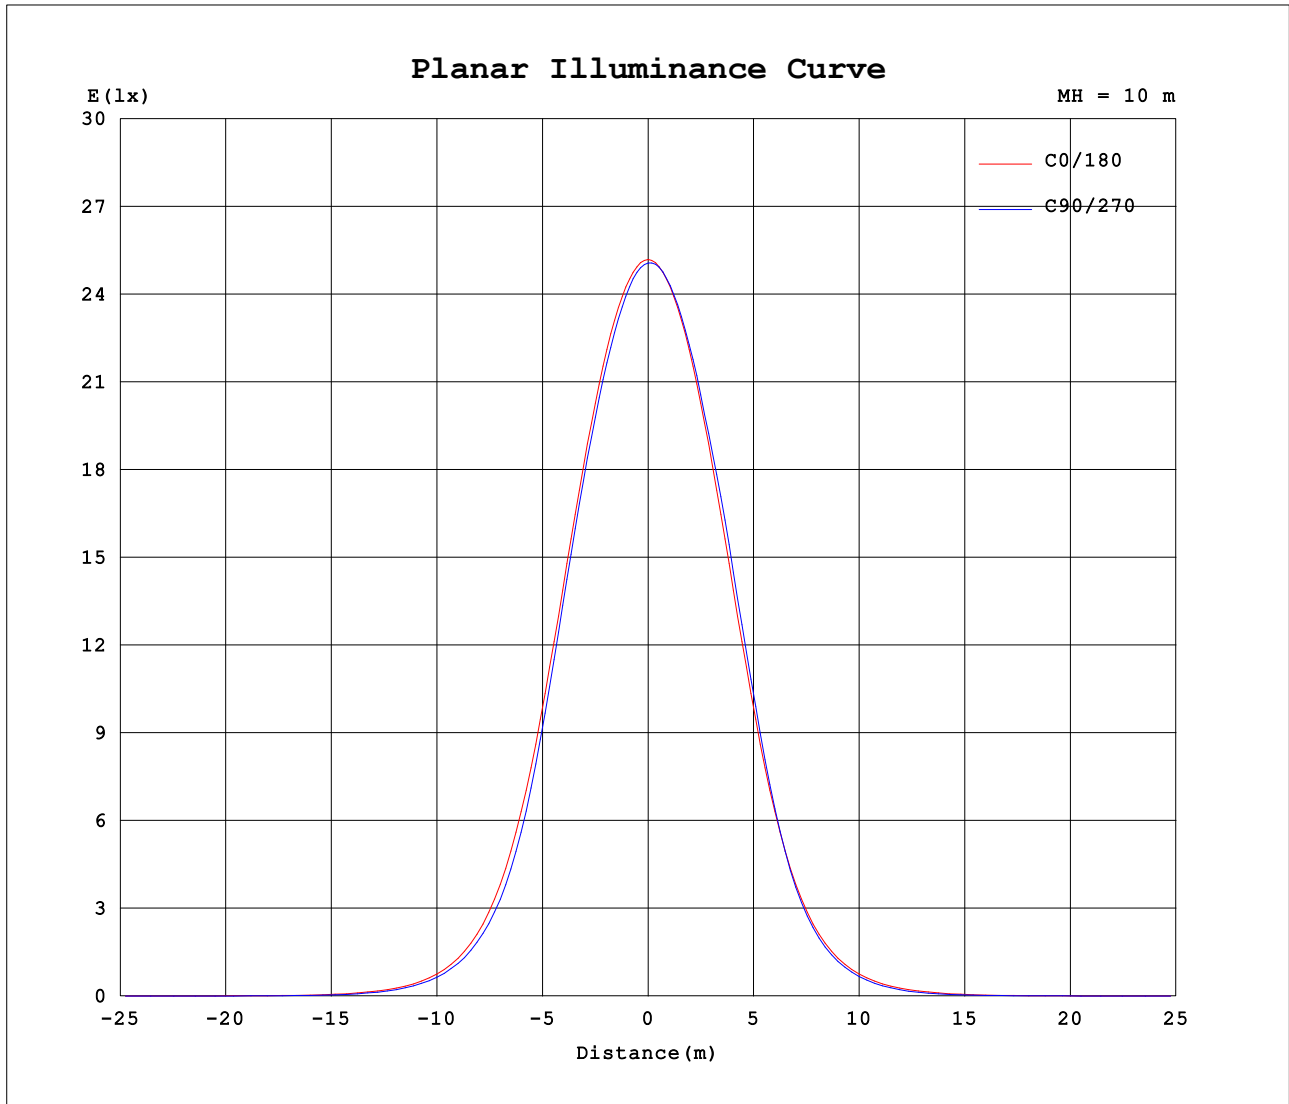

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.40V I:0.1220A P:24.900W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2193.24x1 lm		
Name: NS77-25W	Type: LED	
MFR.: Lumega		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	2519	2514	2509	2507	2509	2514	2519	2514	2509	2507	2509	2514							
5	2481	2472	2462	2453	2462	2472	2481	2487	2487	2483	2487	2487							
10	2371	2357	2338	2323	2338	2357	2371	2387	2390	2384	2390	2387							
15	2175	2162	2141	2121	2141	2162	2175	2205	2214	2207	2214	2205							
20	1885	1872	1846	1821	1846	1872	1885	1942	1965	1962	1965	1942							
25	1512	1493	1457	1423	1457	1493	1512	1570	1589	1580	1589	1570							
30	1084	1057	1014	975	1014	1057	1084	1126	1131	1115	1131	1126							
35	696	671	635	602	635	671	696	709	698	677	698	709							
40	402	390	369	349	369	390	402	402	390	374	390	402							
45	215	208	195	183	195	208	215	211	201	190	201	211							
50	105	101	93.4	86.1	93.4	101	105	99.8	91.2	83.5	91.2	99.8							
55	46.0	42.7	38.2	34.3	38.2	42.7	46.0	42.1	37.2	33.3	37.2	42.1							
60	20.5	19.2	17.5	16.2	17.5	19.2	20.5	19.8	18.6	17.5	18.6	19.8							
65	10.7	9.86	8.85	8.04	8.85	9.86	10.7	11.2	11.1	10.7	11.1	11.2							
70	5.01	4.39	3.69	3.15	3.69	4.39	5.01	5.02	4.76	4.42	4.76	5.02							
75	2.48	1.95	1.47	1.18	1.47	1.95	2.48	3.05	3.35	3.41	3.35	3.05							
80	2.09	1.56	1.11	0.84	1.11	1.56	2.09	2.85	3.31	3.46	3.31	2.85							
85	2.09	1.40	0.84	0.51	0.84	1.40	2.09	2.92	3.42	3.58	3.42	2.92							
90	2.28	1.51	0.89	0.53	0.89	1.51	2.28	3.22	3.80	4.00	3.80	3.22							
95	2.65	1.81	1.14	0.75	1.14	1.81	2.65	3.65	4.27	4.49	4.27	3.65							
100	3.01	2.12	1.40	0.99	1.40	2.12	3.01	4.07	4.72	4.94	4.72	4.07							
105	3.35	2.41	1.65	1.21	1.65	2.41	3.35	4.42	5.06	5.27	5.06	4.42							
110	3.61	2.65	1.87	1.42	1.87	2.65	3.61	4.65	5.27	5.47	5.27	4.65							
115	3.77	2.83	2.06	1.61	2.06	2.83	3.77	4.77	5.35	5.53	5.35	4.77							
120	3.87	2.97	2.23	1.80	2.23	2.97	3.87	4.78	5.31	5.47	5.31	4.78							
125	3.88	3.05	2.36	1.95	2.36	3.05	3.88	4.71	5.17	5.30	5.17	4.71							
130	3.84	3.08	2.45	2.07	2.45	3.08	3.84	4.57	4.98	5.09	4.98	4.57							
135	3.74	3.06	2.49	2.16	2.49	3.06	3.74	4.36	4.70	4.78	4.70	4.36							
140	3.56	2.98	2.48	2.18	2.48	2.98	3.56	4.09	4.37	4.43	4.37	4.09							
145	3.33	2.84	2.41	2.15	2.41	2.84	3.33	3.76	3.98	4.03	3.98	3.76							
150	3.06	2.66	2.30	2.09	2.30	2.66	3.06	3.38	3.54	3.56	3.54	3.38							
155	2.73	2.43	2.16	1.99	2.16	2.43	2.73	2.95	3.05	3.05	3.05	2.95							
160	2.39	2.18	1.99	1.87	1.99	2.18	2.39	2.53	2.58	2.58	2.58	2.53							
165	2.08	1.96	1.84	1.77	1.84	1.96	2.08	2.16	2.19	2.18	2.19	2.16							
170	1.88	1.80	1.73	1.69	1.73	1.80	1.88	1.92	1.93	1.93	1.93	1.92							
175	1.78	1.73	1.69	1.66	1.69	1.73	1.78	1.80	1.81	1.81	1.81	1.80							
180	1.78	1.75	1.74	1.73	1.74	1.75	1.78	1.77	1.77	1.77	1.77	1.77							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: