
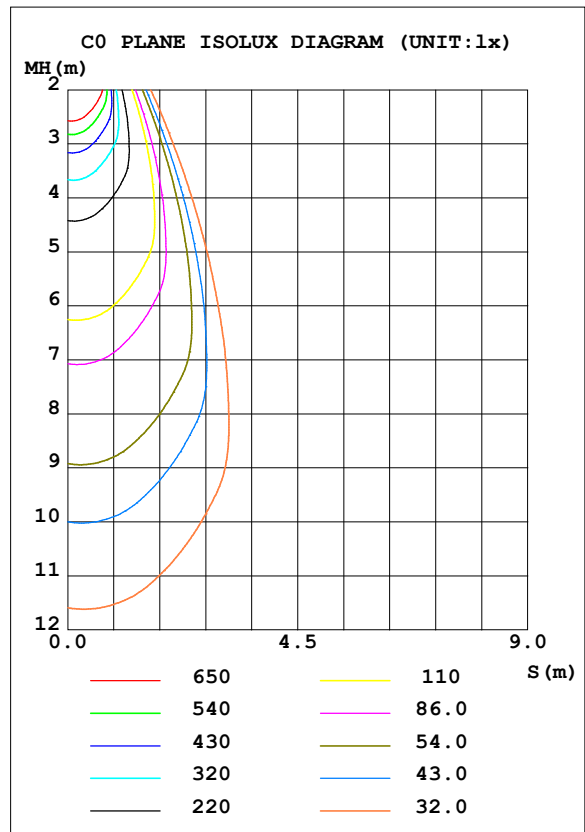


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.40V I:0.1520A P:30.400W PF:0.9660 Freq:50.00Hz		
Lamp Flux:2535.11x1 lm		
Name: NS77-30W	Type: LED	
MFR.: Lumega		

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	4326	S/MH (C0/180)	0.67
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/270)	0.68
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	2535.1	η UP, DN (C0-180)	0.3, 51.3
NOMINAL FLUX (lm)	2535.11	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 47.7
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220	η down (%)	99.0	CIBSE SHR MAX	0.70

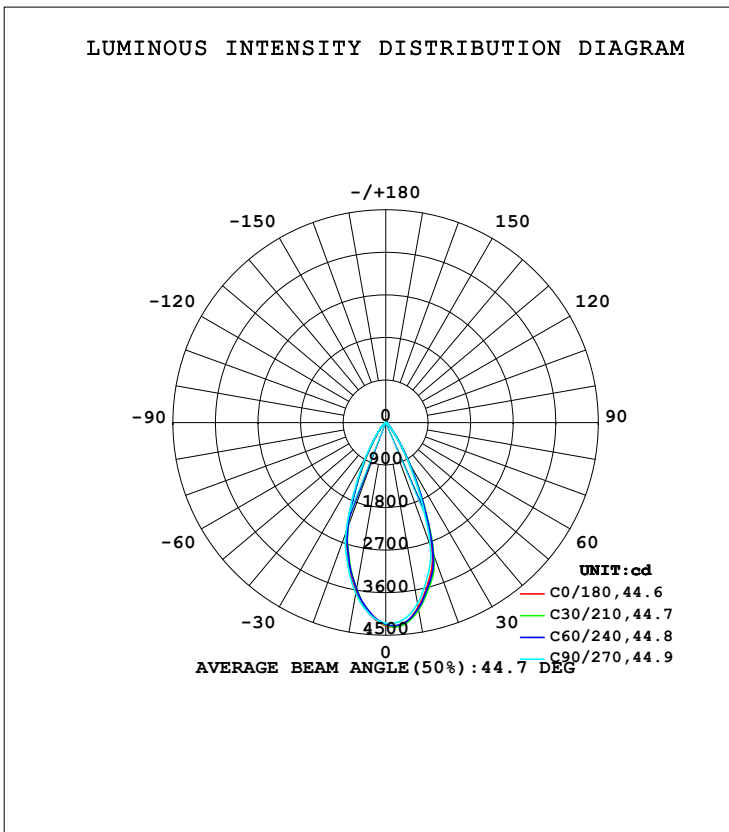

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3962	4003	3887	3693	3639	3571	3668	3794	0- 10	383.0	383.0	15.1,15.1
20	2865	2961	2768	2498	2417	2332	2468	2688	10- 20	903.7	1287	50.8,50.8
30	978.1	1053	965.9	826.1	804.2	801.1	873.7	947.0	20- 30	759.6	2046	80.7,80.7
40	238.1	258.4	238.7	204.7	199.3	212.4	235.2	247.6	30- 40	299.6	2346	92.5,92.5
50	67.28	75.54	71.14	66.15	68.02	67.64	71.65	74.22	40- 50	102.0	2448	96.6,96.6
60	24.52	26.95	27.04	26.29	27.60	25.88	27.65	27.92	50- 60	37.48	2485	98,98
70	4.643	5.468	5.291	5.290	7.822	7.679	7.435	7.476	60- 70	18.39	2504	98.8,98.8
80	0.5064	0.6294	0.6941	1.157	4.552	4.727	4.516	3.961	70- 80	3.629	2508	98.9,98.9
90	0.4587	0.5226	0.5702	1.162	5.173	5.374	5.182	4.650	80- 90	2.915	2510	99,99
100	1.095	1.138	1.204	1.921	6.300	6.488	6.265	5.719	90-100	3.628	2514	99.2,99.2
110	1.812	1.843	1.908	2.646	7.186	7.280	7.122	6.590	100-110	4.451	2519	99.3,99.3
120	2.399	2.433	2.475	3.123	7.124	7.198	7.079	6.718	110-120	4.699	2523	99.5,99.5
130	2.719	2.758	2.767	3.241	6.381	6.394	6.355	6.179	120-130	4.277	2527	99.7,99.7
140	2.665	2.710	2.701	2.980	5.111	5.055	5.076	5.053	130-140	3.340	2531	99.8,99.8
150	2.438	2.474	2.489	2.585	3.661	3.616	3.631	3.616	140-150	2.204	2533	99.9,99.9
160	2.251	2.269	2.293	2.305	2.609	2.578	2.579	2.565	150-160	1.273	2534	100,100
170	1.982	1.999	1.984	1.992	2.049	1.972	1.921	1.991	160-170	0.6276	2535	100,100
180	1.891	1.920	1.872	1.897	1.928	1.847	1.800	1.850	170-180	0.1833	2535	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.40V I:0.1520A P:30.400W PF:0.9660 Freq:50.00Hz		
Lamp Flux:2535.11x1 lm		
Name: NS77-30W	Type: LED	
MFR.: Lumega		

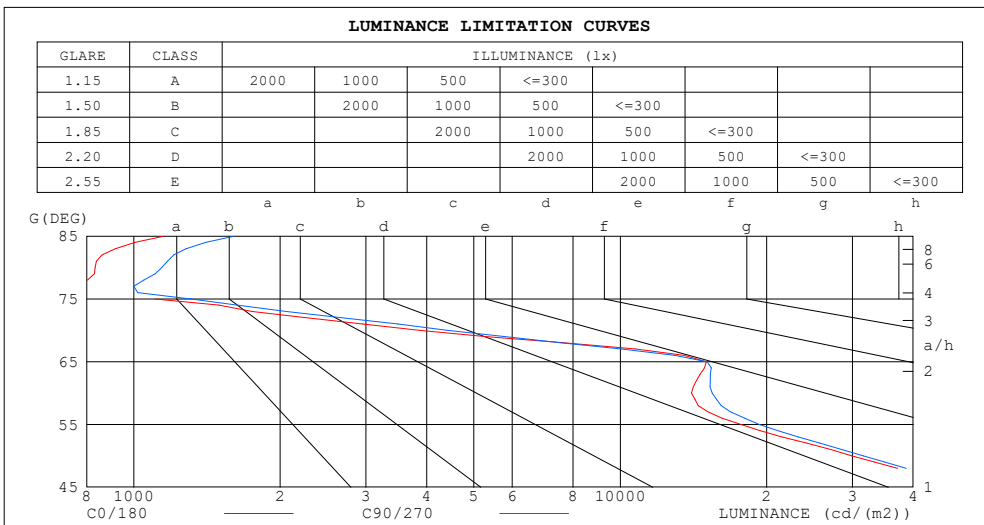

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1151	1606
80	833	1142
75	1106	1311
70	3878	4420
65	15026	15093
60	14014	15453
55	17726	19306
50	29905	31622
45	50251	51082


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.40V I:0.1520A P:30.400W PF:0.9660 Freq:50.00Hz		
Lamp Flux:2535.11x1 lm		
Name: NS77-30W	Type: LED	
MFR.: Lumega		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio									Coefficients of Utilization(CU)						
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.06	1.09	1.07	1.05	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.93	.91	.93	.91	.89	.88
3.0	.98	.93	.89	.96	.92	.88	.93	.90	.87	.91	.88	.85	.89	.86	.84	.83
4.0	.92	.87	.83	.91	.86	.82	.88	.84	.81	.86	.83	.80	.84	.82	.79	.78
5.0	.87	.81	.77	.86	.81	.77	.84	.80	.76	.82	.78	.76	.81	.77	.75	.73
6.0	.82	.77	.73	.81	.76	.72	.80	.75	.72	.78	.74	.71	.77	.73	.71	.69
7.0	.78	.72	.69	.77	.72	.68	.76	.71	.68	.75	.71	.68	.74	.70	.67	.66
8.0	.74	.69	.65	.73	.68	.65	.72	.68	.64	.71	.67	.64	.70	.67	.64	.62
9.0	.71	.65	.62	.70	.65	.61	.69	.64	.61	.68	.64	.61	.67	.63	.61	.59
10.0	.67	.62	.59	.67	.62	.58	.66	.61	.58	.65	.61	.58	.65	.61	.58	.57

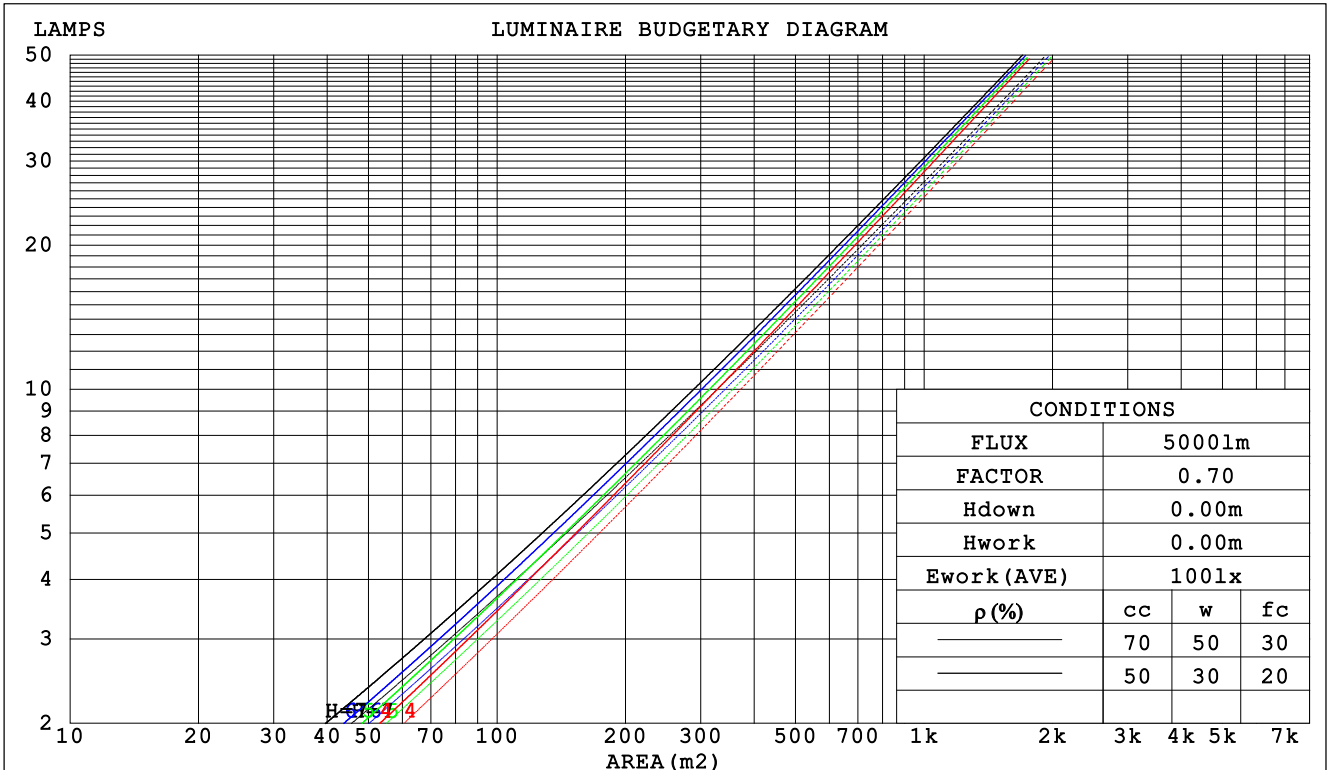

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.40V I:0.1520A P:30.400W PF:0.9660 Freq:50.00Hz		
Lamp Flux:2535.11x1 lm		
Name: NS77-30W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.169	.096	.031	.162	.093	.029	.149	.086	.027	.137	.079	.025	.126	.073	.024	
2.0	.161	.088	.027	.155	.085	.026	.144	.080	.025	.133	.075	.023	.124	.070	.022	
3.0	.152	.081	.024	.147	.079	.024	.138	.075	.023	.129	.071	.022	.121	.067	.021	
4.0	.144	.075	.022	.140	.073	.022	.132	.070	.021	.124	.067	.020	.117	.064	.019	
5.0	.137	.070	.020	.133	.068	.020	.126	.066	.019	.119	.063	.019	.113	.061	.018	
6.0	.130	.065	.019	.127	.064	.018	.121	.062	.018	.115	.060	.018	.110	.058	.017	
7.0	.124	.061	.017	.121	.060	.017	.116	.059	.017	.111	.057	.017	.106	.055	.016	
8.0	.119	.058	.016	.116	.057	.016	.111	.056	.016	.107	.054	.016	.102	.053	.015	
9.0	.114	.055	.015	.111	.054	.015	.107	.053	.015	.103	.052	.015	.099	.050	.015	
10.0	.109	.052	.015	.107	.052	.014	.103	.050	.014	.099	.049	.014	.096	.048	.014	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.178	.165	.153	.152	.141	.132	.104	.097	.091	.060	.056	.053	.019	.018	.017	
2.0	.162	.140	.121	.139	.121	.105	.095	.083	.073	.055	.049	.043	.018	.016	.014	
3.0	.149	.121	.099	.128	.104	.085	.088	.073	.060	.051	.042	.035	.016	.014	.012	
4.0	.139	.106	.082	.119	.092	.071	.082	.064	.050	.047	.037	.030	.015	.012	.010	
5.0	.129	.094	.069	.111	.082	.060	.077	.057	.042	.044	.034	.025	.014	.011	.008	
6.0	.122	.085	.059	.105	.074	.051	.072	.052	.036	.042	.030	.022	.014	.010	.007	
7.0	.115	.077	.051	.099	.067	.044	.068	.047	.032	.040	.028	.019	.013	.009	.006	
8.0	.109	.071	.045	.094	.062	.039	.065	.043	.028	.038	.026	.017	.012	.008	.005	
9.0	.104	.066	.040	.089	.057	.035	.062	.040	.025	.036	.024	.015	.012	.008	.005	
10.0	.099	.061	.036	.086	.053	.031	.059	.037	.022	.035	.022	.013	.011	.007	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.40V I:0.1520A P:30.400W PF:0.9660 Freq:50.00Hz		
Lamp Flux:2535.11x1 lm		
Name: NS77-30W	Type: LED	
MFR.: Lumega		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.8	21.6	21.0	21.8	22.0	20.8	21.6	21.0	21.8	22.0
3H	20.7	21.5	21.0	21.7	21.9	20.7	21.5	21.0	21.7	21.9
4H	20.6	21.4	20.9	21.6	21.9	20.6	21.4	20.9	21.6	21.8
6H	20.5	21.3	20.9	21.5	21.8	20.5	21.2	20.8	21.5	21.8
8H	20.5	21.2	20.8	21.5	21.7	20.5	21.2	20.8	21.4	21.7
12H	20.5	21.1	20.8	21.4	21.7	20.4	21.1	20.8	21.4	21.7
4H 2H	20.6	21.4	20.9	21.6	21.9	20.6	21.4	20.9	21.6	21.9
3H	20.6	21.2	20.9	21.5	21.8	20.6	21.2	20.9	21.5	21.8
4H	20.5	21.1	20.9	21.4	21.7	20.5	21.1	20.8	21.4	21.7
6H	20.4	20.9	20.8	21.3	21.6	20.4	20.9	20.8	21.3	21.6
8H	20.3	20.8	20.8	21.2	21.6	20.3	20.8	20.7	21.2	21.6
12H	20.3	20.7	20.7	21.1	21.5	20.3	20.7	20.7	21.1	21.5
8H 4H	20.3	20.8	20.8	21.2	21.6	20.3	20.8	20.7	21.2	21.6
6H	20.2	20.6	20.7	21.1	21.5	20.2	20.6	20.7	21.0	21.5
8H	20.2	20.5	20.6	21.0	21.4	20.2	20.5	20.6	21.0	21.4
12H	20.1	20.4	20.6	20.9	21.4	20.1	20.4	20.6	20.9	21.4
12H 4H	20.3	20.7	20.7	21.1	21.5	20.3	20.7	20.7	21.1	21.5
6H	20.2	20.5	20.6	21.0	21.4	20.2	20.5	20.6	21.0	21.4
8H	20.1	20.4	20.6	20.9	21.4	20.1	20.4	20.6	20.9	21.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.6 / - 6.2					+ 2.5 / - 5.8				
1.5H	+ 4.2 / - 4.9					+ 4.1 / - 4.7				
2.0H	+ 4.0 / - 3.4					+ 3.9 / - 2.9				

CIE Pub.117, 2535 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.2)
 Area: 0.0035 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.40V I:0.1520A P:30.400W PF:0.9660 Freq:50.00Hz		
Lamp Flux:2535.11x1 lm		
Name: NS77-30W	Type: LED	
MFR.: Lumega		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	77	86	80	77	85	80	76	73
0.80	94	88	85	94	88	85	92	87	84	80
1.00	99	93	89	98	93	89	96	92	89	85
1.25	103	98	94	102	97	94	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	113	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	108	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.40V I:0.1520A P:30.400W PF:0.9660 Freq:50.00Hz		
Lamp Flux:2535.11x1 lm		
Name: NS77-30W	Type: LED	
MFR.: Lumega		

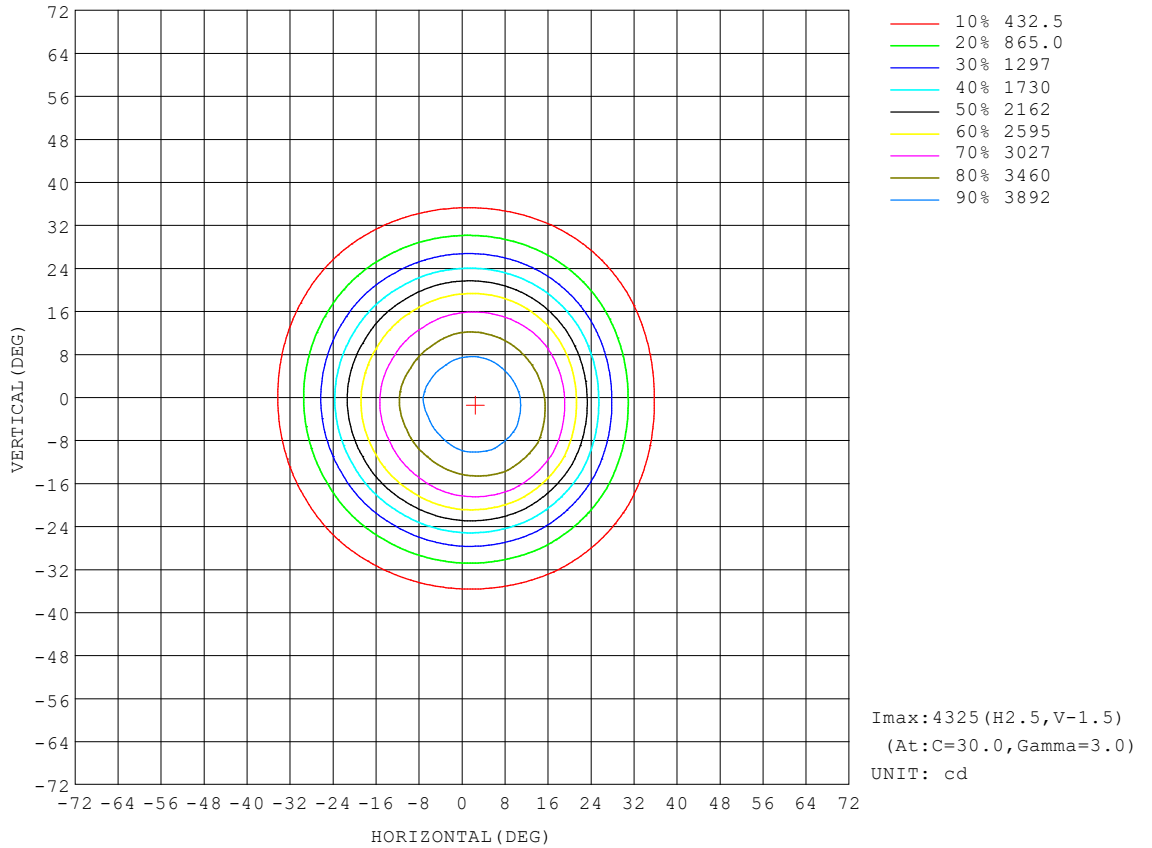


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

AAI Figure

Test:U:220.40V I:0.1520A P:30.400W PF:0.9660 Freq:50.00Hz		
Lamp Flux:2535.11x1 lm		
Name: NS77-30W	Type: LED	
MFR.: Lumega		

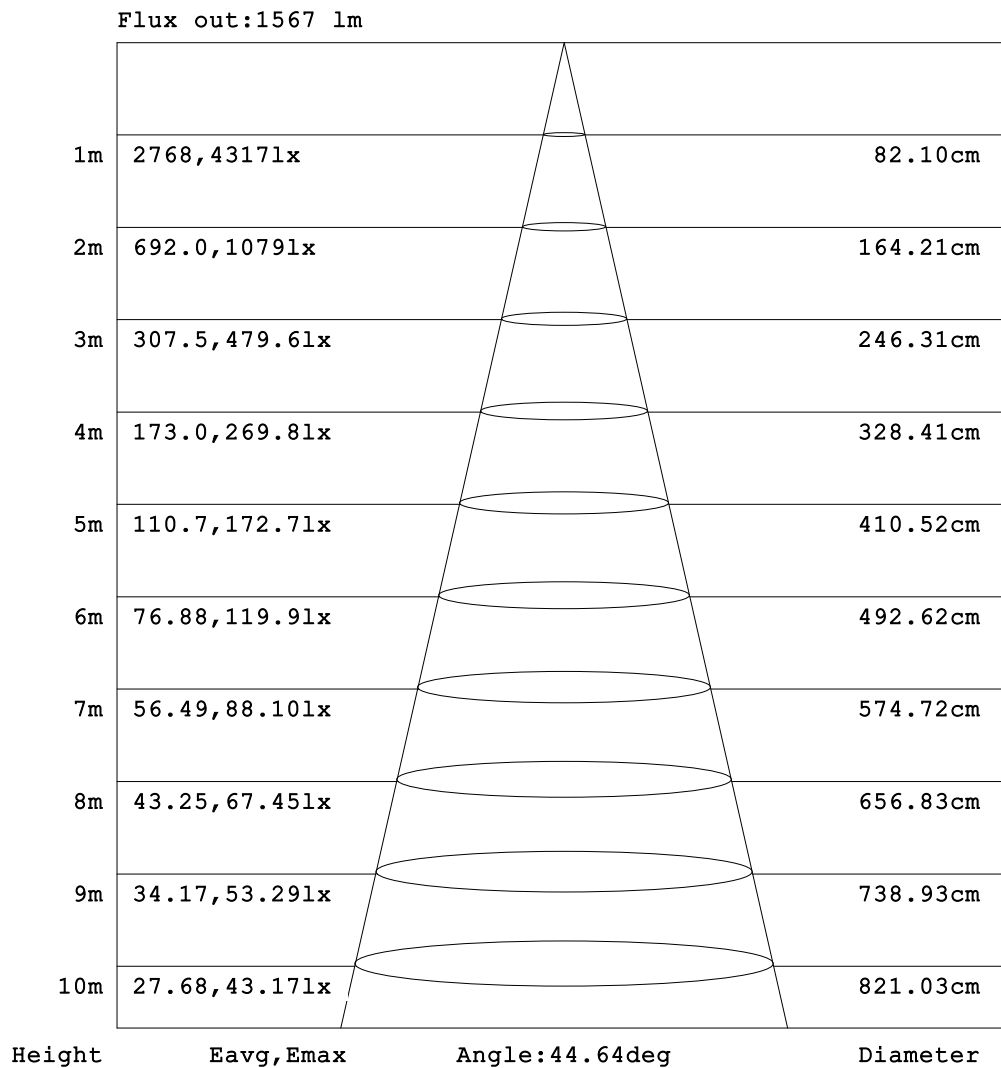


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.40V I:0.1520A P:30.400W PF:0.9660 Freq:50.00Hz Lamp Flux:2535.11x1 lm		
Name: NS77-30W	Type: LED	
MFR.: Lumega		

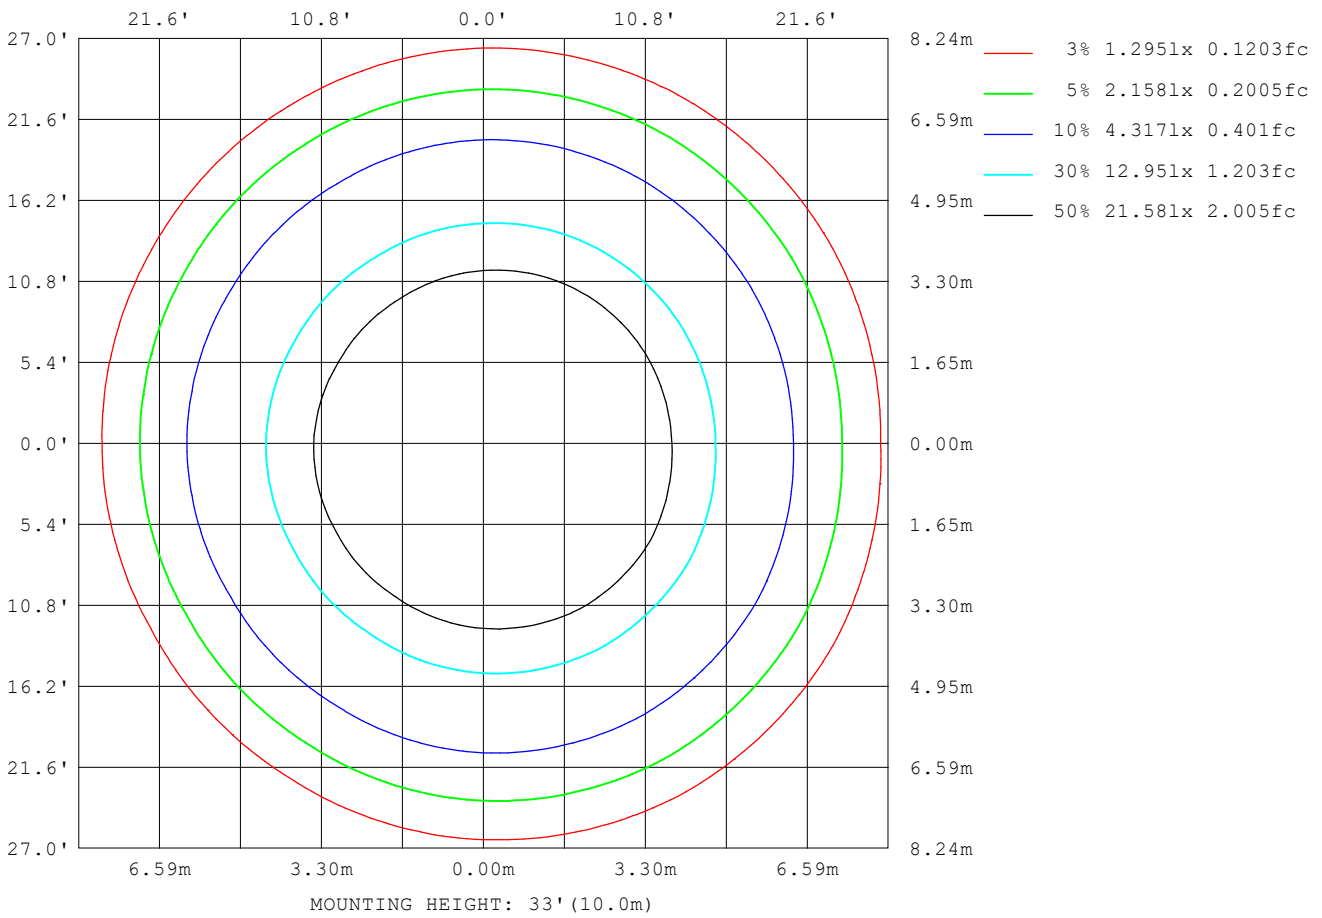

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

Planar Illuminance Curve

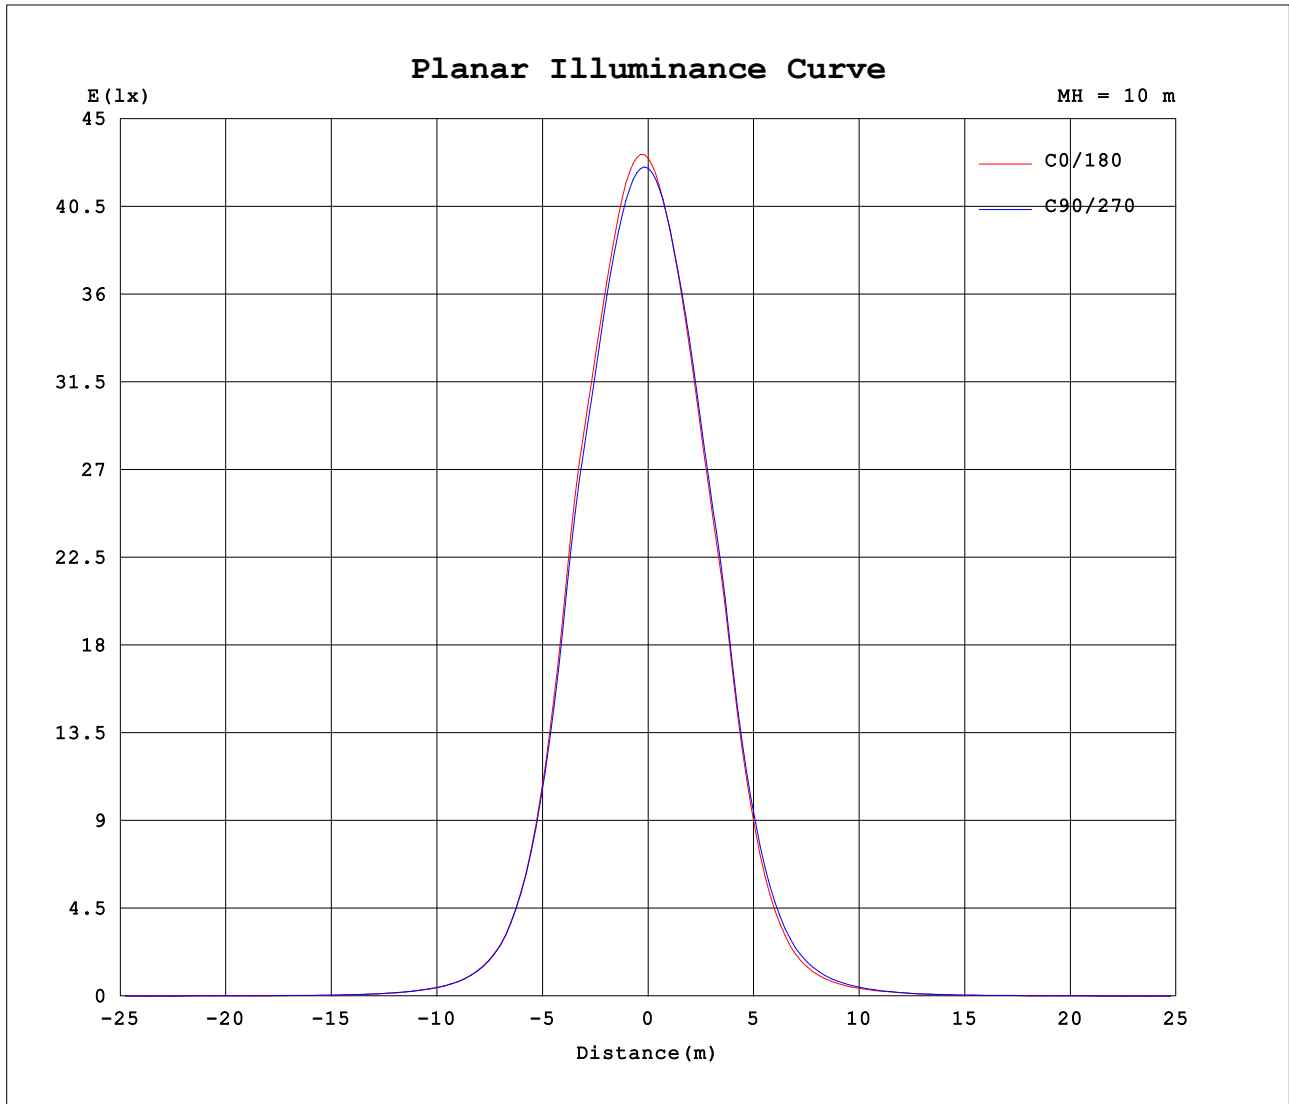

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.40V I:0.1520A P:30.400W PF:0.9660 Freq:50.00Hz		
Lamp Flux:2535.11x1 lm		
Name: NS77-30W	Type: LED	
MFR.: Lumega		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	4299	4281	4264	4247	4216	4239	4299	4287	4264	4247	4216	4227							
5	4275	4294	4262	4187	4087	4044	4057	4017	4013	4057	4102	4172							
10	3962	4018	3988	3887	3735	3651	3639	3567	3574	3668	3747	3842							
15	3495	3587	3544	3396	3220	3106	3062	2993	3007	3112	3233	3362							
20	2865	2984	2939	2768	2557	2439	2417	2326	2337	2468	2619	2757							
25	1814	1925	1897	1762	1588	1500	1502	1454	1466	1553	1668	1761							
30	978	1058	1048	966	854	798	804	790	813	874	929	966							
35	479	527	521	474	417	386	389	394	414	446	471	484							
40	238	259	258	239	212	197	199	206	219	235	247	249							
45	124	138	137	126	116	112	114	116	122	131	136	135							
50	67.3	75.3	75.8	71.1	66.6	65.7	68.0	67.1	68.2	71.7	74.7	73.7							
55	35.6	39.5	40.3	38.8	37.6	38.1	39.4	38.0	37.8	39.3	40.5	39.5							
60	24.5	26.6	27.3	27.0	26.1	26.5	27.6	25.9	25.8	27.6	28.4	27.5							
65	22.2	24.4	24.4	22.3	18.7	18.1	19.9	17.8	17.9	21.2	24.7	25.5							
70	4.64	5.38	5.55	5.29	4.79	5.79	7.82	7.83	7.52	7.44	7.84	7.11							
75	1.00	1.20	1.24	1.19	1.07	2.45	4.78	4.93	4.72	4.64	4.62	3.55							
80	0.51	0.60	0.66	0.69	0.42	1.89	4.55	4.82	4.63	4.52	4.55	3.37							
85	0.35	0.42	0.47	0.49	0.21	1.83	4.76	5.05	4.84	4.75	4.85	3.57							
90	0.46	0.50	0.54	0.57	0.28	2.04	5.17	5.48	5.27	5.18	5.33	3.97							
95	0.74	0.77	0.81	0.85	0.59	2.44	5.72	6.03	5.80	5.70	5.89	4.46							
100	1.09	1.12	1.16	1.20	0.95	2.89	6.30	6.61	6.36	6.27	6.46	4.98							
105	1.47	1.48	1.51	1.56	1.30	3.33	6.87	7.13	6.85	6.80	7.00	5.47							
110	1.81	1.83	1.86	1.91	1.64	3.65	7.19	7.42	7.14	7.12	7.35	5.83							
115	2.14	2.15	2.17	2.22	1.95	3.88	7.25	7.46	7.19	7.19	7.46	6.02							
120	2.40	2.42	2.45	2.47	2.23	4.01	7.12	7.32	7.08	7.08	7.38	6.05							
125	2.60	2.63	2.65	2.66	2.42	4.02	6.83	6.99	6.77	6.80	7.13	5.95							
130	2.72	2.75	2.77	2.77	2.55	3.94	6.38	6.49	6.30	6.36	6.69	5.67							
135	2.74	2.78	2.79	2.78	2.58	3.74	5.80	5.84	5.67	5.78	6.09	5.25							
140	2.66	2.70	2.72	2.70	2.51	3.44	5.11	5.13	4.98	5.08	5.38	4.72							
145	2.54	2.57	2.59	2.58	2.41	3.11	4.38	4.38	4.27	4.35	4.59	4.10							
150	2.44	2.46	2.48	2.49	2.36	2.81	3.66	3.65	3.58	3.63	3.78	3.45							
155	2.36	2.38	2.40	2.41	2.33	2.57	3.04	3.05	3.03	3.06	3.12	2.92							
160	2.25	2.26	2.28	2.29	2.24	2.37	2.61	2.59	2.56	2.58	2.61	2.52							
165	2.14	2.13	2.14	2.15	2.11	2.15	2.25	2.23	2.21	2.22	2.22	2.20							
170	1.98	2.00	2.00	1.98	1.98	2.01	2.05	2.00	1.94	1.92	1.98	2.01							
175	1.89	1.92	1.90	1.88	1.89	1.92	1.94	1.89	1.83	1.79	1.87	1.92							
180	1.89	1.93	1.91	1.87	1.88	1.91	1.93	1.87	1.82	1.80	1.83	1.87							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: