
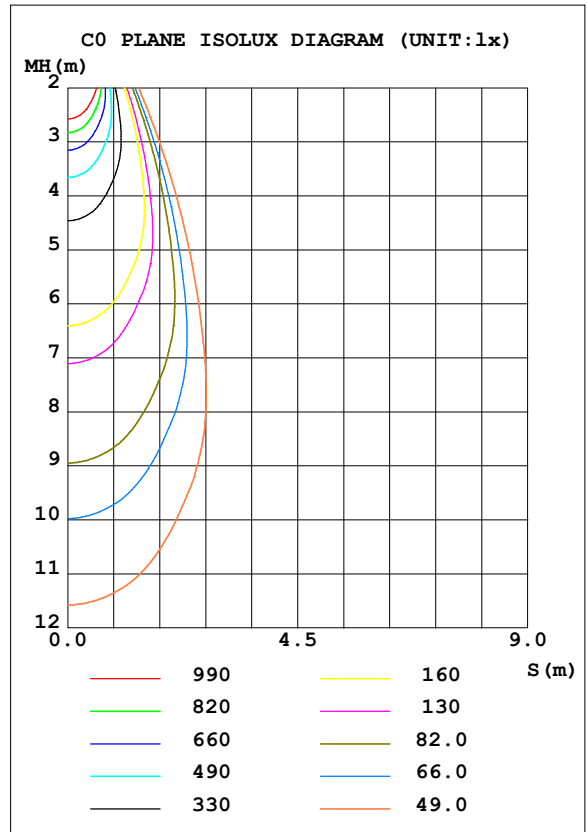


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.40V I:0.1940A P:41.700W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3106.45x1 lm		
Name: NS77-40W	Type: LED	
MFR.: Lumega		

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	6567	S/MH (C0/180)	0.65
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	0.62
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	3106.4	η UP, DN (C0-180)	0.3, 49.9
NOMINAL FLUX (lm)	3106.45	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 49.1
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220	η down (%)	99.0	CIBSE SHR MAX	0.65

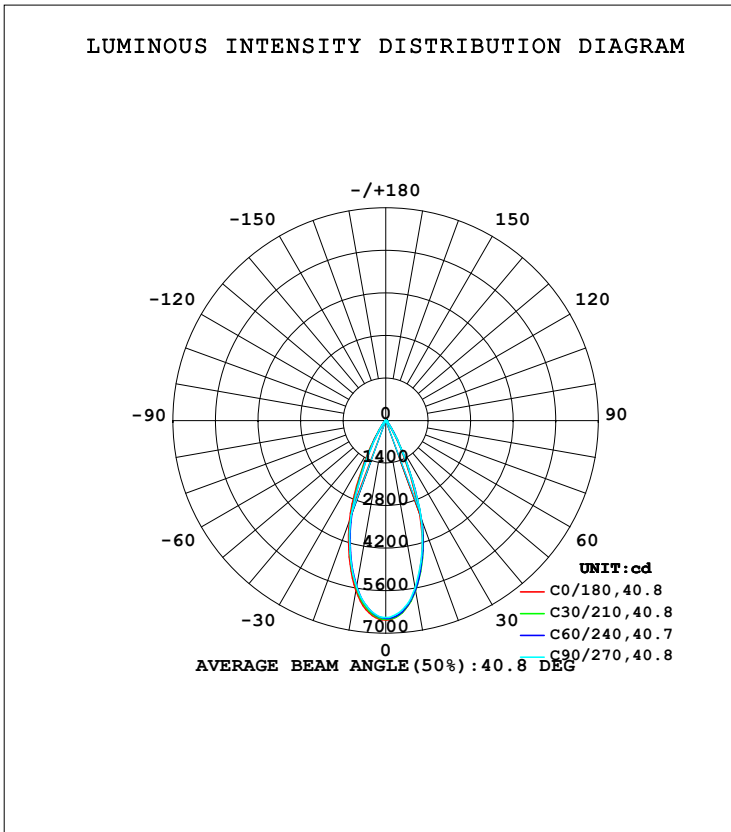

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5629	5664	5581	5566	5684	5558	5548	5560	0- 10	577.7	577.7	18.6,18.6
20	3265	3428	3398	3376	3501	3313	3325	3241	10- 20	1255	1832	59,59
30	807.7	889.7	902.4	929.6	993.2	846.3	775.7	798.3	20- 30	870.5	2703	87,87
40	151.4	169.6	174.1	175.1	183.8	153.8	147.0	149.2	30- 40	250.7	2954	95.1,95.1
50	38.41	43.10	44.80	45.36	48.98	44.59	42.25	41.18	40- 50	66.70	3020	97.2,97.2
60	22.75	26.16	26.69	27.23	27.73	27.01	23.35	23.68	50- 60	28.94	3049	98.2,98.2
70	3.399	4.467	4.897	6.177	9.738	8.308	7.616	6.760	60- 70	18.82	3068	98.8,98.8
80	0.4045	0.4584	0.4848	1.123	5.369	5.584	5.416	4.946	70- 80	3.647	3072	98.9,98.9
90	0.5462	0.5521	0.5488	1.283	6.537	6.762	6.594	6.071	80- 90	3.575	3075	99,99
100	1.456	1.443	1.439	2.255	7.751	8.006	7.823	7.300	90-100	4.516	3080	99.1,99.1
110	2.488	2.486	2.493	3.363	9.112	9.255	9.012	8.444	100-110	5.613	3085	99.3,99.3
120	3.217	3.251	3.251	4.055	9.441	9.481	9.231	8.708	110-120	6.115	3091	99.5,99.5
130	3.426	3.492	3.487	4.141	8.541	8.480	8.270	7.863	120-130	5.595	3097	99.7,99.7
140	3.173	3.261	3.266	3.704	6.604	6.474	6.265	6.028	130-140	4.238	3101	99.8,99.8
150	2.959	3.021	3.053	3.233	4.488	4.328	4.132	4.011	140-150	2.667	3104	99.9,99.9
160	2.764	2.814	2.888	2.904	3.201	3.103	3.022	2.913	150-160	1.526	3105	100,100
170	2.323	2.377	2.384	2.429	2.493	2.402	2.296	2.284	160-170	0.7586	3106	100,100
180	2.207	2.261	2.188	2.220	2.252	2.231	2.115	2.174	170-180	0.2166	3106	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.40V I:0.1940A P:41.700W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3106.45x1 lm		
Name: NS77-40W	Type: LED	
MFR.: Lumega		

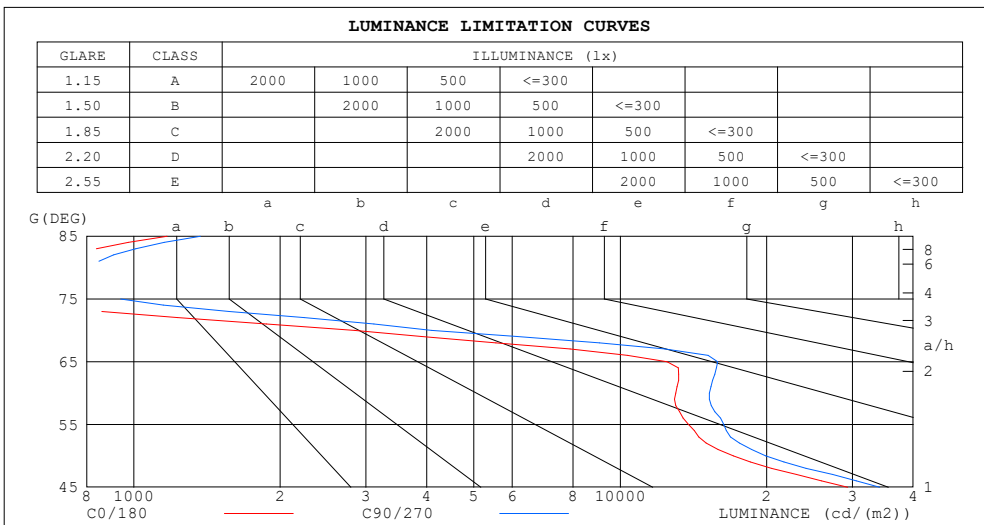

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1172	1371
80	665	798
75	551	940
70	2839	4091
65	12476	15852
60	13000	15251
55	13813	16325
50	17072	19914
45	29338	34157


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.40V I:0.1940A P:41.700W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3106.45x1 lm		
Name: NS77-40W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.05	1.01	.98	1.03	.00	.97	.00	.97	.95	.97	.95	.93	.94	.92	.91	.89
3.0	.99	.95	.91	.98	.94	.90	.95	.92	.89	.92	.90	.87	.90	.88	.86	.85
4.0	.94	.89	.85	.93	.88	.85	.91	.87	.84	.88	.85	.83	.87	.84	.82	.80
5.0	.89	.84	.80	.88	.84	.80	.86	.82	.79	.85	.81	.79	.83	.80	.78	.76
6.0	.85	.80	.76	.84	.79	.76	.83	.78	.75	.81	.78	.75	.80	.77	.74	.73
7.0	.81	.76	.72	.80	.76	.72	.79	.75	.72	.78	.74	.71	.77	.73	.71	.70
8.0	.78	.72	.69	.77	.72	.69	.76	.72	.68	.75	.71	.68	.74	.70	.68	.67
9.0	.74	.69	.66	.74	.69	.66	.73	.68	.65	.72	.68	.65	.71	.68	.65	.64
10.0	.71	.66	.63	.71	.66	.63	.70	.66	.63	.69	.65	.62	.68	.65	.62	.61

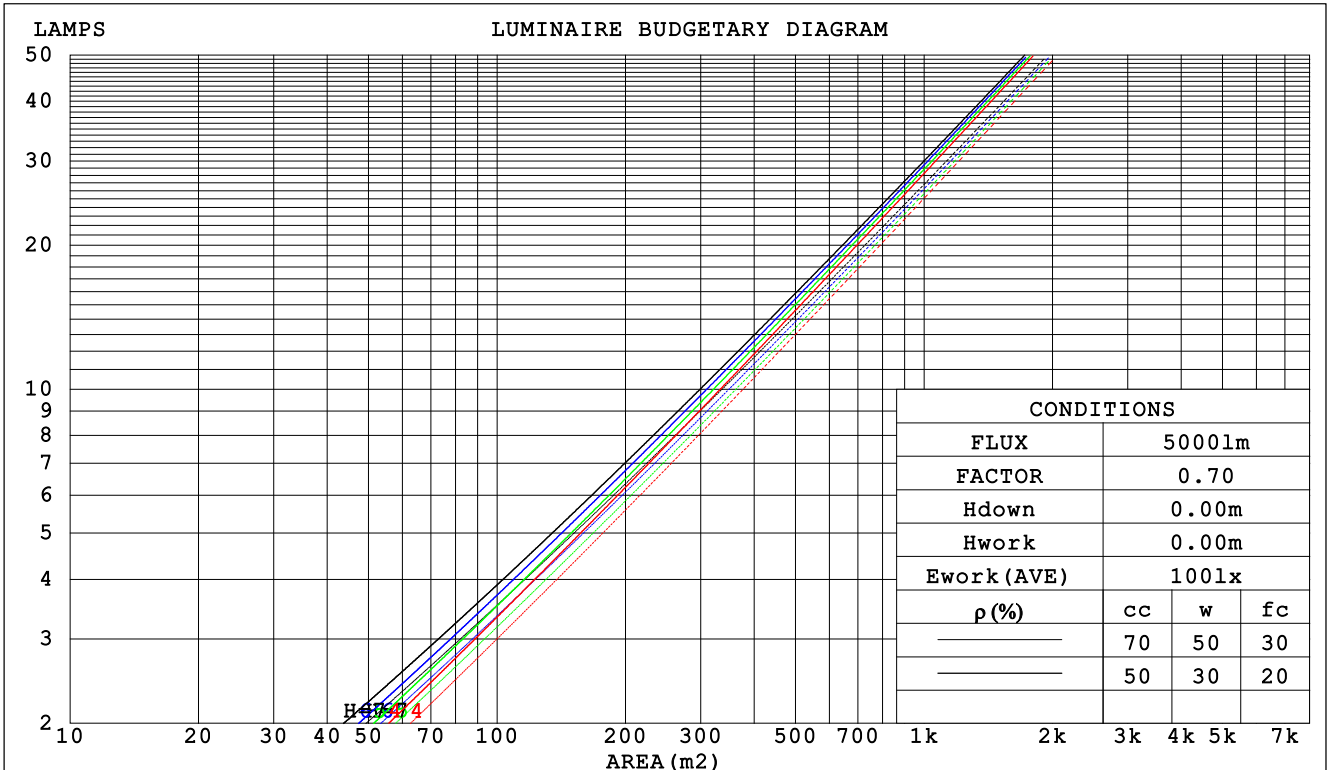

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.40V I:0.1940A P:41.700W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3106.45x1 lm		
Name: NS77-40W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.160	.091	.029	.153	.088	.028	.140	.081	.026	.128	.074	.024	.117	.068	.022	
2.0	.151	.083	.025	.145	.080	.025	.134	.075	.023	.124	.070	.022	.115	.065	.020	
3.0	.142	.076	.023	.137	.073	.022	.128	.069	.021	.119	.065	.020	.111	.062	.019	
4.0	.134	.070	.021	.130	.068	.020	.122	.065	.019	.115	.062	.019	.108	.059	.018	
5.0	.127	.065	.019	.124	.064	.019	.117	.061	.018	.110	.058	.017	.104	.056	.017	
6.0	.121	.061	.017	.118	.060	.017	.112	.057	.017	.106	.055	.016	.101	.053	.016	
7.0	.116	.057	.016	.113	.056	.016	.107	.054	.016	.102	.052	.015	.098	.051	.015	
8.0	.110	.054	.015	.108	.053	.015	.103	.052	.015	.099	.050	.014	.095	.049	.014	
9.0	.106	.051	.014	.104	.050	.014	.099	.049	.014	.095	.048	.014	.092	.046	.013	
10.0	.102	.049	.014	.100	.048	.013	.096	.047	.013	.092	.046	.013	.089	.045	.013	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.116	.116	.116	.066	.066	.066	.021	.021	.021	
1.0	.178	.165	.154	.152	.142	.132	.104	.098	.092	.060	.056	.053	.019	.018	.017	
2.0	.161	.140	.123	.138	.121	.106	.095	.084	.074	.055	.049	.043	.018	.016	.014	
3.0	.148	.121	.100	.127	.105	.087	.087	.073	.061	.050	.042	.036	.016	.014	.012	
4.0	.136	.106	.083	.117	.092	.072	.080	.064	.051	.047	.037	.030	.015	.012	.010	
5.0	.127	.094	.070	.109	.082	.061	.075	.057	.043	.043	.033	.026	.014	.011	.008	
6.0	.119	.085	.060	.102	.073	.053	.070	.051	.037	.041	.030	.022	.013	.010	.007	
7.0	.112	.077	.052	.096	.067	.046	.067	.047	.032	.039	.028	.019	.012	.009	.006	
8.0	.106	.071	.046	.091	.061	.040	.063	.043	.029	.037	.025	.017	.012	.008	.006	
9.0	.101	.065	.041	.087	.057	.036	.060	.040	.026	.035	.023	.015	.011	.008	.005	
10.0	.096	.061	.037	.083	.053	.032	.057	.037	.023	.033	.022	.014	.011	.007	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.40V I:0.1940A P:41.700W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3106.45x1 lm		
Name: NS77-40W	Type: LED	
MFR.: Lumega		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.7	18.5	18.0	18.7	18.9	18.3	19.1	18.5	19.2	19.4
3H	17.7	18.5	18.0	18.7	18.9	18.3	19.0	18.6	19.3	19.5
4H	17.6	18.3	17.9	18.6	18.8	18.2	18.9	18.5	19.2	19.4
6H	17.6	18.2	17.9	18.5	18.7	18.1	18.8	18.4	19.0	19.3
8H	17.5	18.1	17.8	18.4	18.7	18.1	18.7	18.4	19.0	19.3
12H	17.5	18.1	17.8	18.4	18.6	18.0	18.6	18.4	18.9	19.2
4H 2H	17.7	18.4	18.0	18.6	18.9	18.2	18.9	18.5	19.1	19.4
3H	17.7	18.3	18.0	18.6	18.9	18.2	18.8	18.6	19.1	19.4
4H	17.6	18.1	17.9	18.4	18.8	18.1	18.7	18.5	19.0	19.3
6H	17.5	18.0	17.9	18.3	18.7	18.0	18.5	18.4	18.9	19.2
8H	17.4	17.9	17.8	18.2	18.6	18.0	18.4	18.4	18.8	19.2
12H	17.4	17.8	17.8	18.2	18.6	17.9	18.3	18.3	18.7	19.1
8H 4H	17.4	17.9	17.8	18.2	18.6	18.0	18.4	18.4	18.8	19.2
6H	17.3	17.7	17.8	18.1	18.5	17.9	18.2	18.3	18.7	19.1
8H	17.3	17.6	17.7	18.0	18.5	17.8	18.1	18.3	18.6	19.0
12H	17.2	17.5	17.7	17.9	18.4	17.8	18.0	18.2	18.5	19.0
12H 4H	17.4	17.8	17.8	18.2	18.6	17.9	18.3	18.3	18.7	19.1
6H	17.3	17.6	17.7	18.0	18.5	17.8	18.1	18.3	18.6	19.0
8H	17.2	17.5	17.7	17.9	18.4	17.8	18.0	18.2	18.5	19.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.5 / - 4.5					+ 2.7 / - 4.3				
1.5H	+ 4.4 / - 3.6					+ 4.7 / - 3.9				
2.0H	+ 2.5 / - 1.7					+ 2.9 / - 2.0				

CIE Pub.117, 3106 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.9)
 Area: 0.0035 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.40V I:0.1940A P:41.700W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3106.45x1 lm		
Name: NS77-40W	Type: LED	
MFR.: Lumega		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	82	79	88	82	79	87	82	79	75
0.80	96	90	86	95	90	86	94	89	86	82
1.00	100	94	91	99	94	91	97	94	90	86
1.25	104	99	95	102	98	95	100	97	94	90
1.50	106	102	98	105	101	98	103	99	97	92
2.00	109	105	101	107	103	101	104	101	99	94
2.50	110	107	104	109	105	103	105	103	101	95
3.00	112	108	106	110	107	105	106	104	102	96
4.00	114	111	109	112	109	107	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.40V I:0.1940A P:41.700W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3106.45x1 lm		
Name: NS77-40W	Type: LED	
MFR.: Lumega		

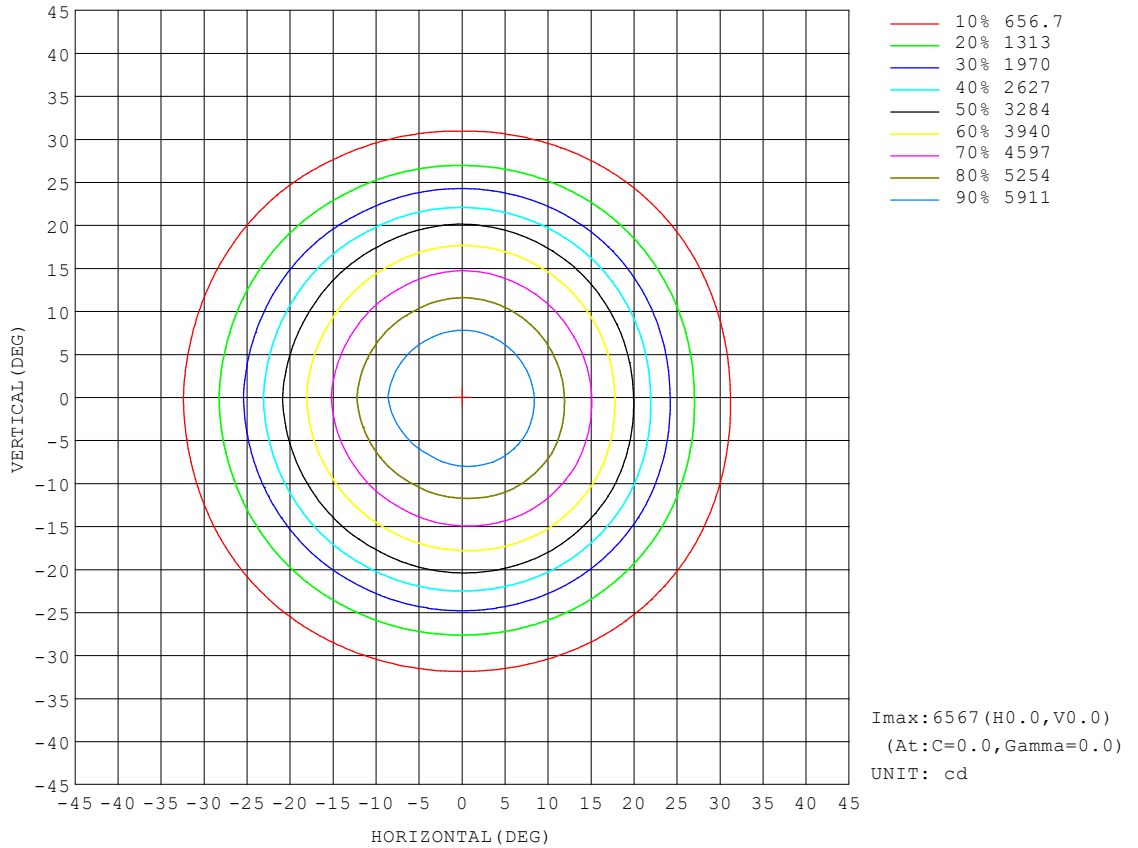


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

AAI Figure

Test:U:220.40V I:0.1940A P:41.700W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3106.45x1 lm		
Name: NS77-40W	Type: LED	
MFR.: Lumega		

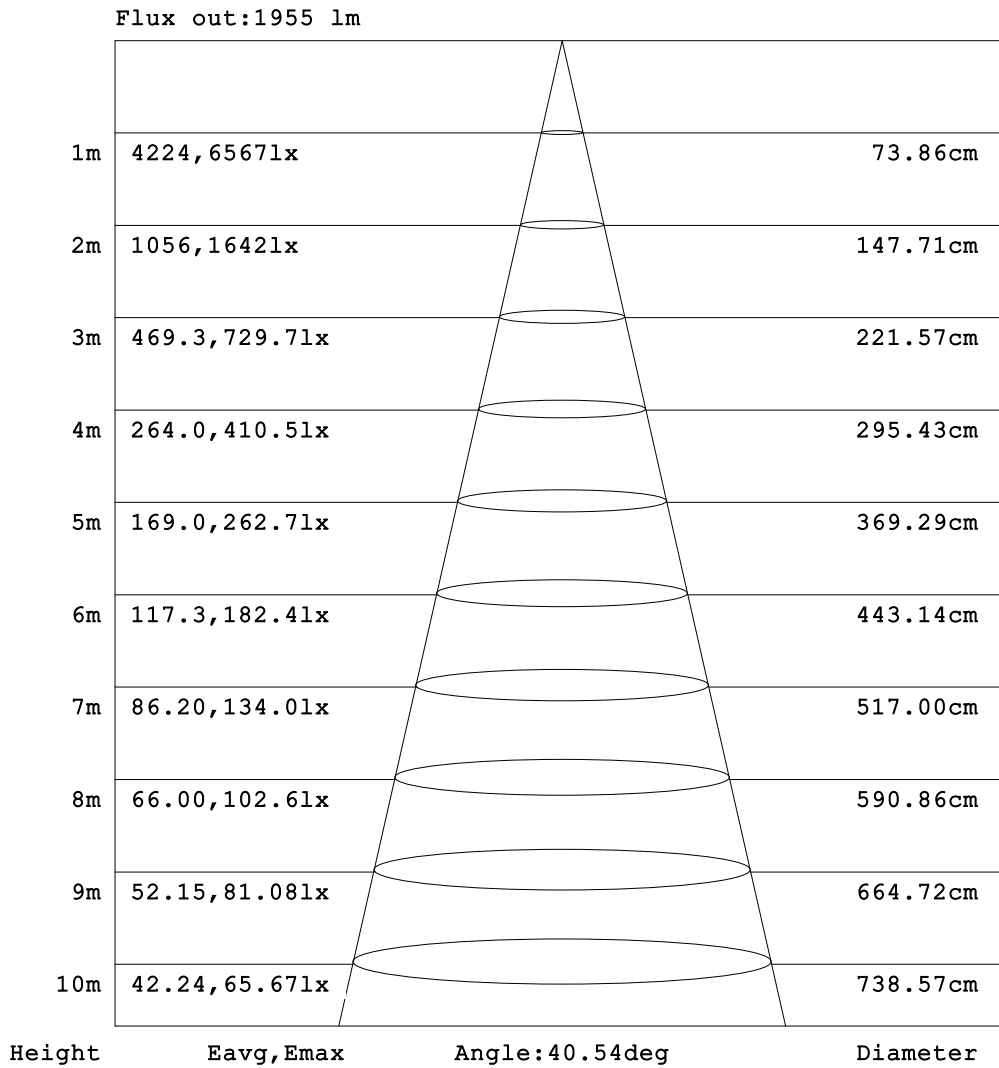


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.40V I:0.1940A P:41.700W PF:0.9730 Freq:50.00Hz Lamp Flux:3106.45x1 lm		
Name: NS77-40W	Type: LED	
MFR.: Lumega		

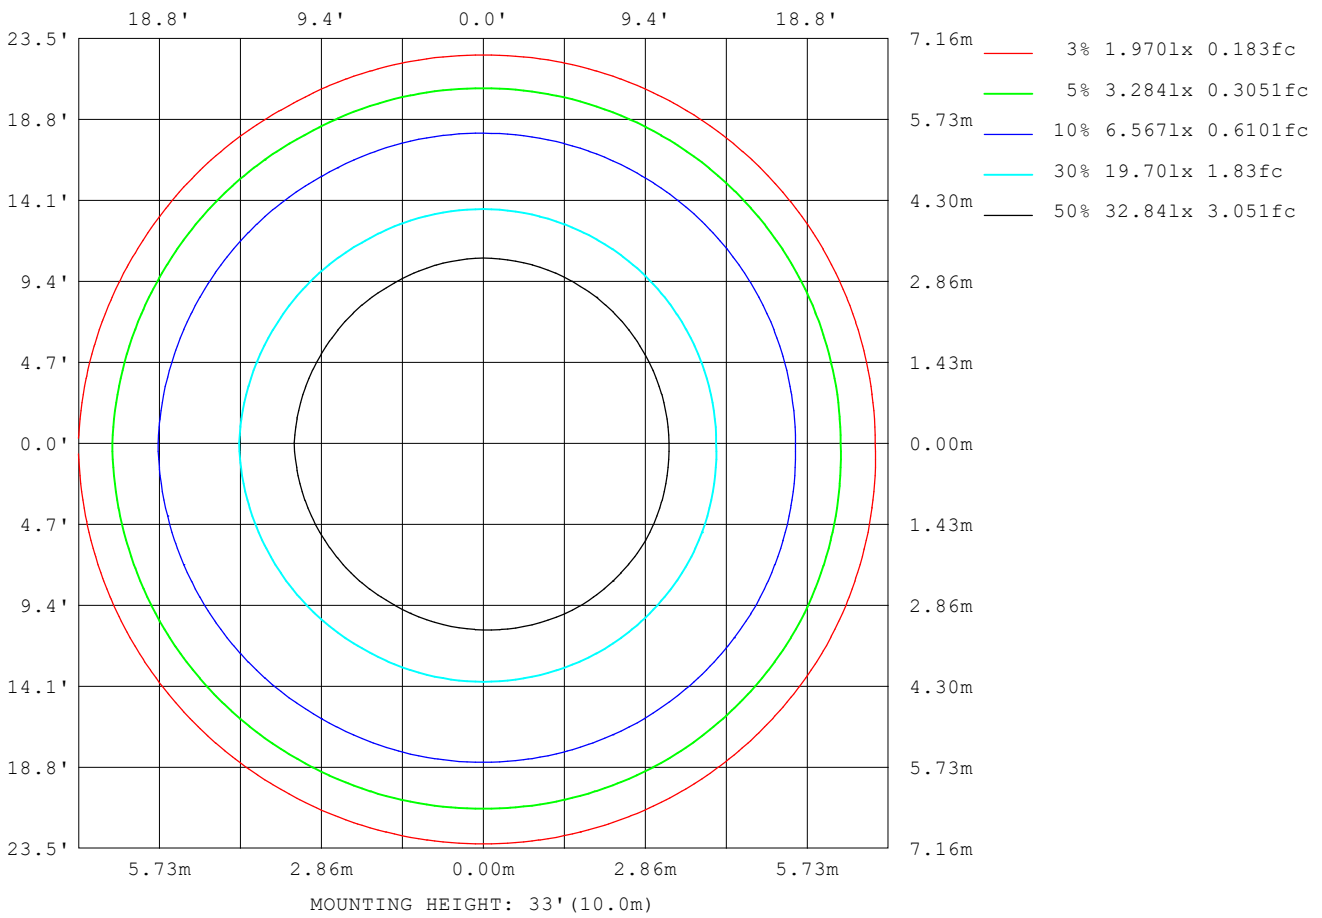

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

Planar Illuminance Curve

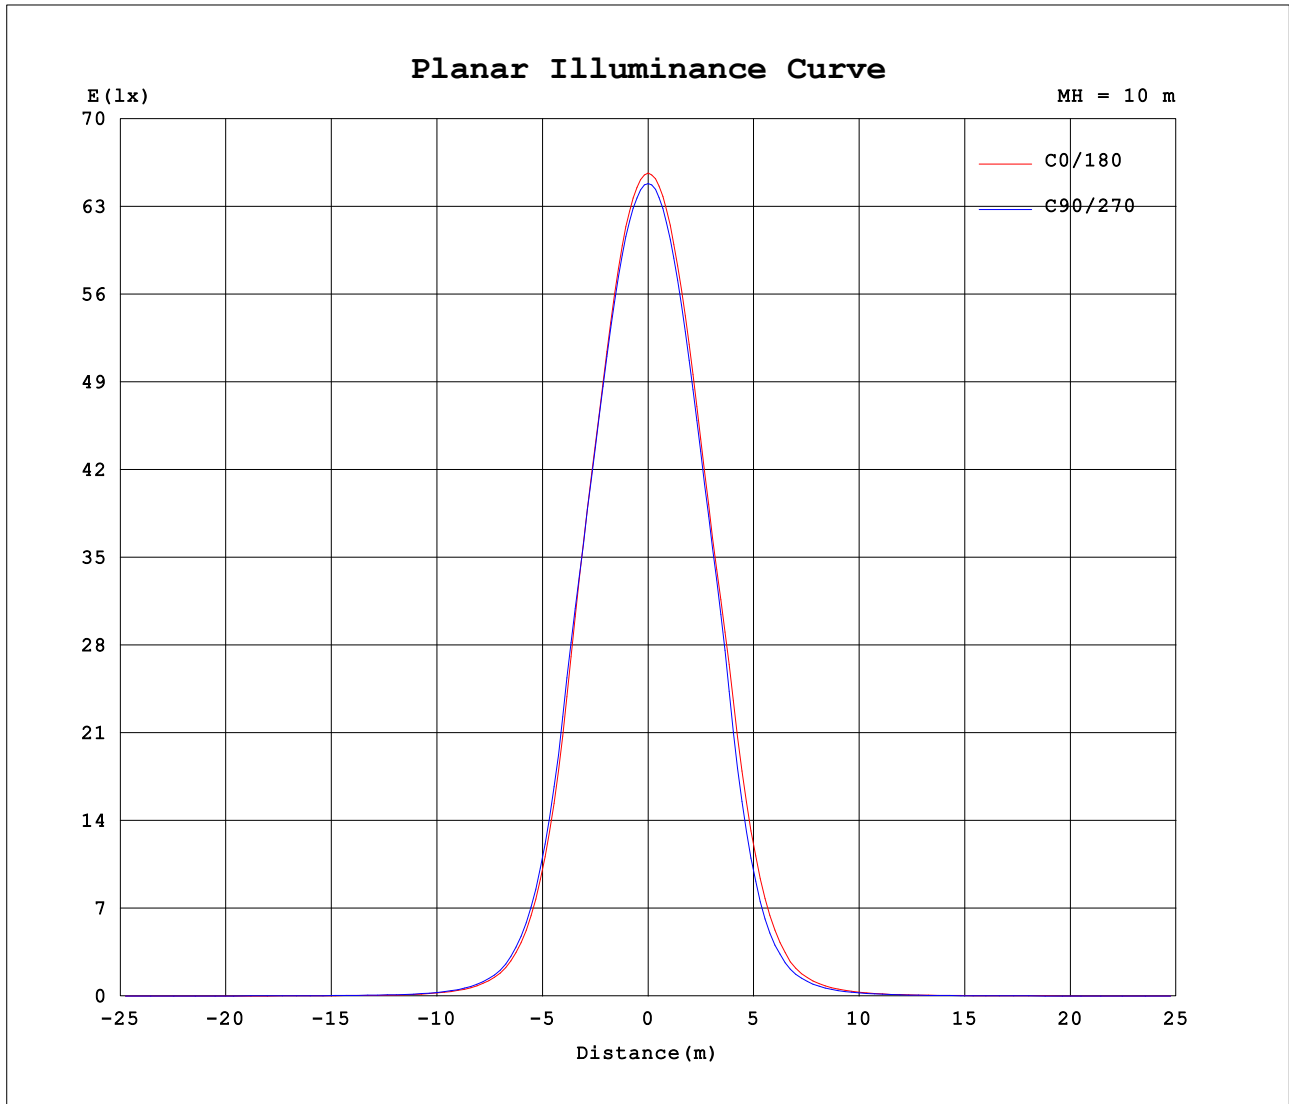

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.40V I:0.1940A P:41.700W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3106.45x1 lm		
Name: NS77-40W	Type: LED	
MFR.: Lumega		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	6567	6539	6511	6484	6449	6485	6567	6547	6511	6484	6449	6469							
5	6336	6341	6309	6256	6214	6258	6347	6286	6240	6242	6231	6257							
10	5629	5678	5651	5581	5540	5592	5684	5588	5528	5548	5548	5572							
15	4618	4681	4662	4588	4526	4560	4645	4532	4484	4533	4516	4535							
20	3265	3412	3445	3398	3349	3402	3501	3348	3277	3325	3258	3223							
25	1768	1873	1916	1916	1918	1992	2080	1919	1791	1765	1766	1770							
30	808	876	903	902	908	951	993	890	802	776	790	806							
35	338	369	381	380	384	397	406	360	325	319	326	334							
40	151	166	173	174	172	178	184	161	146	147	148	150							
45	72.6	80.4	84.1	84.5	83.4	86.4	90.7	81.4	75.2	75.4	75.0	74.2							
50	38.4	42.1	44.1	44.8	44.5	46.2	49.0	46.0	43.2	42.3	41.7	40.6							
55	27.7	31.7	33.1	32.8	33.3	33.9	34.2	34.2	32.3	29.3	29.5	29.3							
60	22.7	25.6	26.7	26.7	27.0	27.4	27.7	27.9	26.1	23.4	23.6	23.7							
65	18.5	21.8	23.3	23.4	23.4	23.6	23.9	24.5	23.1	20.6	20.7	20.4							
70	3.40	4.25	4.69	4.90	5.22	7.14	9.74	8.80	7.82	7.62	7.40	6.13							
75	0.50	0.55	0.69	0.85	0.66	2.32	5.19	5.23	4.87	4.77	4.91	3.69							
80	0.40	0.45	0.47	0.48	0.19	2.05	5.37	5.69	5.47	5.42	5.66	4.23							
85	0.36	0.39	0.41	0.42	0.06	2.18	5.98	6.31	6.04	6.00	6.29	4.68							
90	0.55	0.55	0.55	0.55	0.14	2.43	6.54	6.90	6.62	6.59	6.93	5.21							
95	0.95	0.93	0.93	0.92	0.51	2.87	7.11	7.50	7.23	7.20	7.56	5.78							
100	1.46	1.45	1.44	1.44	1.05	3.46	7.75	8.15	7.86	7.82	8.20	6.40							
105	1.99	1.98	1.98	1.99	1.59	4.09	8.51	8.87	8.55	8.50	8.88	7.02							
110	2.49	2.48	2.49	2.49	2.10	4.63	9.11	9.44	9.07	9.01	9.37	7.52							
115	2.91	2.93	2.93	2.93	2.54	5.03	9.43	9.71	9.32	9.25	9.60	7.79							
120	3.22	3.25	3.26	3.25	2.87	5.24	9.44	9.67	9.29	9.23	9.56	7.85							
125	3.39	3.43	3.44	3.43	3.07	5.27	9.14	9.32	8.95	8.91	9.22	7.65							
130	3.43	3.48	3.50	3.49	3.17	5.11	8.54	8.66	8.30	8.27	8.55	7.18							
135	3.34	3.41	3.43	3.42	3.15	4.78	7.66	7.72	7.39	7.36	7.60	6.46							
140	3.17	3.25	3.27	3.27	3.06	4.35	6.60	6.62	6.33	6.27	6.46	5.59							
145	3.03	3.09	3.12	3.12	2.97	3.89	5.51	5.48	5.21	5.13	5.25	4.65							
150	2.96	3.00	3.04	3.05	2.95	3.51	4.49	4.43	4.22	4.13	4.18	3.85							
155	2.94	2.96	2.99	3.01	2.95	3.23	3.74	3.67	3.54	3.49	3.45	3.28							
160	2.76	2.79	2.84	2.89	2.84	2.96	3.20	3.14	3.06	3.02	2.96	2.87							
165	2.54	2.57	2.62	2.66	2.64	2.69	2.79	2.71	2.66	2.65	2.56	2.51							
170	2.32	2.37	2.39	2.38	2.41	2.45	2.49	2.44	2.36	2.30	2.28	2.29							
175	2.19	2.23	2.22	2.19	2.23	2.27	2.30	2.31	2.23	2.10	2.13	2.17							
180	2.21	2.27	2.25	2.19	2.21	2.23	2.25	2.26	2.20	2.12	2.15	2.20							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: