
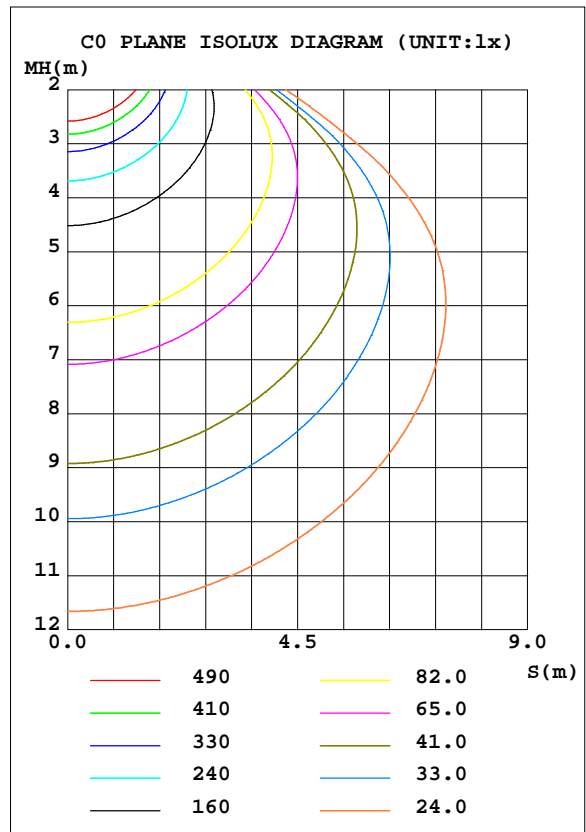


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.40V I:0.4620A P:100.20W PF:0.9830 Freq:50.00Hz		
Lamp Flux:12075x1 lm		
Name: NS90-100W	Type: LED	
MFR.: Lumega Group	DIM.: 315*245*65mm	
	SUR.: 135*195mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 120.51 lm/W			
MODEL		I _{max} (cd)	3591	S/MH(C0/180)	1.61
NOMINAL POWER(W)	100	LOR(%)	100.0	S/MH(C90/270)	1.66
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	12075	η UP, DN(C0-180)	1.2, 49.7
NOMINAL FLUX(lm)	12075	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3, 47.9
LAMPS INSIDE	1	η up(%)	2.5	CIBSE SHR NOM	1.75
TEST VOLTAGE(V)	220	η down(%)	97.5	CIBSE SHR MAX	1.75

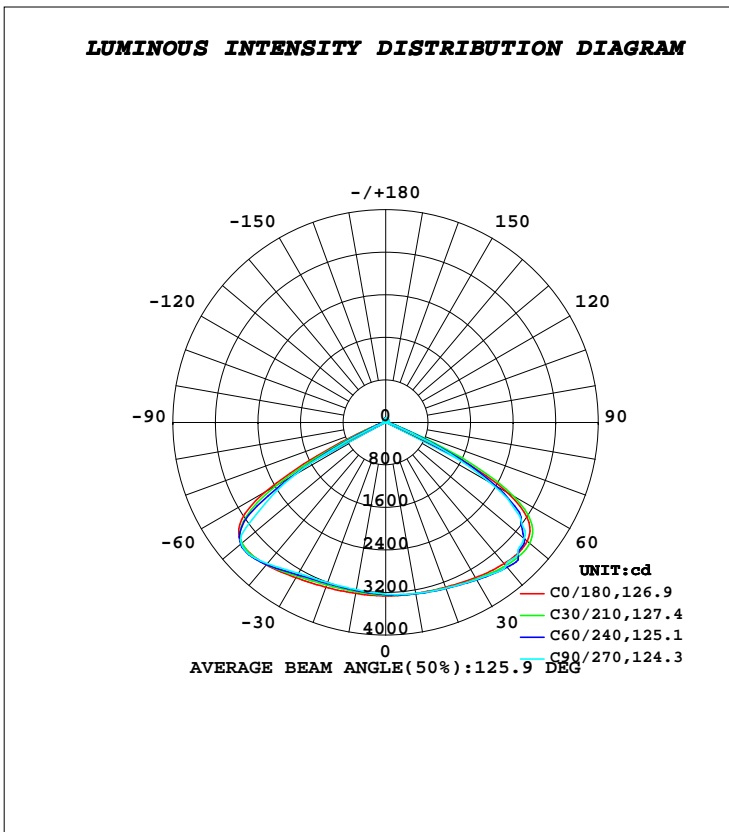

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	3266	3272	3267	3242	3264	3221	3194	3195	0- 10	308.9	308.9	2.56,2.56
20	3297	3317	3317	3288	3297	3238	3205	3208	10- 20	921.5	1230	10.2,10.2
30	3372	3410	3411	3375	3373	3324	3278	3280	20- 30	1530	2761	22.9,22.9
40	3466	3536	3525	3514	3496	3487	3463	3429	30- 40	2150	4910	40.7,40.7
50	3476	3473	3394	3446	3537	3546	3549	3494	40- 50	2723	7634	63.2,63.2
60	2645	2591	2265	2513	2638	2217	1978	2292	50- 60	2786	10420	86.3,86.3
70	361.1	410.7	304.9	346.3	341.7	263.2	163.1	290.3	60- 70	1167	11586	96,96
80	59.30	77.34	56.15	63.87	61.52	47.97	33.43	56.18	70- 80	156.9	11743	97.3,97.3
90	18.47	17.97	17.09	17.35	25.72	26.74	23.01	26.91	80- 90	34.36	11778	97.5,97.5
100	26.47	24.56	23.20	24.65	32.98	32.58	31.04	32.38	90-100	26.81	11804	97.8,97.8
110	37.56	35.52	34.26	35.53	44.20	42.84	42.12	42.25	100-110	35.67	11840	98.1,98.1
120	46.73	45.26	45.09	44.98	53.23	51.23	51.07	50.48	110-120	43.64	11884	98.4,98.4
130	52.63	52.27	51.69	51.20	59.32	57.40	57.22	56.83	120-130	46.36	11930	98.8,98.8
140	57.65	57.25	56.44	55.94	63.70	61.69	61.08	61.00	130-140	44.04	11974	99.2,99.2
150	65.92	65.08	64.34	63.92	70.12	68.07	67.08	66.97	140-150	39.20	12013	99.5,99.5
160	74.24	73.65	73.37	71.98	77.06	74.71	74.23	73.47	150-160	32.38	12046	99.8,99.8
170	80.23	79.07	78.48	77.19	81.61	79.22	78.81	77.95	160-170	21.64	12067	99.9,99.9
180	82.82	81.08	80.59	79.65	83.19	81.04	80.40	79.67	170-180	7.618	12075	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.40V I:0.4620A P:100.20W PF:0.9830 Freq:50.00Hz		
Lamp Flux:12075x1 lm		
Name: NS90-100W	Type: LED	
MFR.: Lumega Group	DIM.: 315*245*65mm	
	SUR.: 135*195mm	

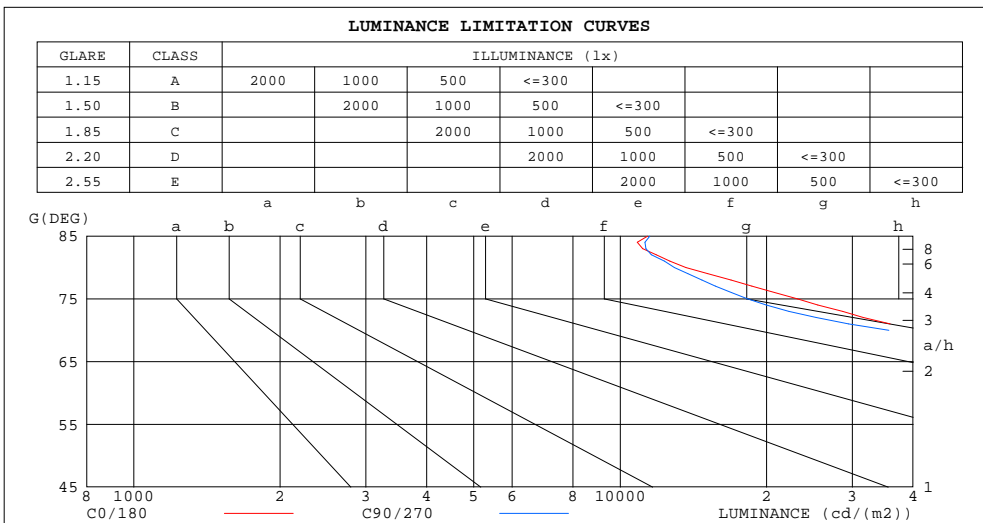


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.40V I:0.4620A P:100.20W PF:0.9830 Freq:50.00Hz		
Lamp Flux:12075x1 lm		
Name: NS90-100W	Type: LED	
MFR.: Lumega Group	DIM.: 315*245*65mm	
	SUR.: 135*195mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.05	1.02	.98	1.03	.99	.96	.98	.95	.93	.94	.92	.90	.90	.88	.87	.84
2.0	.92	.86	.81	.90	.84	.80	.86	.82	.77	.83	.79	.75	.79	.76	.73	.71
3.0	.81	.73	.67	.79	.72	.66	.76	.70	.65	.73	.68	.63	.70	.66	.62	.60
4.0	.71	.63	.56	.70	.62	.56	.67	.60	.55	.64	.59	.54	.62	.57	.53	.51
5.0	.63	.54	.48	.62	.54	.47	.60	.52	.47	.57	.51	.46	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.40	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.30	.41	.35	.30	.28
9.0	.42	.33	.28	.41	.33	.28	.40	.32	.27	.38	.32	.27	.37	.31	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.36	.29	.24	.35	.29	.24	.34	.28	.24	.22

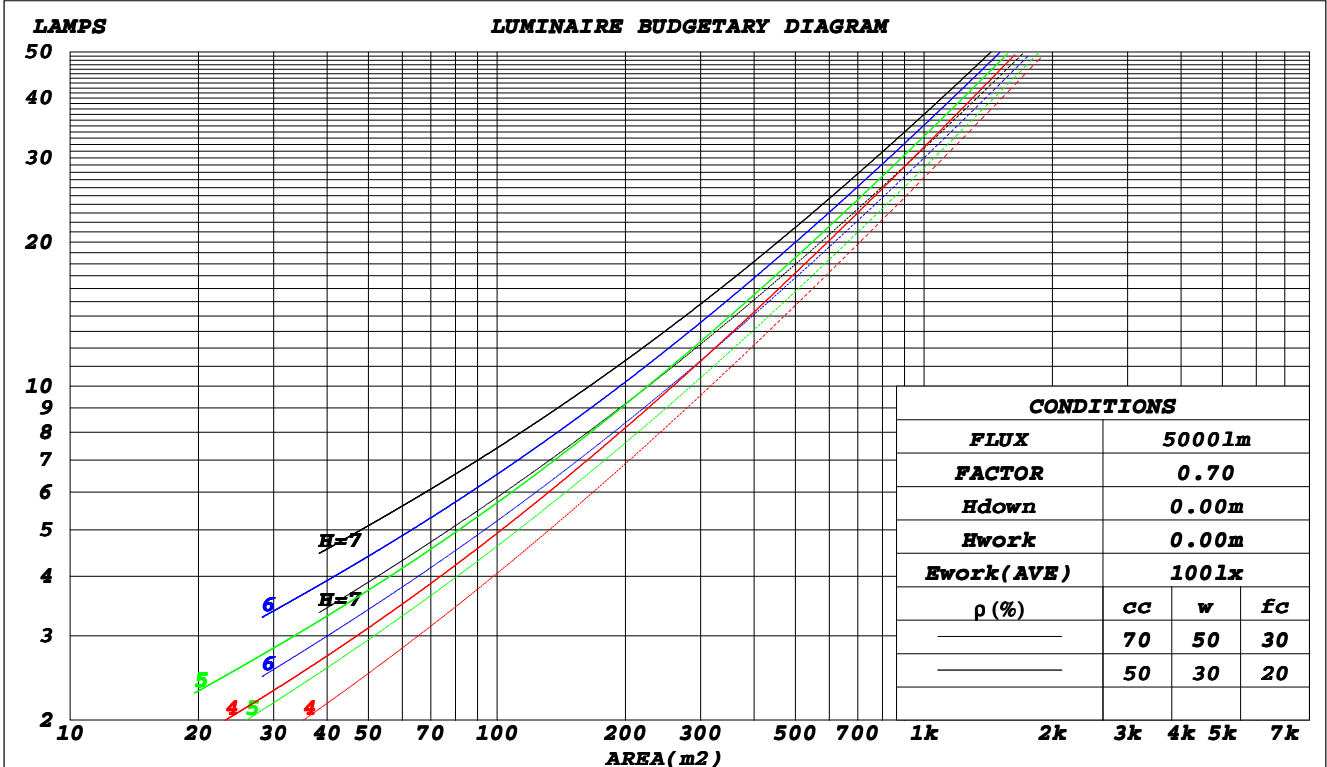

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.40V I:0.4620A P:100.20W PF:0.9830 Freq:50.00Hz		
Lamp Flux:12075x1 lm		
Name: NS90-100W	Type: LED	
MFR.: Lumega Group	DIM.: 315*245*65mm	
	SUR.: 135*195mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.271	.154	.049	.264	.150	.048	.249	.143	.046	.236	.136	.044	.224	.130	.042	
2.0	.268	.147	.045	.261	.144	.044	.248	.138	.043	.236	.133	.042	.225	.128	.040	
3.0	.256	.136	.041	.250	.134	.040	.238	.129	.039	.228	.125	.038	.218	.121	.037	
4.0	.241	.125	.037	.236	.123	.036	.225	.120	.036	.216	.116	.035	.207	.113	.034	
5.0	.226	.115	.033	.221	.114	.033	.212	.110	.033	.204	.107	.032	.196	.105	.031	
6.0	.212	.106	.030	.208	.105	.030	.199	.102	.030	.192	.100	.029	.184	.097	.029	
7.0	.199	.098	.028	.195	.097	.028	.187	.095	.027	.180	.092	.027	.174	.090	.027	
8.0	.186	.091	.026	.183	.090	.025	.176	.088	.025	.170	.086	.025	.164	.084	.025	
9.0	.175	.085	.024	.172	.084	.024	.166	.082	.023	.160	.080	.023	.155	.079	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.151	.075	.021	.147	.074	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.197	.175	.156	.168	.151	.135	.115	.104	.093	.066	.060	.054	.021	.019	.017	
2.0	.188	.151	.120	.161	.130	.104	.110	.090	.072	.064	.052	.042	.020	.017	.014	
3.0	.181	.133	.095	.155	.115	.083	.106	.080	.058	.061	.047	.034	.020	.015	.011	
4.0	.174	.120	.079	.149	.104	.068	.103	.072	.048	.059	.042	.029	.019	.014	.009	
5.0	.167	.110	.067	.144	.095	.058	.099	.066	.041	.057	.039	.024	.018	.013	.008	
6.0	.161	.101	.059	.138	.088	.051	.095	.062	.036	.055	.036	.022	.018	.012	.007	
7.0	.155	.095	.053	.133	.082	.046	.092	.058	.033	.053	.034	.019	.017	.011	.006	
8.0	.149	.089	.048	.128	.077	.042	.089	.054	.030	.052	.032	.018	.017	.010	.006	
9.0	.143	.084	.045	.123	.073	.039	.085	.051	.028	.050	.030	.016	.016	.010	.005	
10.0	.137	.080	.042	.118	.069	.036	.082	.049	.026	.048	.029	.015	.016	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.40V I:0.4620A P:100.20W PF:0.9830 Freq:50.00Hz		
Lamp Flux:12075x1 lm		
Name: NS90-100W	Type: LED	
MFR.: Lumega Group	DIM.: 315*245*65mm	
	SUR.: 135*195mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	32.5	34.0	32.8	34.3	34.5	31.9	33.4	32.2	33.7	33.9
3H	32.7	34.0	33.0	34.3	34.6	32.0	33.4	32.4	33.7	34.0
4H	32.6	33.9	32.9	34.2	34.5	32.0	33.2	32.3	33.5	33.8
6H	32.5	33.7	32.9	34.0	34.3	31.9	33.0	32.2	33.4	33.7
8H	32.4	33.6	32.8	33.9	34.3	31.8	32.9	32.2	33.3	33.6
12H	32.4	33.5	32.8	33.8	34.2	31.8	32.8	32.1	33.2	33.5
4H 2H	32.8	34.1	33.2	34.4	34.7	32.3	33.6	32.7	33.9	34.2
3H	33.0	34.1	33.4	34.4	34.8	32.4	33.5	32.8	33.9	34.2
4H	32.9	33.9	33.3	34.3	34.7	32.4	33.4	32.8	33.7	34.1
6H	32.8	33.7	33.3	34.1	34.5	32.3	33.1	32.7	33.5	34.0
8H	32.8	33.6	33.2	34.0	34.4	32.2	33.0	32.7	33.4	33.9
12H	32.8	33.5	33.2	33.9	34.4	32.2	32.9	32.7	33.4	33.8
8H 4H	32.8	33.6	33.3	34.0	34.4	32.3	33.1	32.7	33.5	33.9
6H	32.7	33.4	33.2	33.8	34.3	32.2	32.8	32.7	33.3	33.8
8H	32.7	33.3	33.2	33.7	34.2	32.2	32.7	32.7	33.2	33.7
12H	32.7	33.2	33.2	33.7	34.2	32.1	32.6	32.6	33.1	33.6
12H 4H	32.8	33.5	33.2	33.9	34.4	32.2	32.9	32.7	33.4	33.8
6H	32.7	33.3	33.2	33.7	34.2	32.2	32.7	32.6	33.2	33.7
8H	32.7	33.2	33.2	33.6	34.2	32.1	32.6	32.6	33.1	33.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.3					+ 0.3 / - 0.4				
1.5H	+ 1.5 / - 2.0					+ 1.2 / - 1.7				
2.0H	+ 0.8 / - 1.9					+ 0.7 / - 1.2				

CIE Pub.117, 12075 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 8.7)
 Area: 0.025 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.40V I:0.4620A P:100.20W PF:0.9830 Freq:50.00Hz Lamp Flux:12075x1 lm		
Name: NS90-100W	Type: LED	
MFR.: Lumega Group	DIM.: 315*245*65mm	
	SUR.: 135*195mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	53	41	34	53	41	34	51	40	33	27
0.80	65	53	45	64	53	45	62	52	45	37
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	73	66	82	72	66	79	71	65	57
1.50	89	79	72	87	78	72	84	76	71	63
2.00	96	88	82	94	87	81	90	84	79	71
2.50	100	92	87	98	91	86	93	88	84	75
3.00	103	97	92	101	95	90	96	92	88	79
4.00	107	101	97	104	99	96	100	96	93	83
5.00	109	104	100	106	102	99	101	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.40V I:0.4620A P:100.20W PF:0.9830 Freq:50.00Hz Lamp Flux:12075x1 lm		
Name: NS90-100W	Type: LED	
MFR.: Lumega Group	DIM.: 315*245*65mm	
	SUR.: 135*195mm	

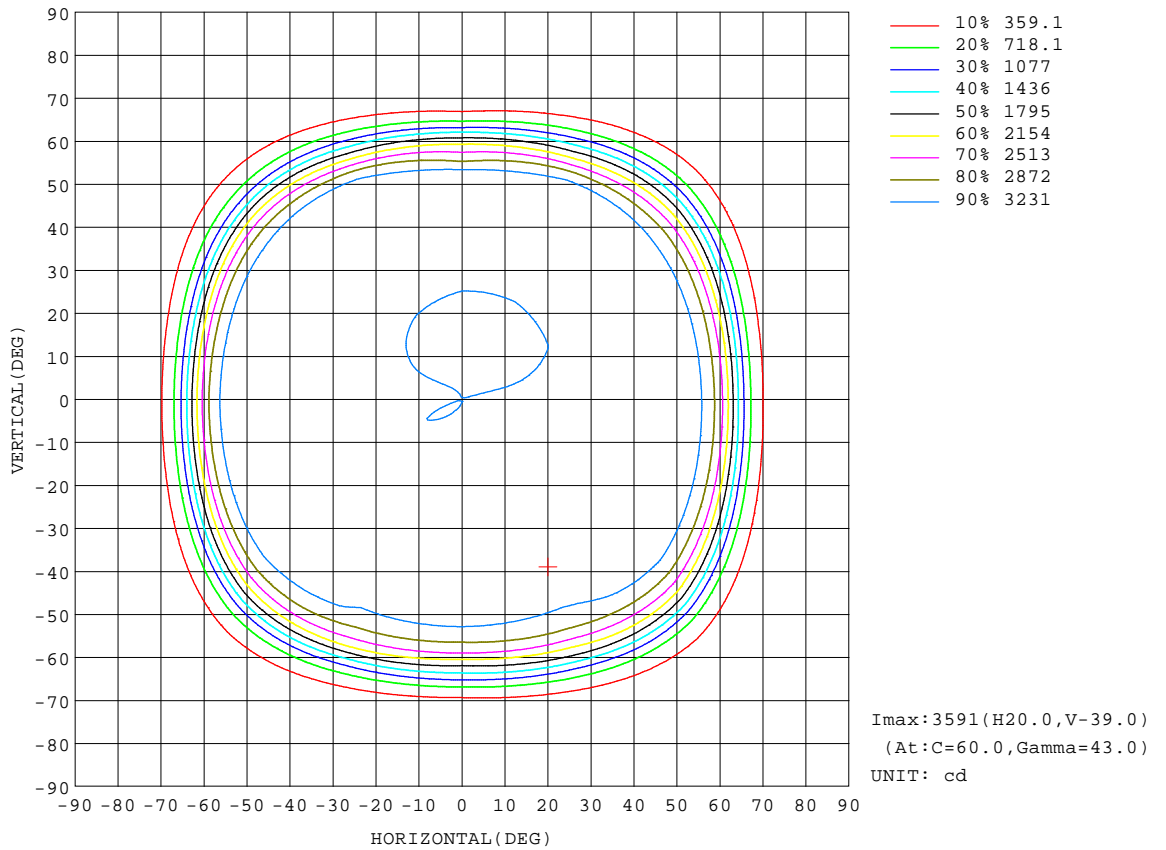


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:220.40V I:0.4620A P:100.20W PF:0.9830 Freq:50.00Hz Lamp Flux:12075x1 lm		
Name: NS90-100W	Type: LED	
MFR.: Lumega Group	DIM.: 315*245*65mm	
	SUR.: 135*195mm	

Flux out:11004 lm

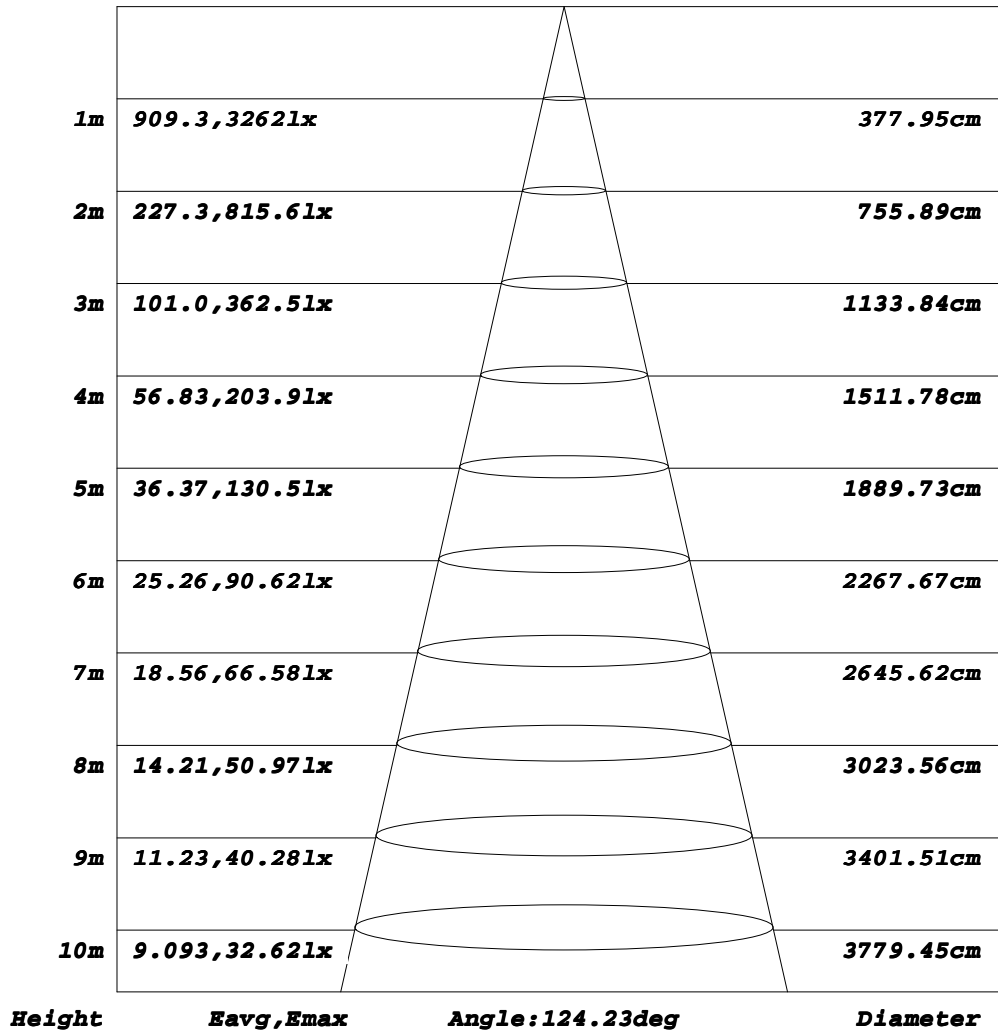


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:220.40V I:0.4620A P:100.20W PF:0.9830 Freq:50.00Hz		
Lamp Flux:12075x1 lm		
Name: NS90-100W	Type: LED	
MFR.: Lumega Group	DIM.: 315*245*65mm	
	SUR.: 135*195mm	

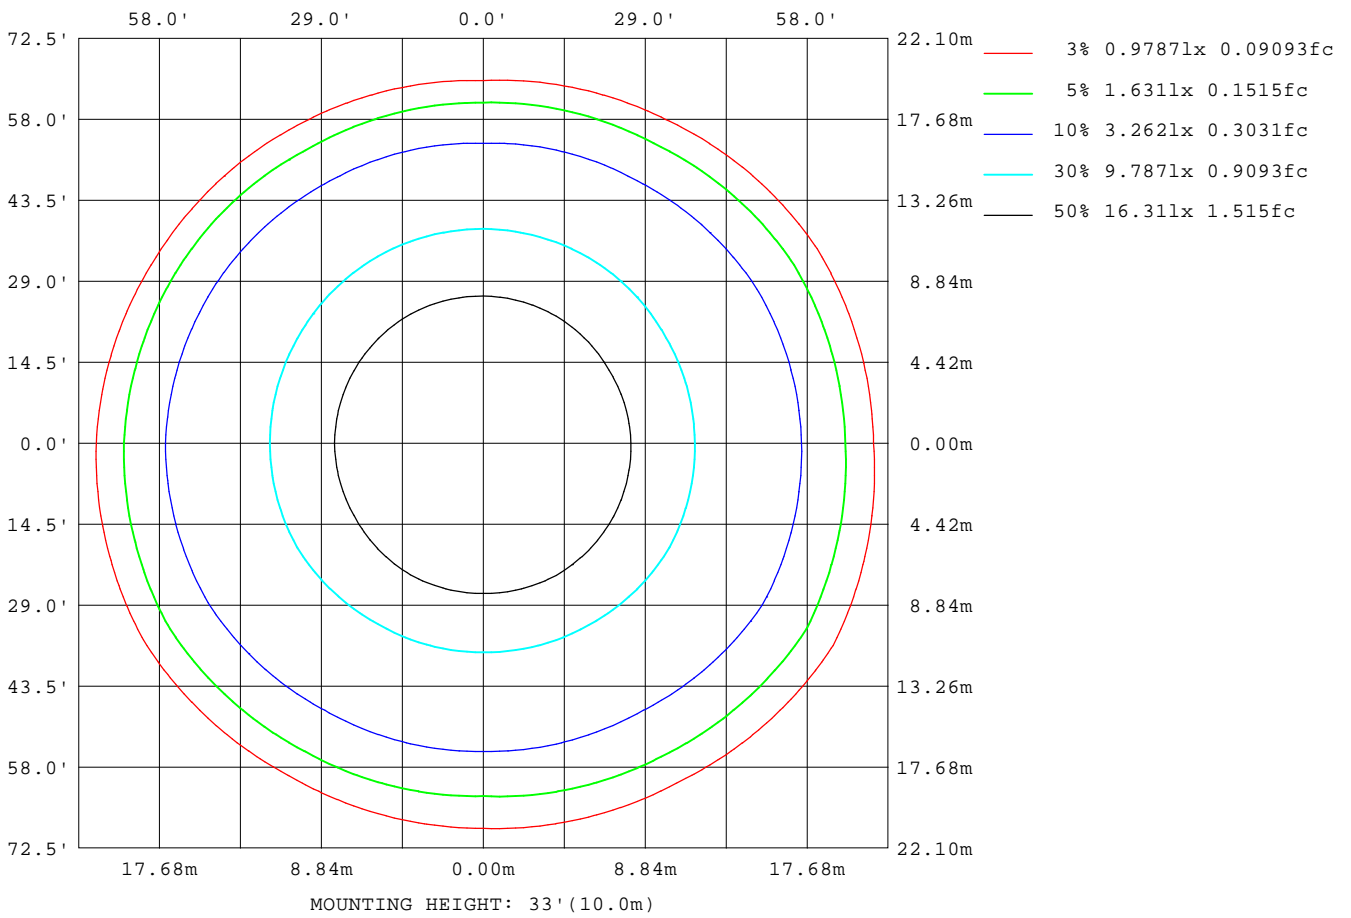

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

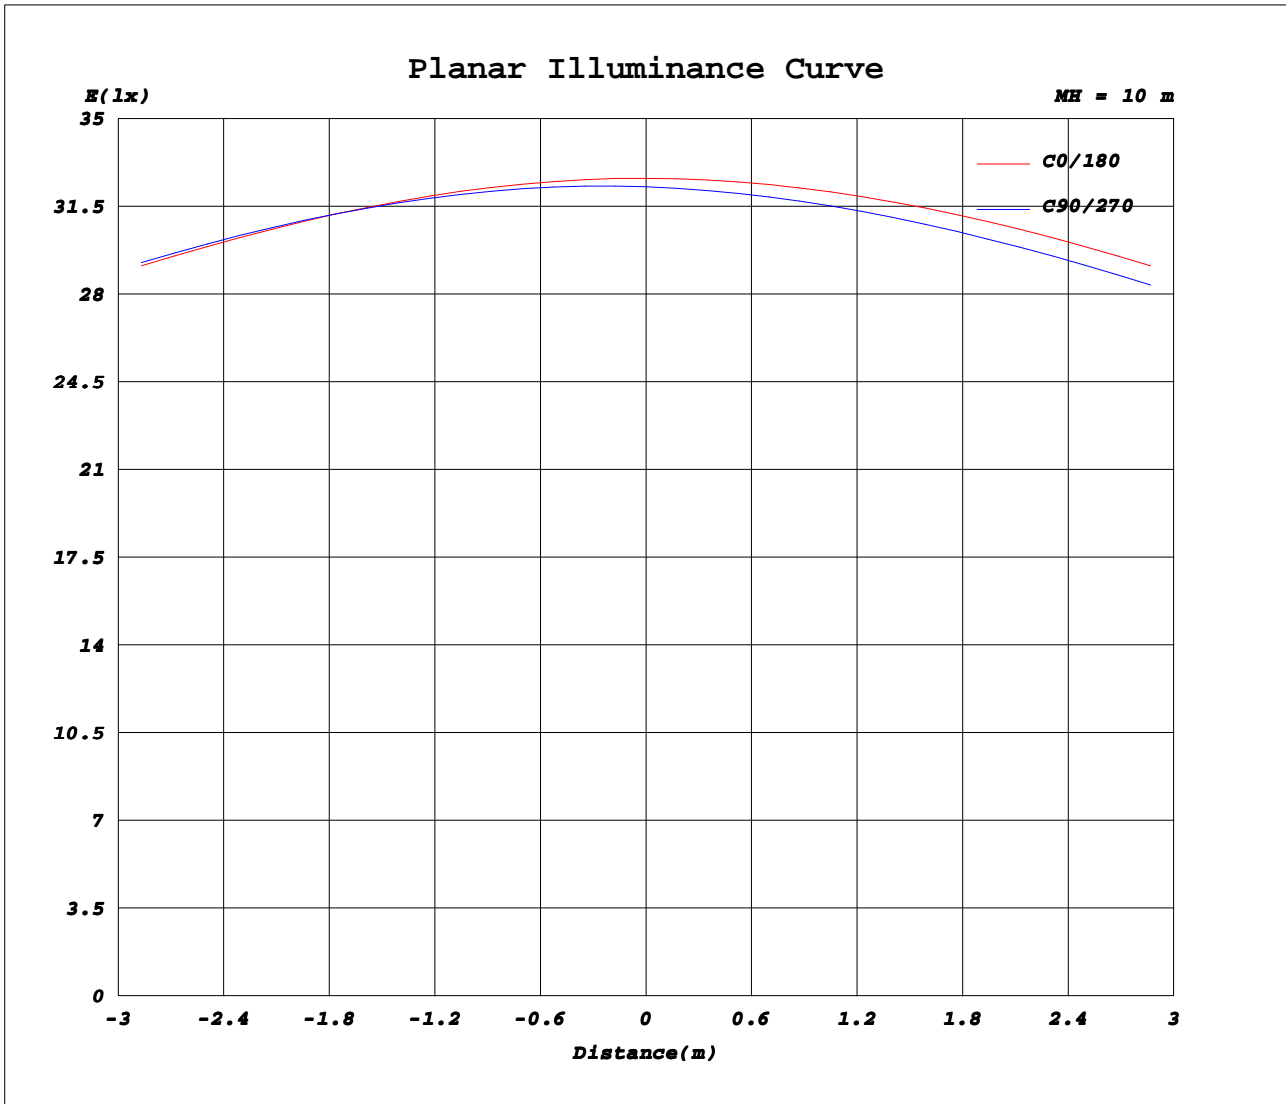

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.40V I:0.4620A P:100.20W PF:0.9830 Freq:50.00Hz		
Lamp Flux:12075x1 lm		
Name: NS90-100W	Type: LED	
MFR.: Lumega Group	DIM.: 315*245*65mm	
	SUR.: 135*195mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	3262	3248	3239	3228	3222	3214	3262	3248	3239	3228	3222	3214							
5	3263	3259	3256	3248	3236	3222	3261	3237	3221	3207	3204	3204							
10	3266	3270	3274	3267	3252	3232	3264	3233	3209	3194	3193	3198							
15	3276	3286	3294	3289	3272	3249	3276	3237	3208	3193	3190	3201							
20	3297	3313	3321	3317	3300	3275	3297	3254	3221	3205	3201	3214							
25	3329	3351	3362	3357	3338	3309	3327	3287	3253	3231	3227	3242							
30	3372	3401	3419	3411	3393	3357	3373	3340	3309	3278	3273	3286							
35	3421	3457	3487	3479	3463	3416	3431	3410	3390	3358	3347	3346							
40	3466	3516	3556	3525	3544	3484	3496	3485	3488	3463	3444	3413							
45	3497	3555	3526	3516	3487	3543	3540	3545	3571	3560	3530	3467							
50	3476	3535	3411	3394	3360	3532	3537	3530	3563	3549	3526	3462							
55	3290	3357	3107	3078	3107	3333	3352	3278	3250	2918	3229	3239							
60	2645	2783	2399	2265	2386	2640	2638	2379	2055	1978	2095	2489							
65	1232	1580	1255	1135	1122	1294	1159	935	776	635	850	1142							
70	361	447	375	305	324	368	342	291	236	163	251	329							
75	150	184	148	118	133	152	144	124	106	69.5	118	144							
80	59.3	84.4	70.3	56.2	61.9	65.8	61.5	52.6	43.3	33.4	48.6	63.8							
85	24.8	31.4	28.6	25.1	25.4	23.1	29.6	27.7	27.2	22.9	28.2	30.2							
90	18.5	18.1	17.8	17.1	17.3	17.4	25.7	26.7	26.7	23.0	26.9	26.9							
95	21.7	20.4	19.7	18.7	19.7	20.5	28.4	29.7	28.3	26.2	28.8	29.6							
100	26.5	25.0	24.1	23.2	24.2	25.1	33.0	33.7	31.4	31.0	31.1	33.6							
105	32.0	30.2	29.4	28.5	29.5	30.5	38.5	38.3	36.9	36.6	36.5	37.7							
110	37.6	36.0	35.0	34.3	35.0	36.0	44.2	43.4	42.3	42.1	41.9	42.6							
115	42.7	41.3	40.5	40.1	40.4	41.1	49.3	47.8	46.7	47.0	46.4	46.8							
120	46.7	45.4	45.1	45.1	45.0	45.0	53.2	51.7	50.8	51.1	50.4	50.5							
125	49.9	49.1	48.9	48.9	48.5	48.4	56.5	55.1	54.2	54.6	54.1	53.9							
130	52.6	52.3	52.2	51.7	51.4	51.0	59.3	57.8	57.0	57.2	56.9	56.7							
135	55.0	54.8	54.9	54.0	53.7	53.1	61.5	59.8	59.1	59.2	59.0	58.9							
140	57.7	57.3	57.2	56.4	56.2	55.7	63.7	62.0	61.4	61.1	60.9	61.1							
145	61.6	61.1	60.6	60.0	59.7	59.5	66.6	64.9	64.4	63.7	63.5	63.9							
150	65.9	65.5	64.7	64.3	64.1	63.7	70.1	68.3	67.8	67.1	66.7	67.3							
155	70.3	69.9	69.2	69.0	68.6	67.9	73.7	71.8	71.4	70.7	70.1	70.6							
160	74.2	74.0	73.3	73.4	72.4	71.5	77.1	75.0	74.5	74.2	73.3	73.7							
165	77.5	77.4	76.4	76.5	75.4	74.5	79.7	77.6	77.0	76.9	75.9	76.1							
170	80.2	79.6	78.5	78.5	77.5	76.9	81.6	79.5	78.9	78.8	77.9	78.0							
175	82.3	81.4	79.9	80.0	79.2	79.0	82.8	80.8	80.0	79.8	79.0	79.0							
180	82.8	81.8	80.4	80.6	79.6	79.7	83.2	81.5	80.6	80.4	79.7	79.6							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: