
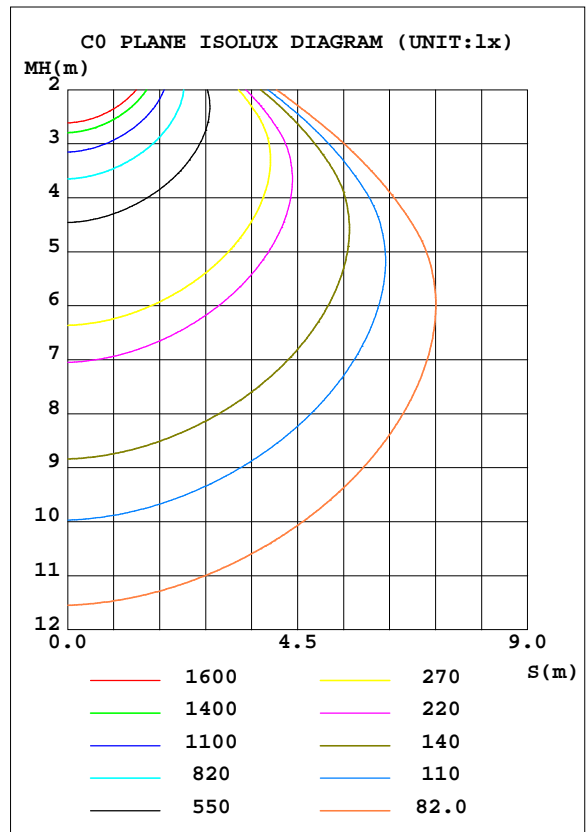


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.30V I:1.4020A P:301.20W PF:0.9750 Freq:50.00Hz		
Lamp Flux:41346.3x1 lm		
Name: NS90-300W	Type: LED	
MFR.: Lumega Group	DIM.: 420*330*65mm	
	SUR.: 330*340mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 137.27 lm/W			
MODEL		I _{max} (cd)	12488	S/MH(C0/180)	1.59
NOMINAL POWER(W)	300	LOR(%)	100.0	S/MH(C90/270)	1.62
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	41346	η UP, DN(C0-180)	1.1, 48.6
NOMINAL FLUX(lm)	41346.3	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.2, 49.1
LAMPS INSIDE	1	η up(%)	2.3	CIBSE SHR NOM	1.75
TEST VOLTAGE(V)	220	η down(%)	97.7	CIBSE SHR MAX	1.75

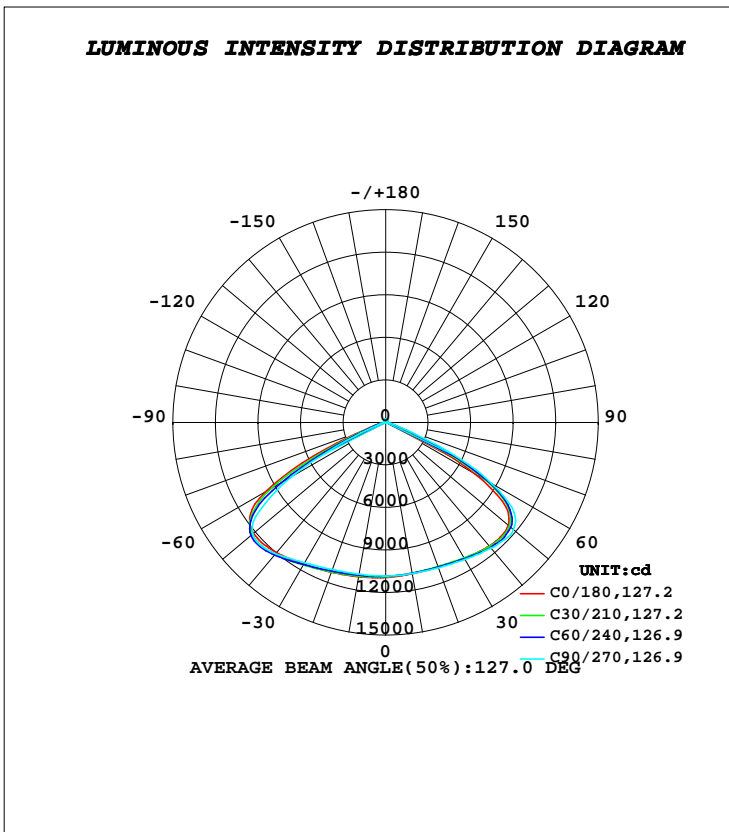

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1084	1080	1082	1086	1105	1098	1087	1075	0- 10	1036	1036	2.51,2.51
20	1086	1083	1090	1100	1124	1119	1104	1083	10- 20	3093	4129	9.99,9.99
30	1107	1107	1116	1129	1156	1159	1143	1114	20- 30	5147	9277	22.4,22.4
40	1137	1146	1157	1176	1198	1217	1208	1165	30- 40	7239	16516	39.9,39.9
50	1128	1145	1175	1195	1217	1235	1223	1171	40- 50	9215	25730	62.2,62.2
60	727.9	822.8	866.2	945.1	978.4	890.6	763.4	725.2	50- 60	9591	35322	85.4,85.4
70	92.99	117.5	143.3	169.0	178.7	133.0	88.29	94.58	60- 70	4303	39625	95.8,95.8
80	16.40	23.69	24.49	31.07	31.18	28.16	16.95	20.35	70- 80	633.7	40258	97.4,97.4
90	6.401	6.107	5.975	5.909	8.387	8.357	8.296	8.689	80- 90	134.3	40393	97.7,97.7
100	9.436	8.918	8.306	8.088	10.20	10.51	10.93	11.26	90-100	90.26	40483	97.9,97.9
110	13.04	12.61	12.04	11.67	13.72	13.84	14.14	14.46	100-110	121.3	40604	98.2,98.2
120	15.10	15.00	14.86	14.17	16.18	15.91	16.16	16.33	110-120	142.7	40747	98.6,98.6
130	16.68	16.78	16.43	15.67	17.78	17.61	17.69	17.88	120-130	145.8	40893	98.9,98.9
140	18.34	18.40	17.86	17.04	19.24	18.96	19.02	19.19	130-140	137.1	41030	99.2,99.2
150	21.05	21.07	20.43	19.61	21.35	21.07	21.11	21.33	140-150	122.8	41153	99.5,99.5
160	23.71	23.49	22.86	22.25	23.77	23.33	23.37	23.47	150-160	101.9	41255	99.8,99.8
170	25.19	24.69	24.30	23.95	25.55	24.79	24.78	24.69	160-170	67.94	41322	99.9,99.9
180	25.70	25.20	25.01	24.80	25.78	25.19	24.96	24.80	170-180	23.77	41346	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT: lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.30V I:1.4020A P:301.20W PF:0.9750 Freq:50.00Hz		
Lamp Flux:41346.3x1 lm		
Name: NS90-300W	Type: LED	
MFR.: Lumega Group	DIM.: 420*330*65mm	
	SUR.: 330*340mm	

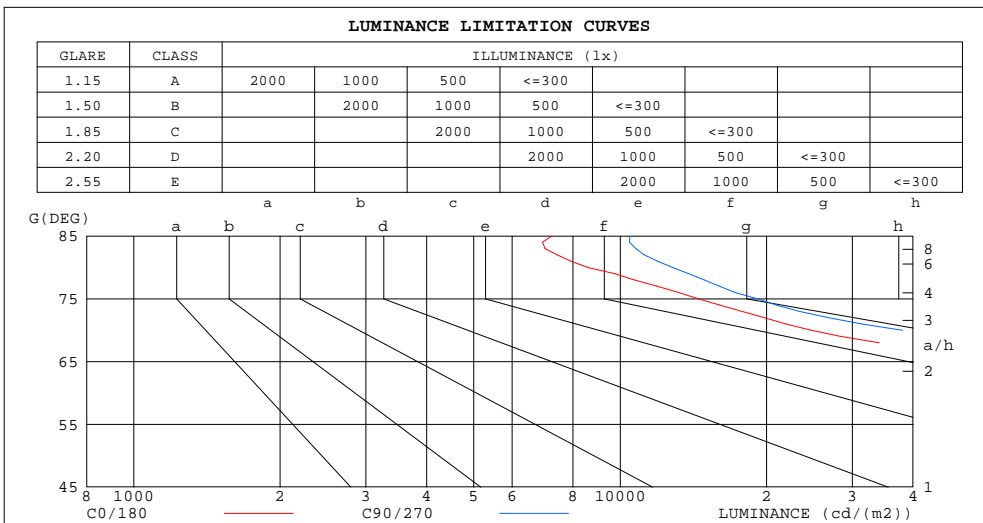

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	7222	10472
80	8586	12822
75	14516	19200
70	24716	38084
65	64472	105324
60	132354	157494
55	163999	175388
50	159581	166234
45	147198	151156


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.30V I:1.4020A P:301.20W PF:0.9750 Freq:50.00Hz		
Lamp Flux:41346.3xl lm		
Name: NS90-300W	Type: LED	
MFR.: Lumega Group	DIM.: 420*330*65mm	
	SUR.: 330*340mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.05	1.01	.98	1.03	.99	.96	.98	.95	.93	.94	.92	.89	.90	.88	.86	.84
2.0	.92	.86	.80	.90	.84	.79	.86	.81	.77	.83	.78	.75	.79	.76	.73	.71
3.0	.81	.73	.66	.79	.72	.66	.76	.69	.64	.73	.67	.63	.70	.65	.62	.59
4.0	.71	.62	.56	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.37
7.0	.50	.41	.35	.49	.41	.35	.48	.40	.35	.46	.39	.34	.44	.38	.34	.32
8.0	.45	.37	.31	.45	.36	.31	.43	.36	.30	.42	.35	.30	.40	.34	.30	.28
9.0	.41	.33	.27	.41	.33	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.25
10.0	.38	.30	.24	.37	.30	.24	.36	.29	.24	.35	.28	.24	.34	.28	.24	.22

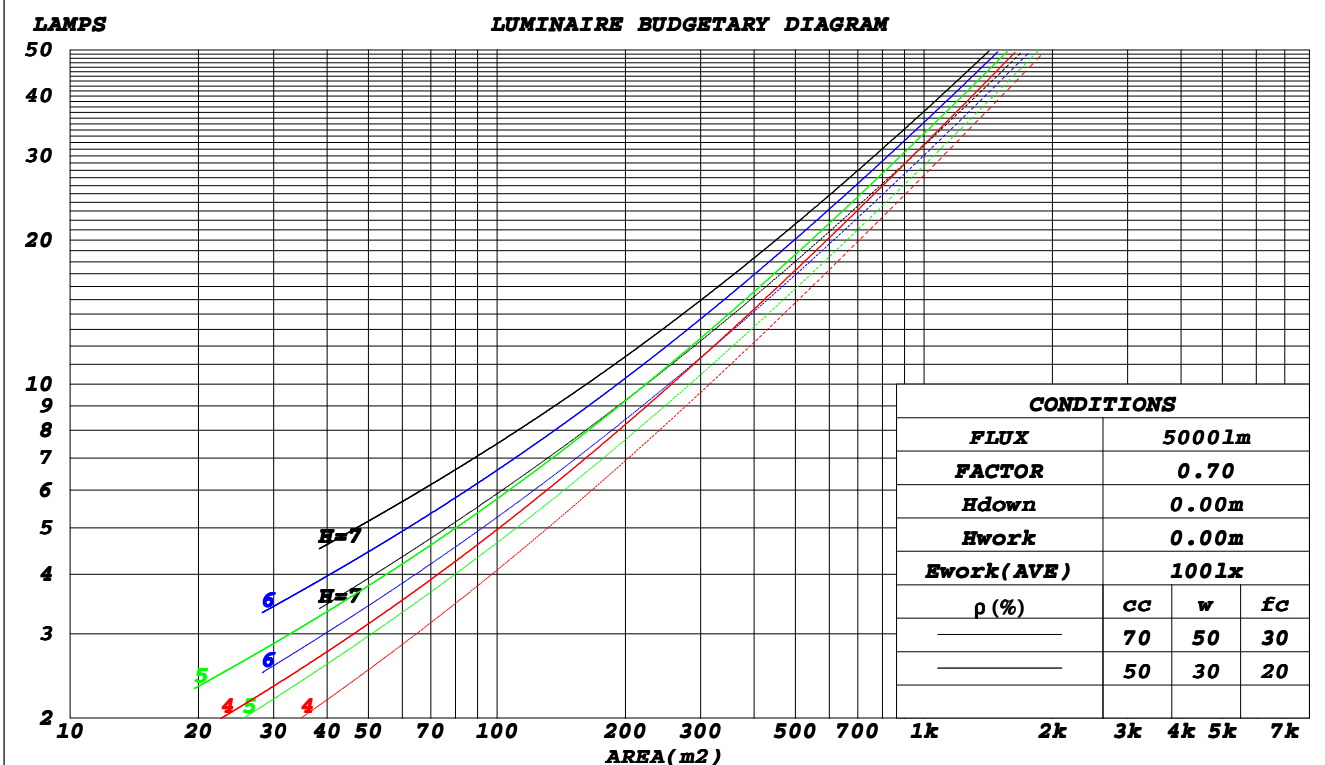

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.30V I:1.4020A P:301.20W PF:0.9750 Freq:50.00Hz		
Lamp Flux:41346.3x1 lm		
Name: NS90-300W	Type: LED	
MFR.: Lumega Group	DIM.: 420*330*65mm	
	SUR.: 330*340mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.275	.156	.050	.267	.152	.048	.253	.145	.046	.240	.138	.044	.227	.132	.042	
2.0	.271	.148	.046	.264	.145	.045	.251	.140	.043	.240	.134	.042	.229	.129	.041	
3.0	.258	.137	.041	.252	.135	.041	.241	.131	.040	.230	.126	.039	.221	.122	.038	
4.0	.243	.126	.037	.238	.124	.037	.228	.121	.036	.218	.117	.035	.209	.114	.035	
5.0	.228	.116	.034	.223	.115	.033	.214	.111	.033	.206	.108	.032	.198	.106	.032	
6.0	.213	.107	.031	.209	.106	.030	.201	.103	.030	.193	.100	.030	.186	.098	.029	
7.0	.200	.099	.028	.196	.098	.028	.189	.095	.027	.182	.093	.027	.175	.091	.027	
8.0	.187	.092	.026	.184	.091	.026	.177	.089	.025	.171	.087	.025	.165	.085	.025	
9.0	.176	.085	.024	.173	.084	.024	.167	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.166	.079	.022	.163	.079	.022	.157	.077	.022	.152	.076	.021	.147	.074	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.178	.178	.178	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.196	.174	.155	.167	.149	.133	.114	.103	.092	.066	.060	.054	.021	.019	.017	
2.0	.187	.150	.118	.160	.129	.102	.110	.089	.071	.063	.052	.042	.020	.017	.014	
3.0	.180	.132	.094	.154	.114	.081	.106	.079	.057	.061	.046	.034	.020	.015	.011	
4.0	.173	.119	.077	.149	.103	.067	.102	.072	.047	.059	.042	.028	.019	.014	.009	
5.0	.167	.109	.066	.143	.094	.057	.099	.066	.040	.057	.039	.024	.018	.013	.008	
6.0	.160	.100	.057	.138	.087	.050	.095	.061	.035	.055	.036	.021	.018	.012	.007	
7.0	.154	.094	.051	.132	.081	.045	.091	.057	.032	.053	.033	.019	.017	.011	.006	
8.0	.148	.088	.047	.127	.076	.041	.088	.054	.029	.051	.032	.017	.017	.010	.006	
9.0	.142	.083	.043	.122	.072	.038	.085	.051	.027	.049	.030	.016	.016	.010	.005	
10.0	.136	.079	.040	.118	.068	.035	.082	.048	.025	.048	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.30V I:1.4020A P:301.20W PF:0.9750 Freq:50.00Hz		
Lamp Flux:41346.3x1 lm		
Name: NS90-300W	Type: LED	
MFR.: Lumega Group	DIM.: 420*330*65mm	
	SUR.: 330*340mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	30.8	32.3	31.1	32.5	32.8	31.2	32.7	31.5	33.0	33.2
3H	30.8	32.2	31.1	32.4	32.7	31.4	32.8	31.8	33.1	33.4
4H	30.7	32.0	31.1	32.3	32.6	31.4	32.6	31.7	32.9	33.2
6H	30.6	31.8	31.0	32.1	32.5	31.3	32.5	31.6	32.8	33.1
8H	30.6	31.7	30.9	32.0	32.4	31.2	32.4	31.6	32.7	33.0
12H	30.5	31.6	30.9	32.0	32.3	31.2	32.3	31.5	32.6	33.0
4H 2H	31.1	32.4	31.4	32.7	33.0	31.5	32.8	31.8	33.1	33.4
3H	31.1	32.2	31.5	32.6	32.9	31.7	32.8	32.0	33.1	33.5
4H	31.0	32.0	31.4	32.4	32.8	31.6	32.6	32.0	33.0	33.3
6H	31.0	31.8	31.4	32.2	32.6	31.5	32.4	32.0	32.8	33.2
8H	30.9	31.7	31.4	32.1	32.6	31.5	32.3	31.9	32.7	33.1
12H	30.9	31.6	31.3	32.0	32.5	31.4	32.2	31.9	32.6	33.1
8H 4H	30.9	31.7	31.4	32.1	32.6	31.5	32.3	31.9	32.7	33.1
6H	30.9	31.5	31.3	32.0	32.4	31.4	32.1	31.9	32.5	33.0
8H	30.8	31.4	31.3	31.9	32.4	31.4	32.0	31.9	32.4	32.9
12H	30.8	31.3	31.3	31.8	32.3	31.4	31.9	31.9	32.3	32.9
12H 4H	30.9	31.6	31.3	32.0	32.5	31.4	32.2	31.9	32.6	33.1
6H	30.8	31.4	31.3	31.9	32.4	31.4	32.0	31.9	32.4	32.9
8H	30.8	31.3	31.3	31.8	32.3	31.4	31.8	31.9	32.3	32.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 1.5 / - 2.1					+ 1.3 / - 1.5				
2.0H	+ 0.8 / - 1.7					+ 0.9 / - 1.5				

CIE Pub.117, 41346 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 12.9)
 Area: 0.11 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.30V I:1.4020A P:301.20W PF:0.9750 Freq:50.00Hz Lamp Flux:41346.3x1 lm		
Name: NS90-300W	Type: LED	
MFR.: Lumega Group	DIM.: 420*330*65mm	
	SUR.: 330*340mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	53	41	33	52	40	33	51	40	33	26
0.80	65	53	45	64	52	45	62	51	44	37
1.00	75	64	56	74	63	56	71	64	55	48
1.25	83	73	65	81	72	65	78	70	64	57
1.50	88	79	72	87	78	71	83	76	70	62
2.00	96	88	81	94	86	81	90	84	79	71
2.50	100	92	86	97	91	85	93	88	83	75
3.00	103	96	91	101	95	90	96	92	88	79
4.00	107	101	97	104	99	95	100	96	92	83
5.00	109	104	100	106	102	99	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.30V I:1.4020A P:301.20W PF:0.9750 Freq:50.00Hz		
Lamp Flux:41346.3x1 lm		
Name: NS90-300W	Type: LED	
MFR.: Lumega Group	DIM.: 420*330*65mm	
	SUR.: 330*340mm	

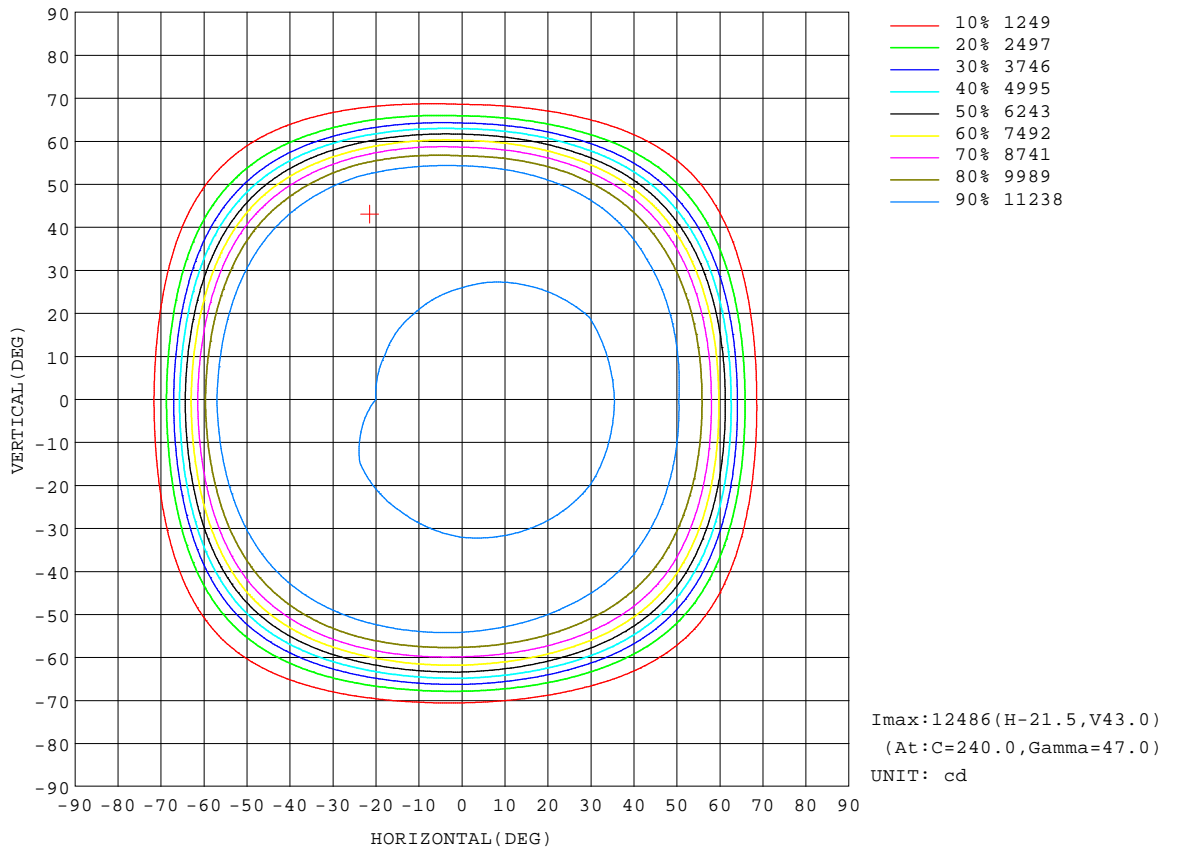


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:220.30V I:1.4020A P:301.20W PF:0.9750 Freq:50.00Hz		
Lamp Flux:41346.3x1 lm		
Name: NS90-300W	Type: LED	
MFR.: Lumega Group	DIM.: 420*330*65mm	
	SUR.: 330*340mm	

Flux out:37933 lm

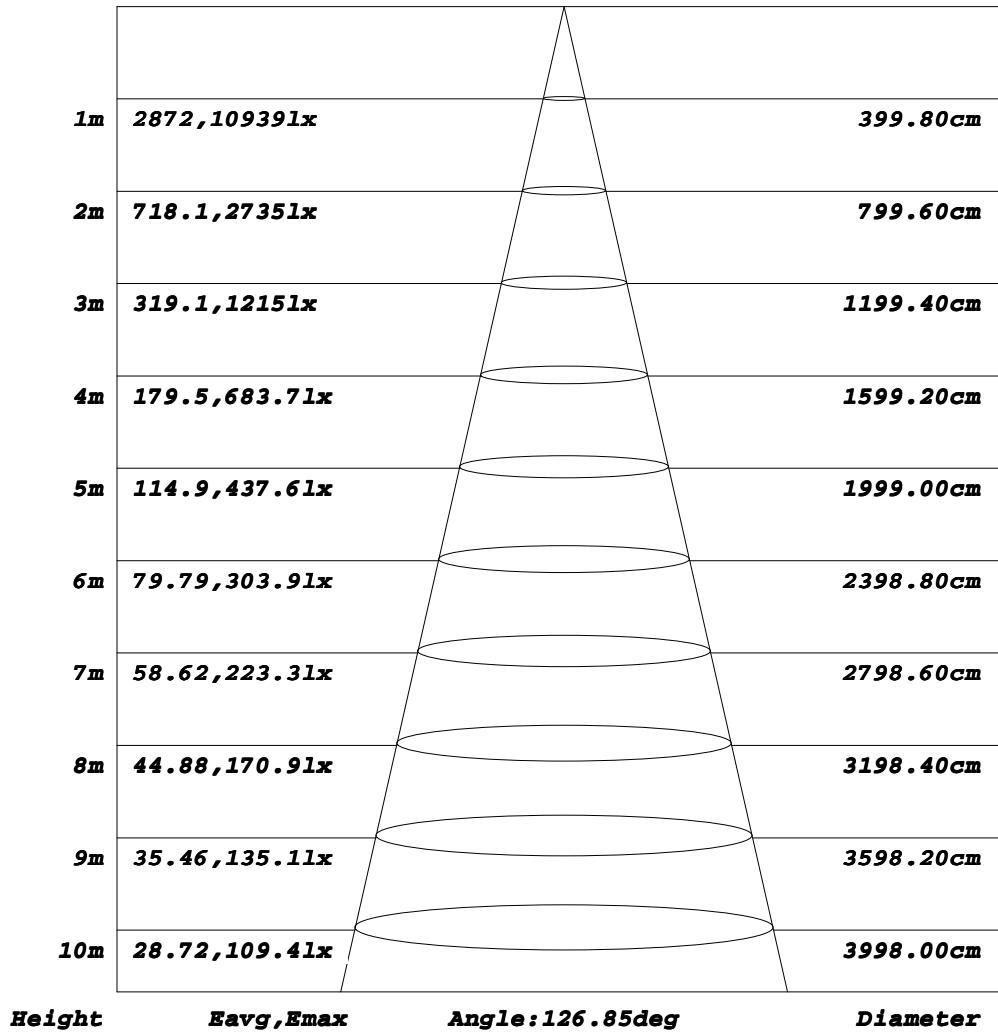


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:220.30V I:1.4020A P:301.20W PF:0.9750 Freq:50.00Hz		
Lamp Flux:41346.3x1 lm		
Name: NS90-300W	Type: LED	
MFR.: Lumega Group	DIM.: 420*330*65mm	
	SUR.: 330*340mm	

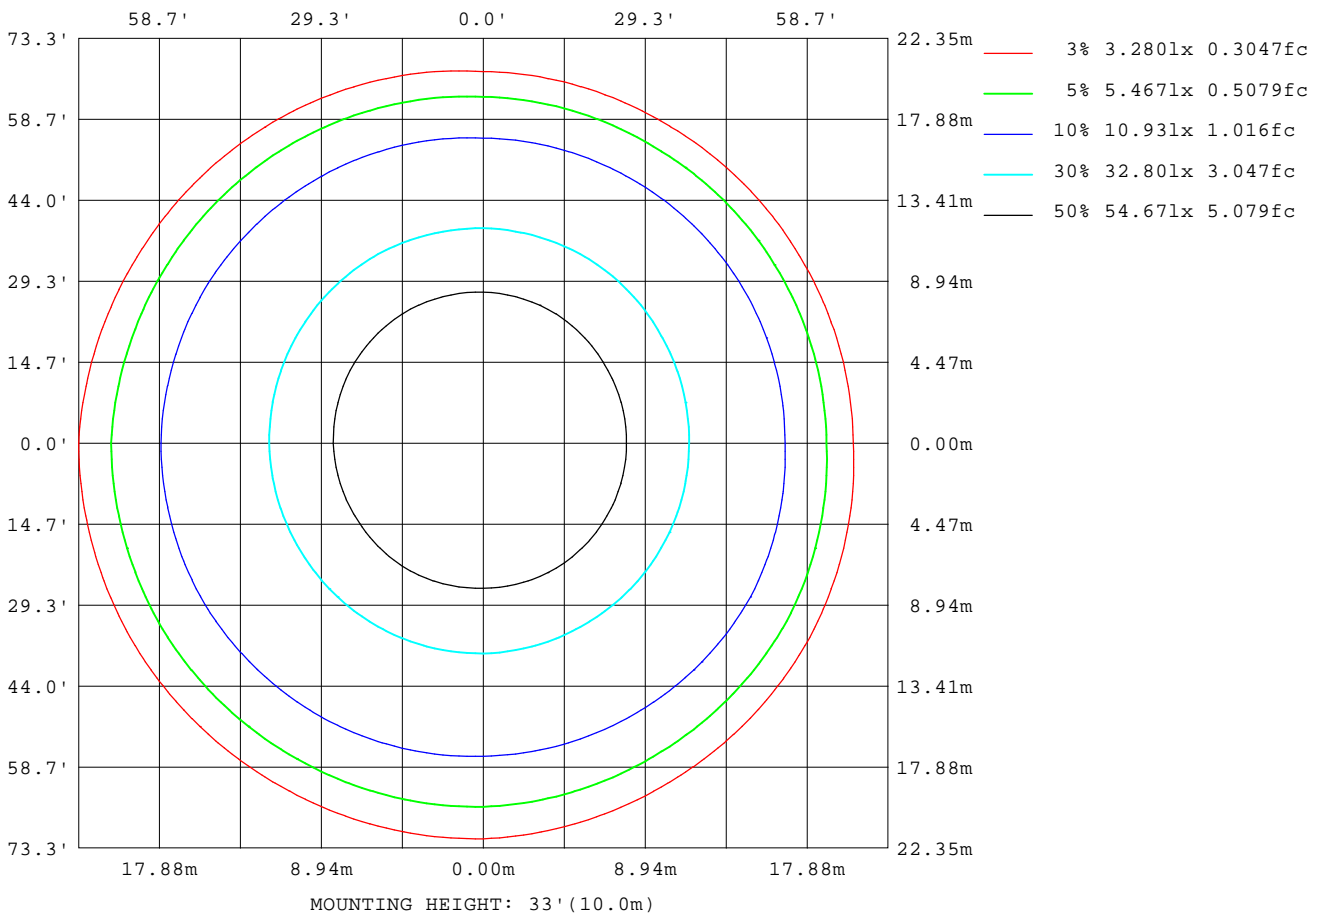

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

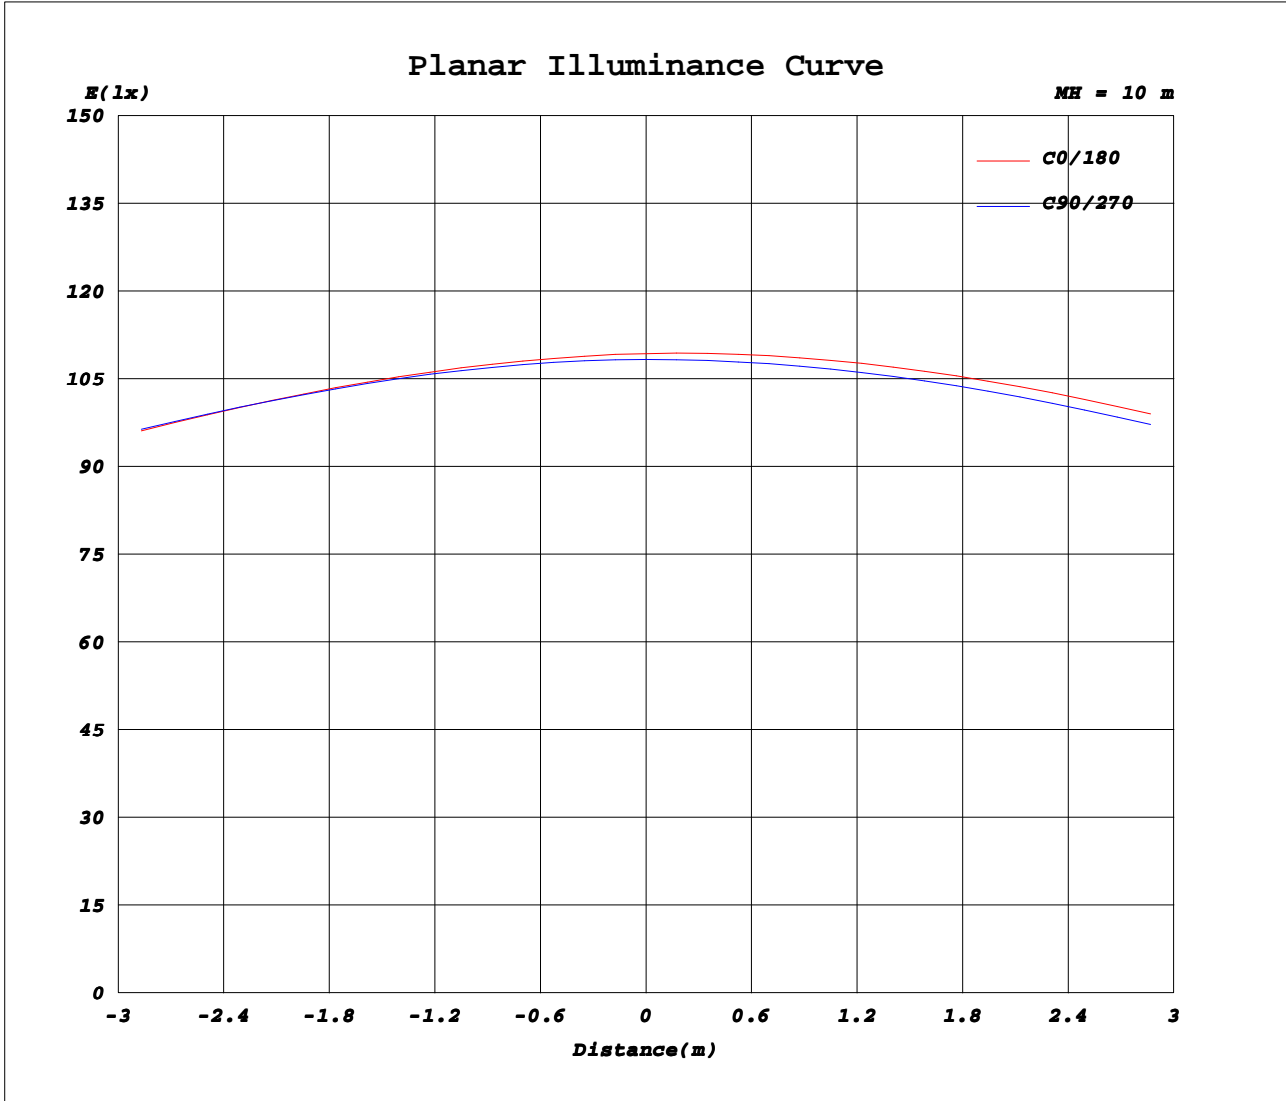

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.30V I:1.4020A P:301.20W PF:0.9750 Freq:50.00Hz Lamp Flux:41346.3x1 lm		
Name: NS90-300W	Type: LED	
MFR.: Lumega Group	DIM.: 420*330*65mm	
	SUR.: 330*340mm	

Table--1

UNIT: x10cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1093	1089	1086	1083	1081	1079	1093	1089	1086	1083	1081	1079							
5	1088	1084	1082	1082	1083	1083	1099	1094	1089	1084	1079	1075							
10	1084	1080	1079	1082	1085	1088	1105	1101	1094	1087	1079	1072							
15	1082	1078	1080	1084	1089	1094	1113	1109	1102	1093	1081	1072							
20	1086	1081	1085	1090	1096	1103	1124	1122	1115	1104	1089	1077							
25	1094	1089	1094	1101	1108	1115	1138	1139	1133	1120	1103	1087							
30	1107	1103	1110	1116	1126	1132	1156	1161	1157	1143	1124	1103							
35	1122	1122	1130	1136	1149	1154	1177	1187	1187	1173	1151	1125							
40	1137	1141	1152	1157	1175	1177	1198	1214	1221	1208	1183	1148							
45	1145	1152	1164	1176	1195	1197	1216	1234	1245	1236	1208	1163							
50	1128	1138	1151	1175	1192	1198	1217	1230	1240	1223	1194	1148							
55	1035	1058	1070	1107	1129	1149	1171	1161	1147	1087	1073	1043							
60	728	812	834	866	927	964	978	930	851	763	728	722							
65	300	369	419	490	513	548	565	467	387	310	284	290							
70	93.0	112	123	143	161	177	179	145	121	88.3	91.6	97.6							
75	41.3	50.6	53.2	54.7	62.5	67.2	69.3	62.9	56.6	37.4	41.4	45.5							
80	16.4	23.2	24.2	24.5	29.8	32.4	31.2	30.2	26.2	17.0	19.6	21.1							
85	6.92	8.39	9.65	10.0	12.1	12.5	13.7	12.2	10.8	8.97	9.32	9.39							
90	6.40	6.20	6.01	5.97	5.93	5.89	8.39	8.33	8.38	8.30	8.64	8.73							
95	7.71	7.42	7.14	6.77	6.66	6.61	8.86	9.10	9.11	9.30	9.57	9.86							
100	9.44	9.09	8.75	8.31	8.13	8.05	10.2	10.5	10.6	10.9	11.1	11.4							
105	11.3	11.0	10.6	10.2	9.93	9.79	11.9	12.2	12.3	12.7	12.9	13.2							
110	13.0	12.8	12.4	12.0	11.8	11.6	13.7	13.8	13.9	14.1	14.3	14.6							
115	14.2	14.1	13.9	13.7	13.2	13.0	15.2	15.0	14.9	15.2	15.3	15.6							
120	15.1	15.0	15.0	14.9	14.3	14.0	16.2	15.9	15.9	16.2	16.2	16.4							
125	15.9	15.9	15.9	15.7	15.2	14.8	17.0	16.8	16.8	17.0	17.1	17.2							
130	16.7	16.8	16.8	16.4	15.9	15.4	17.8	17.6	17.6	17.7	17.8	18.0							
135	17.4	17.5	17.5	17.1	16.5	16.0	18.5	18.3	18.3	18.3	18.4	18.6							
140	18.3	18.4	18.4	17.9	17.3	16.8	19.2	18.9	19.0	19.0	19.1	19.3							
145	19.6	19.7	19.6	19.0	18.4	18.0	20.2	19.9	20.0	20.0	20.1	20.3							
150	21.0	21.1	21.0	20.4	19.9	19.4	21.3	21.0	21.1	21.1	21.3	21.4							
155	22.5	22.6	22.3	21.8	21.2	20.8	22.6	22.2	22.2	22.3	22.4	22.5							
160	23.7	23.7	23.3	22.9	22.4	22.1	23.8	23.3	23.3	23.4	23.4	23.5							
165	24.7	24.5	23.9	23.7	23.3	23.2	24.8	24.3	24.2	24.3	24.2	24.3							
170	25.2	25.0	24.4	24.3	24.0	23.9	25.6	24.9	24.7	24.8	24.7	24.7							
175	25.6	25.4	24.9	24.8	24.5	24.6	25.7	25.2	24.9	24.9	24.9	24.8							
180	25.7	25.5	24.9	25.0	24.8	24.8	25.8	25.4	25.0	25.0	24.8	24.8							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: