
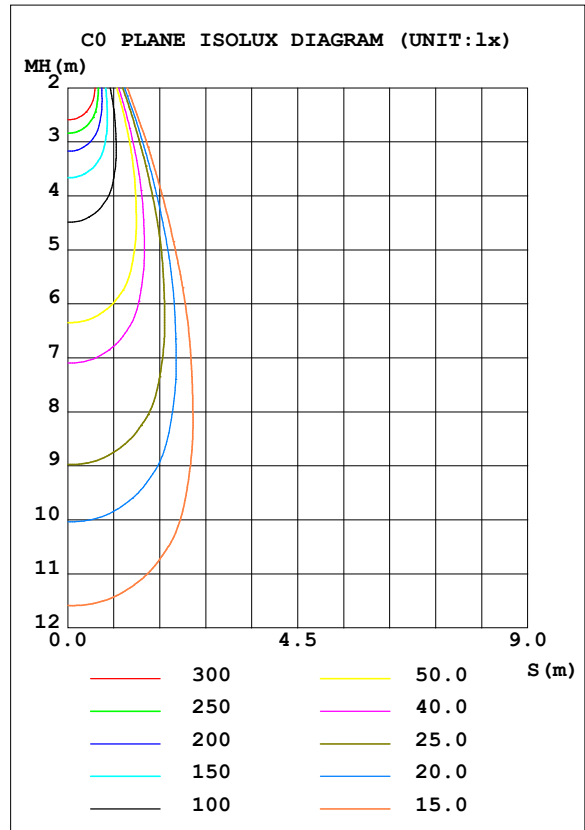


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.50V I:0.0610A P:12.700W PF:0.9370 Freq:50.00Hz		
Lamp Flux:754.697x1 lm		
Name: NS99-10W	Type: LED	
MFR.: Lumega		

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	2014	S/MH (C0/180)	0.57
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	0.61
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	754.70	η UP, DN (C0-180)	0.2, 42.4
NOMINAL FLUX (lm)	754.697	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 56.7
LAMPS INSIDE	1	η up (%)	0.9	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220	η down (%)	99.1	CIBSE SHR MAX	0.55

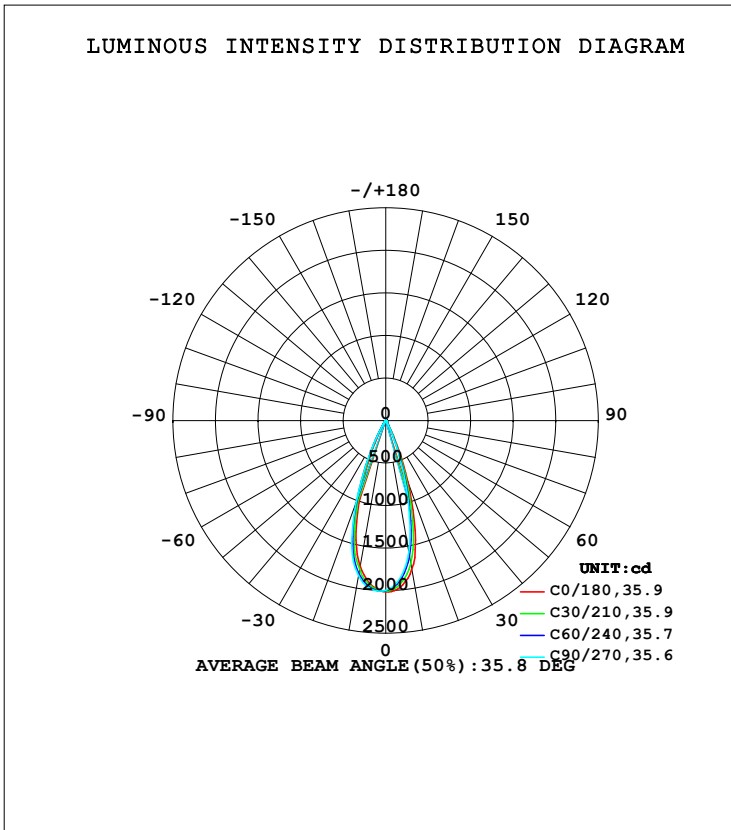

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1774	1661	1572	1601	1736	1801	1849	1861	0- 10	178.5	178.5	23.6,23.6
20	765.1	623.7	548.5	594.1	803.6	943.7	1019	1001	10- 20	353.7	532.1	70.5,70.5
30	96.89	76.74	63.82	63.88	118.2	156.4	167.3	146.4	20- 30	166.6	698.7	92.6,92.6
40	21.16	18.27	16.66	15.23	24.60	29.46	29.80	23.90	30- 40	30.72	729.4	96.7,96.7
50	5.419	5.044	4.857	4.435	6.281	7.410	7.713	7.459	40- 50	9.505	738.9	97.9,97.9
60	2.966	2.933	2.750	2.173	2.780	3.259	3.315	3.376	50- 60	3.566	742.5	98.4,98.4
70	1.756	1.697	1.528	1.171	2.060	2.425	2.481	2.506	60- 70	2.373	744.9	98.7,98.7
80	0.6150	0.5802	0.5355	0.4043	1.792	2.003	2.005	1.968	70- 80	1.659	746.5	98.9,98.9
90	0.0003	0.0033	0	0.0013	1.608	1.659	1.654	1.610	80- 90	1.089	747.6	99.1,99.1
100	0.2333	0.2750	0.2749	0.2713	1.777	1.740	1.721	1.741	90-100	0.9600	748.6	99.2,99.2
110	0.5654	0.5948	0.5954	0.5780	2.153	2.101	2.062	2.075	100-110	1.236	749.8	99.4,99.4
120	0.7640	0.7768	0.7674	0.7330	2.321	2.340	2.354	2.324	110-120	1.454	751.3	99.5,99.5
130	0.7848	0.7592	0.7410	0.7215	2.049	2.137	2.189	2.154	120-130	1.366	752.6	99.7,99.7
140	0.6397	0.6223	0.6182	0.5899	1.413	1.529	1.608	1.572	130-140	0.9888	753.6	99.9,99.9
150	0.6114	0.6157	0.6395	0.6010	0.7891	0.8682	0.9186	0.8780	140-150	0.5649	754.2	99.9,99.9
160	0.5904	0.5805	0.5828	0.5595	0.5574	0.6170	0.6650	0.6137	150-160	0.3076	754.5	100,100
170	0.4298	0.4222	0.4286	0.4080	0.4080	0.4697	0.4978	0.4714	160-170	0.1502	754.7	100,100
180	0.3550	0.3653	0.3730	0.3411	0.3099	0.3534	0.3706	0.3751	170-180	0.0382	754.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.50V I:0.0610A P:12.700W PF:0.9370 Freq:50.00Hz		
Lamp Flux:754.697x1 lm		
Name: NS99-10W	Type: LED	
MFR.: Lumega		

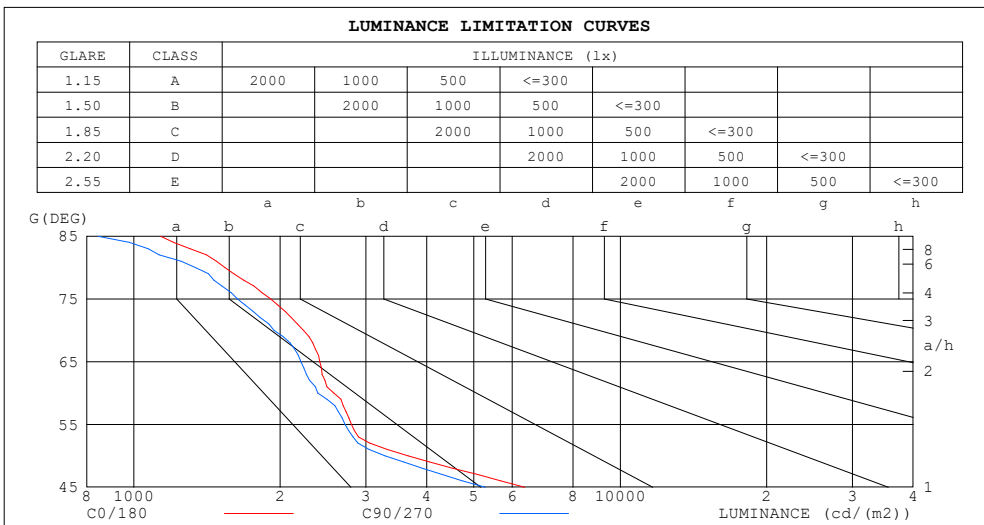

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1137	844
80	1540	1341
75	1913	1634
70	2232	1943
65	2413	2207
60	2579	2391
55	2801	2719
50	3666	3285
45	6357	5278


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.50V I:0.0610A P:12.700W PF:0.9370 Freq:50.00Hz		
Lamp Flux:754.697x1 lm		
Name: NS99-10W	Type: LED	
MFR.: Lumega		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.98	.97	.97	.95
2.0	1.06	1.03	.00	1.04	1.01	.99	1.01	.99	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.01	.97	.94	.99	.96	.93	.97	.94	.91	.94	.92	.90	.92	.90	.88	.87
4.0	.96	.92	.88	.95	.91	.88	.93	.89	.87	.91	.88	.86	.89	.87	.85	.83
5.0	.92	.87	.84	.91	.87	.84	.89	.86	.83	.88	.85	.82	.86	.83	.81	.80
6.0	.88	.84	.80	.87	.83	.80	.86	.82	.79	.85	.81	.79	.83	.80	.78	.77
7.0	.85	.80	.77	.84	.80	.77	.83	.79	.76	.82	.78	.76	.81	.78	.75	.74
8.0	.82	.77	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.78	.75	.73	.71
9.0	.79	.74	.71	.78	.74	.71	.77	.73	.71	.76	.73	.70	.76	.72	.70	.69
10.0	.76	.71	.68	.75	.71	.68	.75	.71	.68	.74	.70	.68	.73	.70	.68	.67

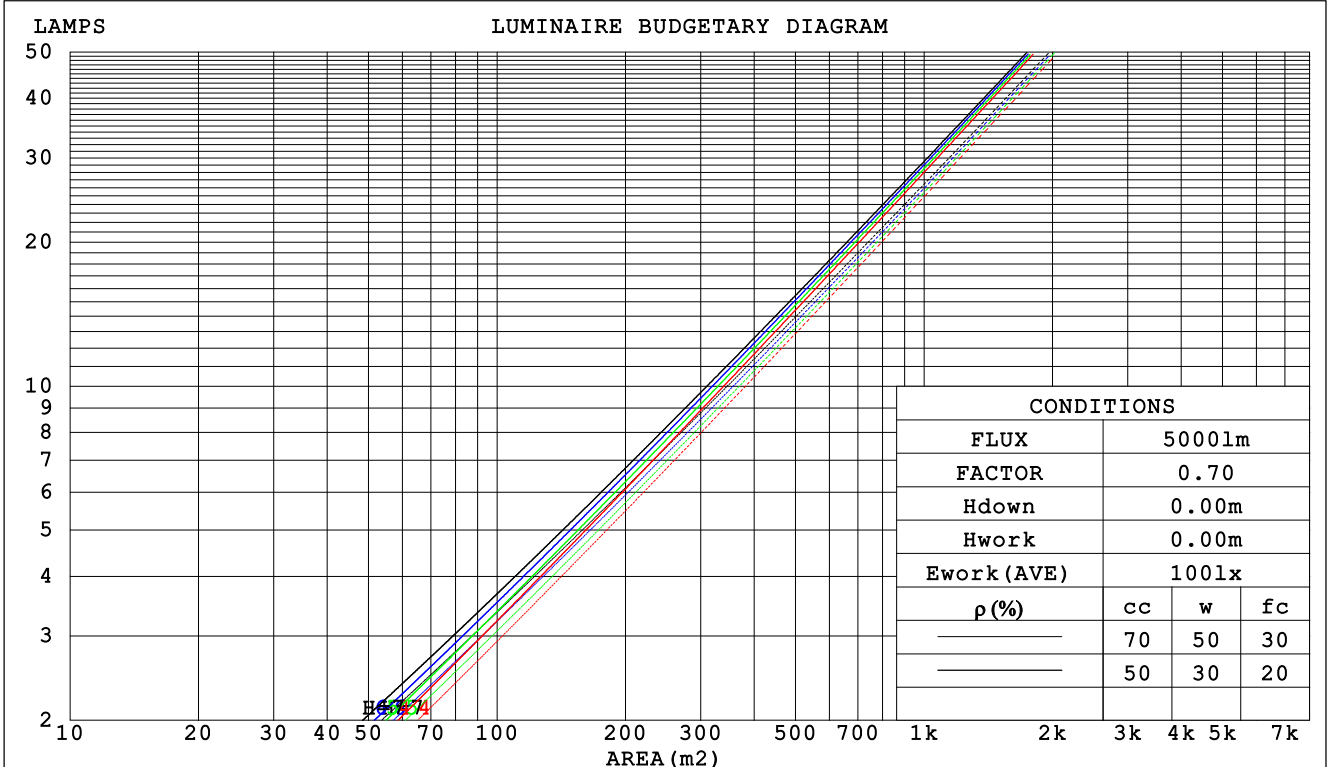

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.50V I:0.0610A P:12.700W PF:0.9370 Freq:50.00Hz		
Lamp Flux:754.697x1 lm		
Name: NS99-10W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.151	.086	.027	.144	.082	.026	.131	.075	.024	.119	.069	.022	.108	.063	.020	
2.0	.140	.077	.024	.134	.074	.023	.124	.069	.021	.114	.064	.020	.104	.059	.019	
3.0	.131	.070	.021	.126	.068	.020	.117	.064	.019	.109	.060	.018	.101	.056	.017	
4.0	.123	.064	.019	.119	.062	.018	.111	.059	.018	.104	.056	.017	.097	.053	.016	
5.0	.117	.059	.017	.113	.058	.017	.106	.055	.016	.100	.053	.016	.094	.050	.015	
6.0	.111	.055	.016	.108	.054	.016	.102	.052	.015	.096	.050	.015	.091	.048	.014	
7.0	.105	.052	.015	.103	.051	.015	.098	.049	.014	.093	.048	.014	.088	.046	.013	
8.0	.101	.049	.014	.098	.048	.014	.094	.047	.013	.089	.045	.013	.085	.044	.013	
9.0	.096	.047	.013	.094	.046	.013	.090	.045	.013	.086	.043	.012	.083	.042	.012	
10.0	.093	.044	.012	.091	.044	.012	.087	.043	.012	.084	.041	.012	.080	.040	.012	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.176	.165	.154	.151	.141	.133	.103	.097	.092	.059	.056	.053	.019	.018	.017	
2.0	.159	.140	.124	.136	.120	.107	.093	.083	.075	.054	.048	.044	.017	.016	.014	
3.0	.145	.121	.101	.124	.104	.088	.085	.072	.062	.049	.042	.036	.016	.014	.012	
4.0	.133	.105	.084	.114	.091	.073	.079	.064	.052	.045	.037	.031	.015	.012	.010	
5.0	.123	.093	.071	.106	.081	.062	.073	.056	.044	.042	.033	.026	.014	.011	.009	
6.0	.115	.084	.061	.099	.072	.053	.068	.051	.038	.039	.030	.022	.013	.010	.007	
7.0	.108	.076	.053	.092	.066	.046	.064	.046	.033	.037	.027	.020	.012	.009	.006	
8.0	.101	.069	.047	.087	.060	.041	.060	.042	.029	.035	.025	.017	.011	.008	.006	
9.0	.096	.064	.042	.083	.055	.036	.057	.039	.026	.033	.023	.015	.011	.008	.005	
10.0	.091	.059	.038	.079	.051	.033	.054	.036	.023	.032	.021	.014	.010	.007	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.50V I:0.0610A P:12.700W PF:0.9370 Freq:50.00Hz		
Lamp Flux:754.697x1 lm		
Name: NS99-10W	Type: LED	
MFR.: Lumega		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.0	9.7	9.2	9.9	10.0	7.8	8.5	8.0	8.7	8.9
3H	9.2	9.9	9.5	10.1	10.3	8.1	8.8	8.4	9.0	9.2
4H	9.3	10.0	9.6	10.2	10.4	8.3	8.9	8.5	9.1	9.4
6H	9.4	10.0	9.7	10.2	10.5	8.3	8.9	8.6	9.2	9.4
8H	9.4	10.0	9.7	10.2	10.5	8.3	8.9	8.6	9.2	9.4
12H	9.4	9.9	9.7	10.2	10.5	8.3	8.9	8.6	9.1	9.4
4H 2H	8.9	9.6	9.2	9.8	10.0	7.9	8.5	8.1	8.7	9.0
3H	9.3	9.9	9.6	10.2	10.4	8.3	8.9	8.7	9.2	9.5
4H	9.5	10.0	9.8	10.3	10.6	8.5	9.1	8.9	9.4	9.7
6H	9.6	10.1	10.0	10.4	10.8	8.7	9.1	9.0	9.5	9.8
8H	9.6	10.0	10.0	10.4	10.8	8.7	9.1	9.1	9.5	9.8
12H	9.6	10.0	10.0	10.4	10.8	8.7	9.1	9.1	9.4	9.8
8H 4H	9.5	9.9	9.9	10.3	10.6	8.6	9.0	9.0	9.4	9.7
6H	9.6	10.0	10.1	10.4	10.8	8.7	9.1	9.2	9.5	9.9
8H	9.7	10.0	10.1	10.4	10.9	8.8	9.1	9.3	9.5	10.0
12H	9.7	9.9	10.2	10.4	10.9	8.8	9.1	9.3	9.5	10.0
12H 4H	9.4	9.8	9.9	10.2	10.6	8.5	8.9	9.0	9.3	9.7
6H	9.6	9.9	10.1	10.3	10.8	8.7	9.0	9.2	9.5	9.9
8H	9.6	9.9	10.1	10.4	10.9	8.8	9.1	9.3	9.5	10.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.0 / - 2.2					+ 1.3 / - 1.8				
1.5H	+ 3.7 / - 2.1					+ 2.8 / - 1.8				
2.0H	+ 2.4 / - 0.9					+ 1.7 / - 0.8				

CIE Pub.117, 754.7 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.0)
 Area: 0.0023 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.50V I:0.0610A P:12.700W PF:0.9370 Freq:50.00Hz		
Lamp Flux:754.697x1 lm		
Name: NS99-10W	Type: LED	
MFR.: Lumega		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	90	84	80	89	83	80	88	83	80	76
0.80	97	91	88	96	91	88	95	90	87	84
1.00	100	95	92	100	95	92	98	94	91	87
1.25	104	99	96	103	99	96	101	97	95	91
1.50	107	102	99	105	101	99	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	104	103	96
4.00	114	111	109	112	110	108	108	106	105	98
5.00	115	113	111	113	111	110	109	108	106	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.50V I:0.0610A P:12.700W PF:0.9370 Freq:50.00Hz		
Lamp Flux:754.697x1 lm		
Name: NS99-10W	Type: LED	
MFR.: Lumega		

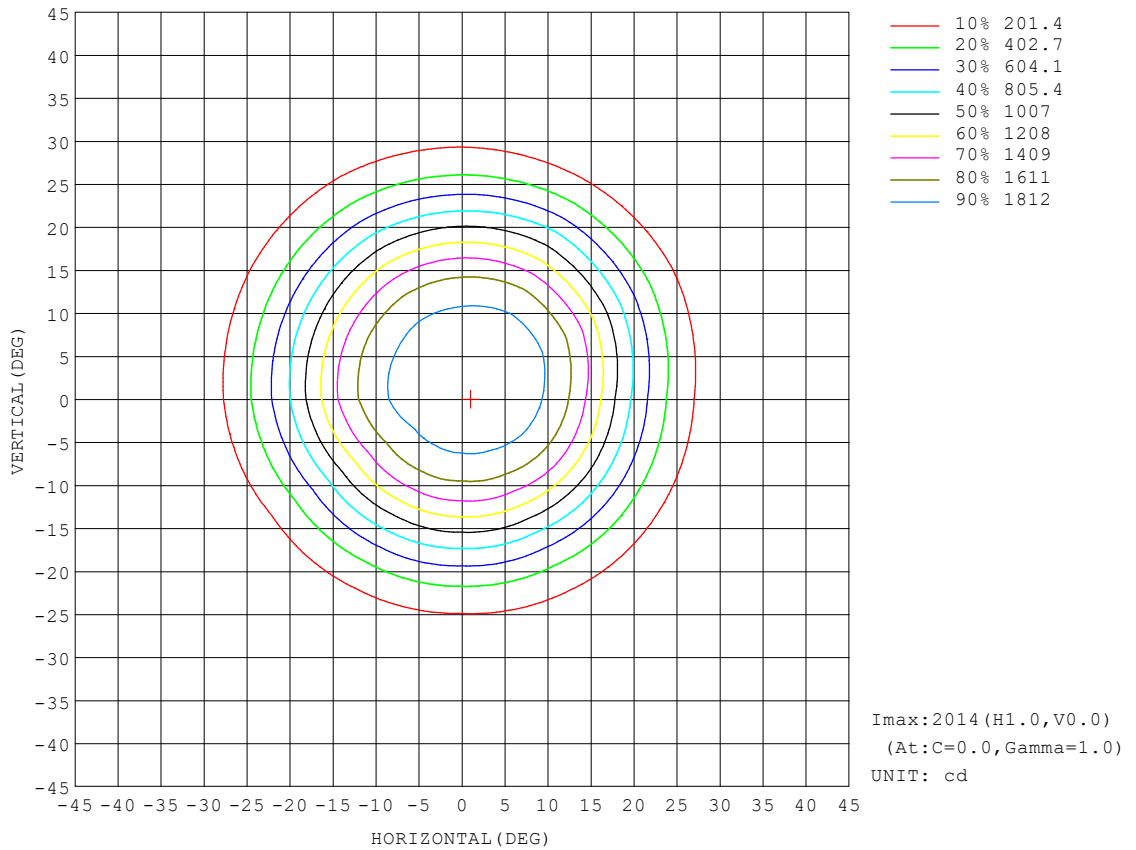


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

AAI Figure

Test:U:220.50V I:0.0610A P:12.700W PF:0.9370 Freq:50.00Hz		
Lamp Flux:754.697x1 lm		
Name: NS99-10W	Type: LED	
MFR.: Lumega		

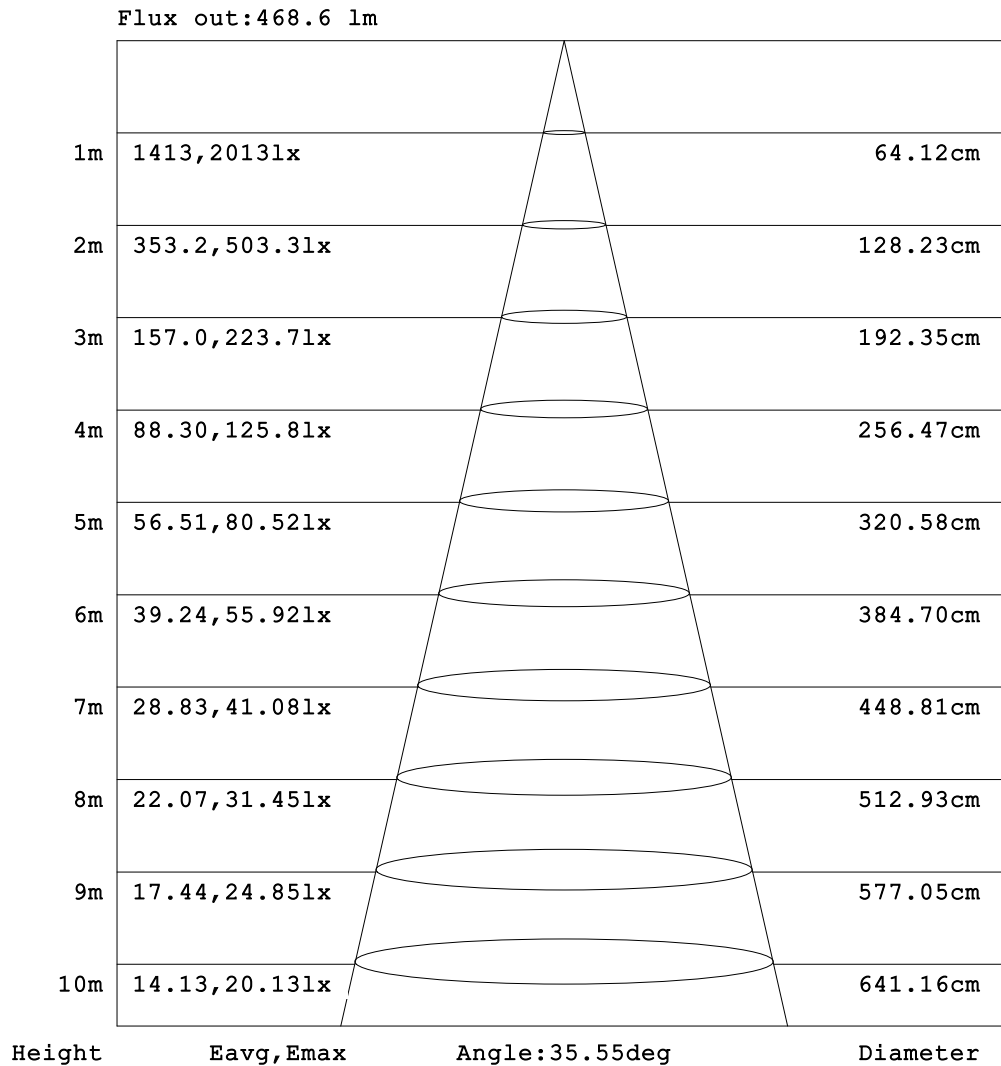


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.50V I:0.0610A P:12.700W PF:0.9370 Freq:50.00Hz Lamp Flux:754.697x1 lm		
Name: NS99-10W	Type: LED	
MFR.: Lumega		

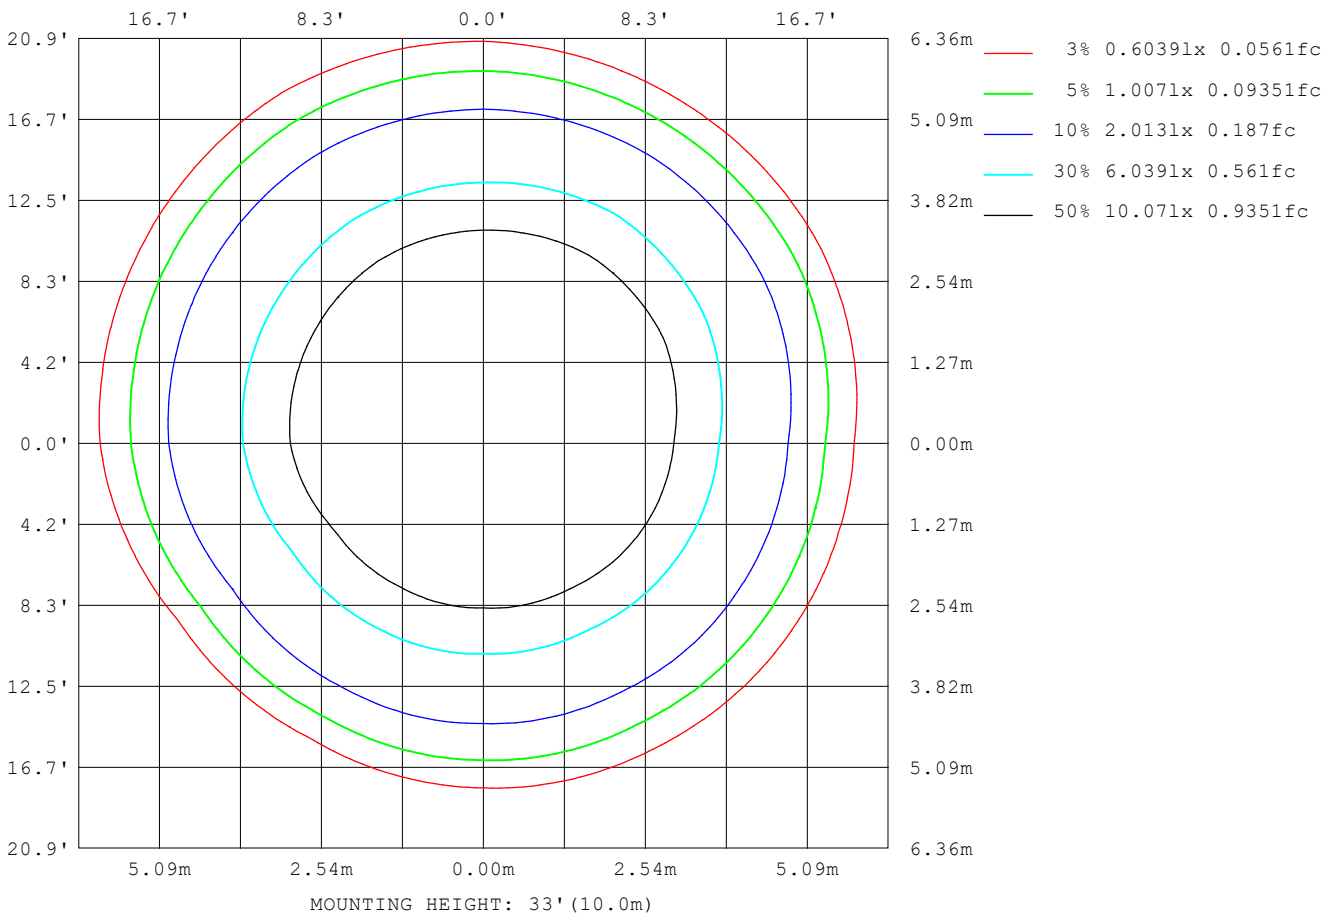

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

Planar Illuminance Curve

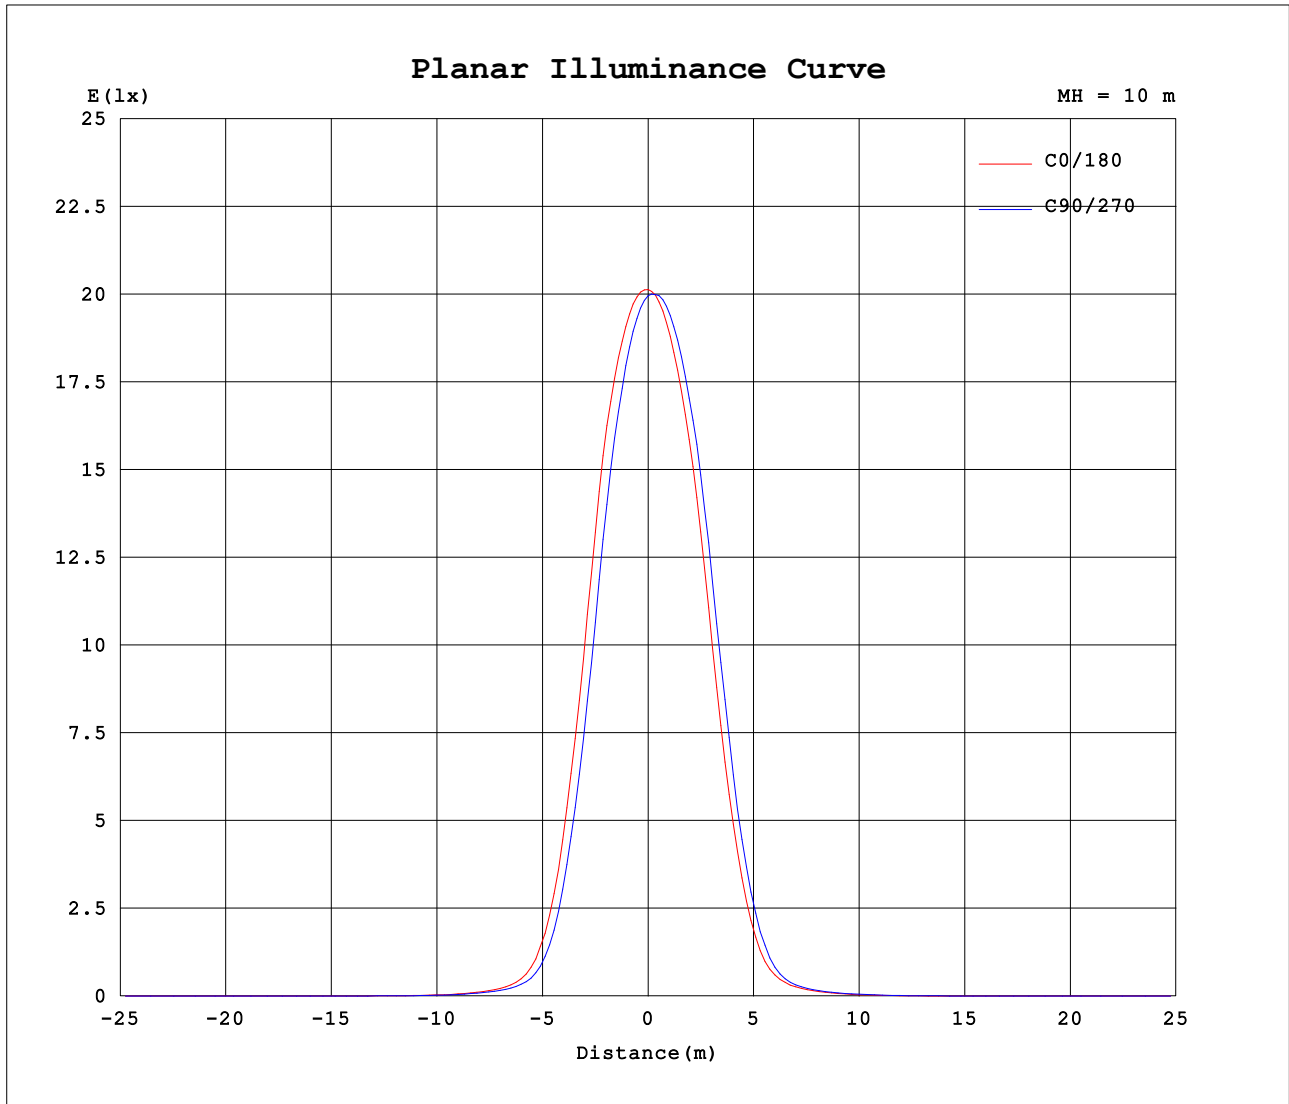

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.50V I:0.0610A P:12.700W PF:0.9370 Freq:50.00Hz		
Lamp Flux:754.697x1 lm		
Name: NS99-10W	Type: LED	
MFR.: Lumega		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	2013	2007	1999	1996	1990	1989	2013	2007	1999	1996	1990	1989							
5	1966	1931	1891	1871	1865	1876	1942	1958	1978	1988	1996	1986							
10	1774	1707	1615	1572	1581	1620	1736	1775	1827	1849	1875	1848							
15	1338	1220	1100	1055	1067	1135	1354	1433	1509	1542	1581	1525							
20	765	671	577	548	565	624	804	900	988	1019	1042	959							
25	311	257	217	197	205	238	365	423	480	496	505	437							
30	96.9	83.3	70.2	63.8	57.2	70.6	118	144	169	167	154	139							
35	41.2	37.4	33.0	30.3	24.3	30.3	48.9	55.4	62.2	58.2	48.7	48.9							
40	21.2	19.3	17.2	16.7	13.6	16.8	24.6	27.9	31.0	29.8	22.1	25.7							
45	10.3	9.61	8.73	8.58	8.02	8.79	12.5	13.9	15.7	15.8	13.5	14.4							
50	5.42	5.14	4.95	4.86	4.39	4.48	6.28	6.97	7.85	7.71	7.78	7.14							
55	3.70	3.76	3.77	3.59	3.09	2.91	3.46	3.85	4.26	4.18	4.19	4.10							
60	2.97	2.95	2.91	2.75	2.24	2.11	2.78	3.12	3.39	3.31	3.34	3.41							
65	2.35	2.37	2.31	2.14	1.71	1.58	2.27	2.56	2.82	2.77	2.76	2.84							
70	1.76	1.73	1.66	1.53	1.21	1.13	2.06	2.32	2.53	2.48	2.47	2.54							
75	1.14	1.10	1.07	0.97	0.77	0.72	1.90	2.11	2.28	2.21	2.20	2.22							
80	0.62	0.58	0.58	0.54	0.42	0.38	1.79	1.94	2.06	2.00	1.98	1.96							
85	0.23	0.20	0.21	0.17	0.16	0.13	1.71	1.79	1.87	1.83	1.79	1.76							
90	0.00	0.00	0.01	0.00	0.00	0.00	1.61	1.62	1.69	1.65	1.62	1.60							
95	0.08	0.11	0.12	0.11	0.12	0.08	1.64	1.61	1.65	1.63	1.63	1.64							
100	0.23	0.26	0.29	0.27	0.29	0.25	1.78	1.72	1.76	1.72	1.74	1.75							
105	0.41	0.44	0.46	0.45	0.46	0.41	1.94	1.89	1.90	1.86	1.88	1.90							
110	0.57	0.58	0.61	0.60	0.60	0.55	2.15	2.10	2.11	2.06	2.07	2.08							
115	0.68	0.70	0.71	0.70	0.70	0.66	2.29	2.26	2.29	2.25	2.24	2.24							
120	0.76	0.78	0.78	0.77	0.77	0.70	2.32	2.30	2.38	2.35	2.33	2.31							
125	0.80	0.80	0.80	0.77	0.79	0.72	2.23	2.25	2.34	2.33	2.30	2.28							
130	0.78	0.76	0.75	0.74	0.75	0.70	2.05	2.08	2.19	2.19	2.17	2.14							
135	0.71	0.69	0.68	0.66	0.67	0.62	1.78	1.81	1.94	1.94	1.93	1.90							
140	0.64	0.62	0.62	0.62	0.62	0.56	1.41	1.46	1.59	1.61	1.59	1.55							
145	0.60	0.60	0.61	0.62	0.60	0.57	1.06	1.10	1.22	1.23	1.21	1.18							
150	0.61	0.61	0.62	0.64	0.62	0.58	0.79	0.82	0.92	0.92	0.89	0.86							
155	0.62	0.61	0.62	0.64	0.63	0.57	0.64	0.67	0.74	0.75	0.70	0.69							
160	0.59	0.58	0.58	0.58	0.59	0.53	0.56	0.58	0.66	0.67	0.62	0.61							
165	0.52	0.50	0.50	0.50	0.52	0.47	0.49	0.51	0.59	0.59	0.55	0.54							
170	0.43	0.42	0.42	0.43	0.43	0.39	0.41	0.44	0.50	0.50	0.47	0.47							
175	0.37	0.36	0.36	0.36	0.38	0.34	0.34	0.36	0.43	0.43	0.41	0.40							
180	0.36	0.36	0.37	0.37	0.36	0.32	0.31	0.32	0.38	0.37	0.37	0.38							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: