
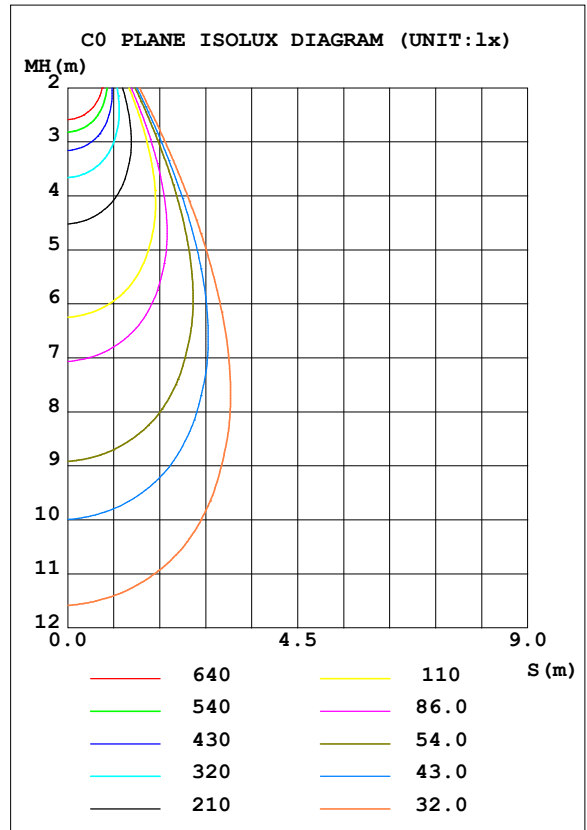


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.50V I:0.1780A P:37.600W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2538.4x1 lm		
Name: NS99-40W	Type: LED	
MFR.: Lumega		

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	4296	S/MH (C0/180)	0.73
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	0.70
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	2538.4	η UP, DN (C0-180)	0.3, 50.0
NOMINAL FLUX (lm)	2538.4	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 49.0
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	220	η down (%)	99.0	CIBSE SHR MAX	0.75

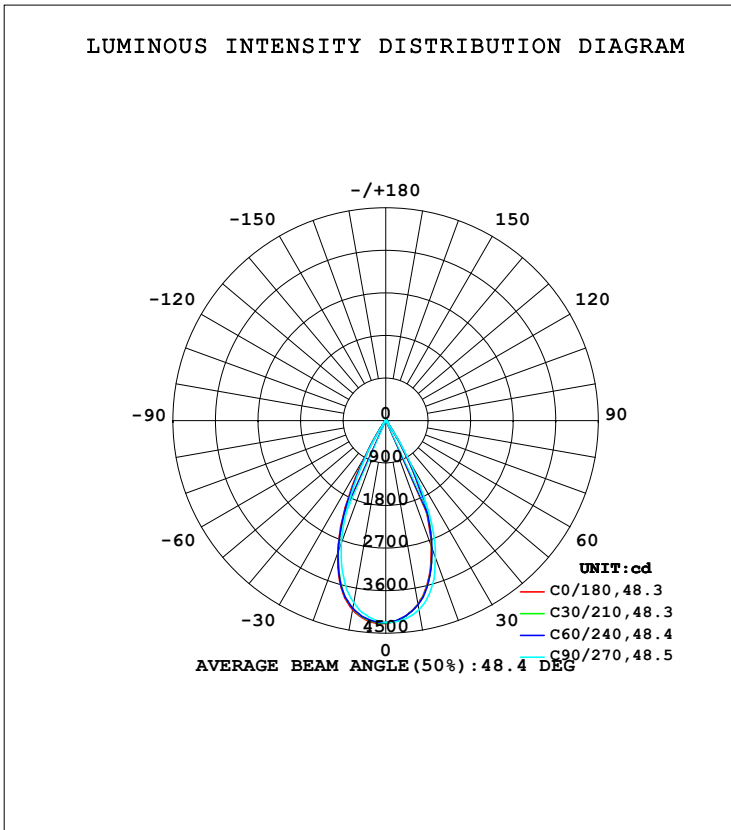

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3938	3949	4058	3995	4059	4029	3908	3930	0- 10	393.9	393.9	15.5,15.5
20	2817	2852	3076	2927	2975	2943	2755	2842	10- 20	982.1	1376	54.2,54.2
30	864.7	945.8	1072	905.8	932.0	830.9	731.9	869.2	20- 30	867.5	2244	88.4,88.4
40	78.21	81.91	86.17	78.95	87.62	81.14	75.20	86.54	30- 40	195.8	2439	96.1,96.1
50	26.35	27.20	25.43	24.53	30.09	27.77	26.77	29.04	40- 50	35.64	2475	97.5,97.5
60	13.63	14.36	12.10	12.21	15.36	14.61	14.13	14.58	50- 60	16.87	2492	98.2,98.2
70	7.456	8.078	7.038	6.779	10.45	10.07	9.357	9.696	60- 70	10.88	2503	98.6,98.6
80	2.409	2.763	2.677	2.410	6.411	6.229	6.192	6.328	70- 80	6.578	2509	98.9,98.9
90	0.5130	0.4991	0.4726	0.4674	5.170	5.229	5.291	5.247	80- 90	3.783	2513	99,99
100	1.316	1.274	1.207	1.254	6.643	6.727	6.801	6.715	90-100	3.718	2517	99.1,99.1
110	2.041	1.993	1.934	1.968	7.517	7.510	7.532	7.556	100-110	4.683	2521	99.3,99.3
120	2.560	2.520	2.488	2.511	7.427	7.398	7.312	7.419	110-120	4.857	2526	99.5,99.5
130	2.824	2.797	2.819	2.813	6.778	6.693	6.526	6.658	120-130	4.382	2531	99.7,99.7
140	2.754	2.740	2.774	2.736	5.512	5.417	5.216	5.374	130-140	3.450	2534	99.8,99.8
150	2.427	2.415	2.441	2.406	3.762	3.653	3.494	3.641	140-150	2.250	2536	99.9,99.9
160	2.214	2.183	2.246	2.194	2.386	2.338	2.297	2.296	150-160	1.214	2538	100,100
170	1.875	1.877	1.906	1.891	1.928	1.896	1.801	1.823	160-170	0.5868	2538	100,100
180	1.835	1.832	1.784	1.793	1.847	1.819	1.767	1.810	170-180	0.1744	2538	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.50V I:0.1780A P:37.600W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2538.4x1 lm		
Name: NS99-40W	Type: LED	
MFR.: Lumega		

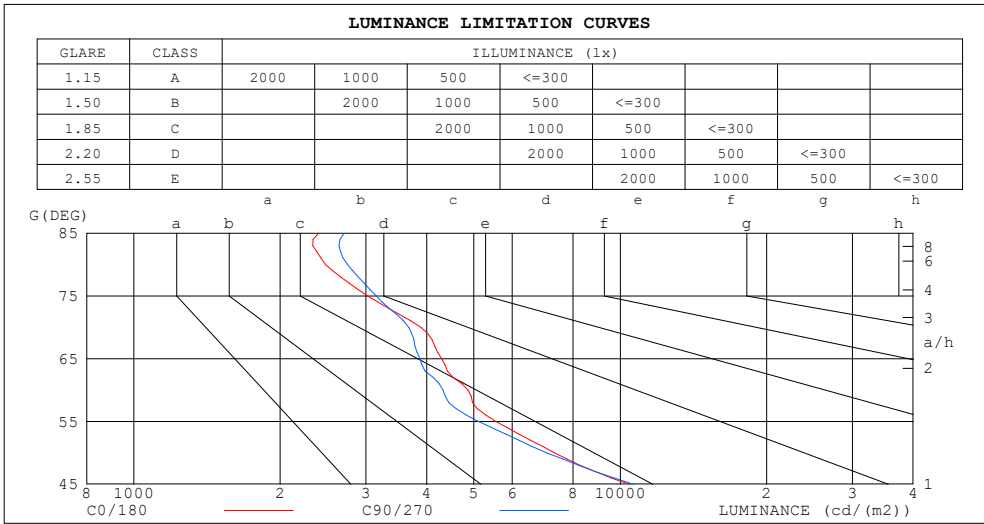

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2397	2709
80	2477	2753
75	3024	3152
70	3893	3675
65	4297	3876
60	4866	4320
55	5553	5112
50	7321	7065
45	10434	10643


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.50V I:0.1780A P:37.600W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2538.4x1 lm		
Name: NS99-40W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.97	.96	.96	.94
2.0	1.05	1.01	.98	1.03	.00	.97	.99	.97	.95	.96	.94	.92	.94	.92	.90	.89
3.0	.99	.94	.91	.97	.93	.90	.95	.91	.88	.92	.89	.87	.90	.87	.85	.84
4.0	.93	.88	.85	.92	.88	.84	.90	.86	.83	.88	.85	.82	.86	.83	.81	.80
5.0	.89	.83	.80	.88	.83	.79	.86	.82	.78	.84	.80	.78	.82	.79	.77	.76
6.0	.84	.79	.75	.83	.78	.75	.82	.78	.74	.80	.77	.74	.79	.76	.73	.72
7.0	.80	.75	.71	.79	.74	.71	.78	.74	.71	.77	.73	.70	.76	.72	.70	.68
8.0	.76	.71	.68	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.65
9.0	.73	.68	.64	.72	.68	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.62
10.0	.70	.65	.61	.69	.65	.61	.69	.64	.61	.68	.64	.61	.67	.63	.61	.60

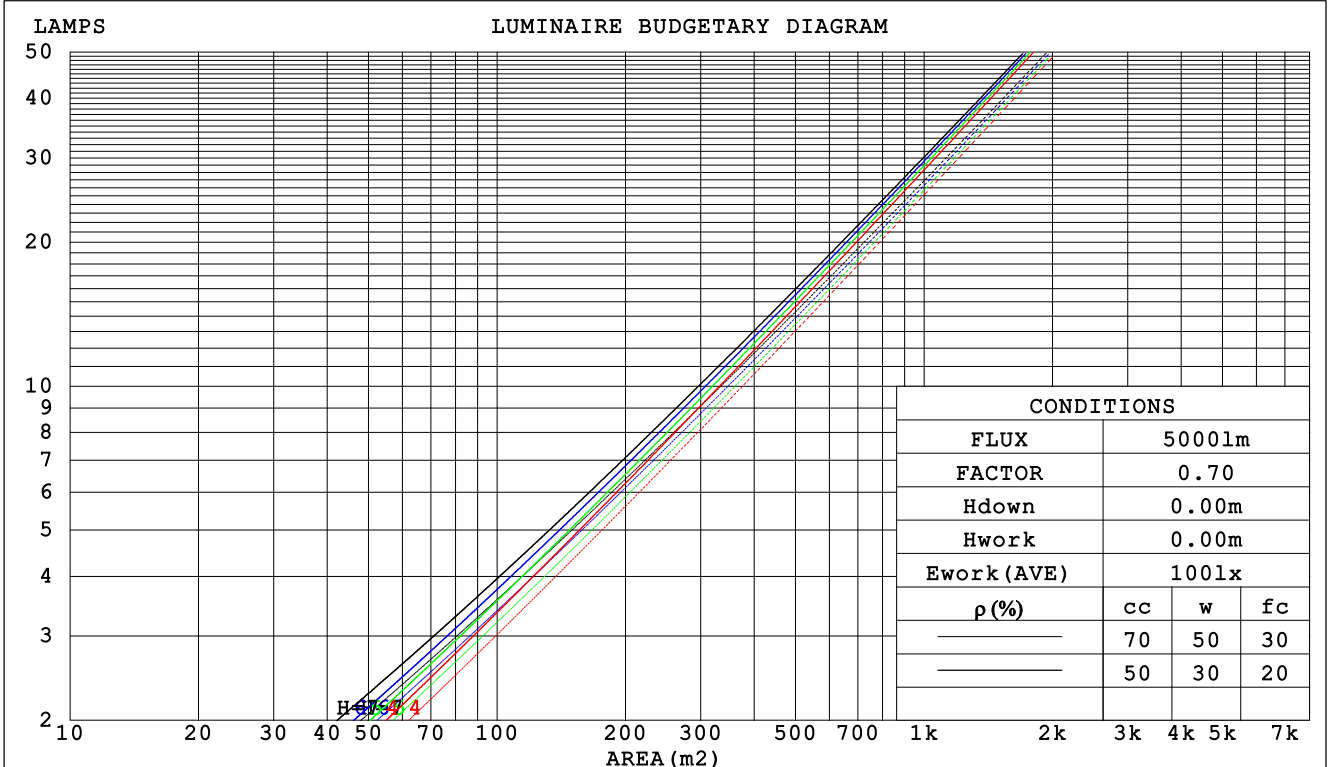

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.50V I:0.1780A P:37.600W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2538.4x1 lm		
Name: NS99-40W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.163	.093	.029	.156	.089	.028	.143	.082	.026	.131	.076	.024	.120	.070	.022	
2.0	.154	.084	.026	.148	.081	.025	.137	.076	.024	.127	.071	.022	.117	.066	.021	
3.0	.145	.077	.023	.140	.075	.023	.130	.071	.021	.122	.067	.020	.114	.063	.020	
4.0	.137	.071	.021	.133	.069	.021	.125	.066	.020	.117	.063	.019	.110	.060	.018	
5.0	.130	.066	.019	.126	.065	.019	.119	.062	.018	.113	.060	.018	.107	.057	.017	
6.0	.124	.062	.018	.121	.061	.018	.114	.059	.017	.109	.057	.017	.103	.054	.016	
7.0	.118	.058	.017	.115	.057	.016	.110	.056	.016	.105	.054	.016	.100	.052	.015	
8.0	.113	.055	.016	.111	.054	.015	.106	.053	.015	.101	.051	.015	.097	.050	.015	
9.0	.109	.052	.015	.106	.052	.015	.102	.050	.014	.098	.049	.014	.094	.048	.014	
10.0	.104	.050	.014	.102	.049	.014	.098	.048	.014	.095	.047	.013	.091	.046	.013	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.116	.116	.116	.066	.066	.066	.021	.021	.021	
1.0	.178	.165	.154	.152	.142	.132	.104	.097	.091	.060	.056	.053	.019	.018	.017	
2.0	.162	.140	.122	.138	.121	.106	.095	.084	.074	.055	.049	.043	.018	.016	.014	
3.0	.148	.121	.100	.127	.105	.086	.087	.073	.061	.050	.042	.036	.016	.014	.012	
4.0	.137	.106	.083	.118	.092	.072	.081	.064	.051	.047	.037	.030	.015	.012	.010	
5.0	.128	.094	.070	.110	.082	.061	.075	.057	.043	.044	.034	.025	.014	.011	.008	
6.0	.120	.085	.060	.103	.074	.052	.071	.051	.037	.041	.030	.022	.013	.010	.007	
7.0	.113	.077	.052	.097	.067	.045	.067	.047	.032	.039	.028	.019	.013	.009	.006	
8.0	.107	.071	.046	.092	.061	.040	.064	.043	.028	.037	.025	.017	.012	.008	.006	
9.0	.102	.065	.041	.088	.057	.036	.061	.040	.025	.035	.024	.015	.011	.008	.005	
10.0	.097	.061	.037	.084	.053	.032	.058	.037	.023	.034	.022	.014	.011	.007	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.50V I:0.1780A P:37.600W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2538.4x1 lm		
Name: NS99-40W	Type: LED	
MFR.: Lumega		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.7	15.6	15.0	15.7	15.9	15.7	16.5	15.9	16.7	16.8
3H	14.8	15.5	15.0	15.7	15.9	15.6	16.4	15.9	16.6	16.8
4H	14.8	15.5	15.0	15.7	15.9	15.6	16.3	15.9	16.6	16.8
6H	14.7	15.4	15.0	15.6	15.9	15.6	16.3	15.9	16.5	16.8
8H	14.7	15.3	15.0	15.6	15.9	15.6	16.2	15.9	16.5	16.7
12H	14.7	15.3	15.0	15.6	15.9	15.5	16.1	15.9	16.4	16.7
4H 2H	14.6	15.3	14.9	15.5	15.8	15.5	16.2	15.8	16.5	16.7
3H	14.7	15.3	15.0	15.6	15.9	15.5	16.1	15.9	16.4	16.7
4H	14.7	15.3	15.1	15.6	15.9	15.5	16.1	15.9	16.4	16.7
6H	14.7	15.2	15.1	15.6	15.9	15.5	16.0	15.9	16.4	16.7
8H	14.7	15.2	15.1	15.5	15.9	15.5	16.0	15.9	16.3	16.7
12H	14.7	15.1	15.1	15.5	15.9	15.5	15.9	15.9	16.3	16.7
8H 4H	14.6	15.1	15.0	15.5	15.9	15.4	15.9	15.8	16.3	16.7
6H	14.7	15.0	15.1	15.5	15.9	15.4	15.8	15.9	16.2	16.7
8H	14.7	15.0	15.1	15.4	15.9	15.4	15.8	15.9	16.2	16.7
12H	14.7	14.9	15.1	15.4	15.9	15.4	15.7	15.9	16.2	16.7
12H 4H	14.6	15.0	15.0	15.4	15.8	15.4	15.8	15.8	16.2	16.6
6H	14.6	15.0	15.1	15.4	15.9	15.4	15.7	15.9	16.2	16.6
8H	14.6	14.9	15.1	15.4	15.9	15.4	15.7	15.9	16.2	16.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.0 / - 2.0					+ 2.7 / - 2.4				
1.5H	+ 3.5 / - 1.7					+ 4.5 / - 2.1				
2.0H	+ 1.7 / - 0.8					+ 1.7 / - 1.1				

CIE Pub.117, 2538 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.2)
 Area: 0.0056 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.50V I:0.1780A P:37.600W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2538.4x1 lm		
Name: NS99-40W	Type: LED	
MFR.: Lumega		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	83	80	89	83	80	88	83	79	76
0.80	96	91	87	96	90	87	94	90	87	83
1.00	100	95	91	99	94	91	98	94	91	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	107	104	101	105	102	99	94
2.50	110	107	104	109	105	103	106	103	101	95
3.00	112	109	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	108	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.50V I:0.1780A P:37.600W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2538.4x1 lm		
Name: NS99-40W	Type: LED	
MFR.: Lumega		

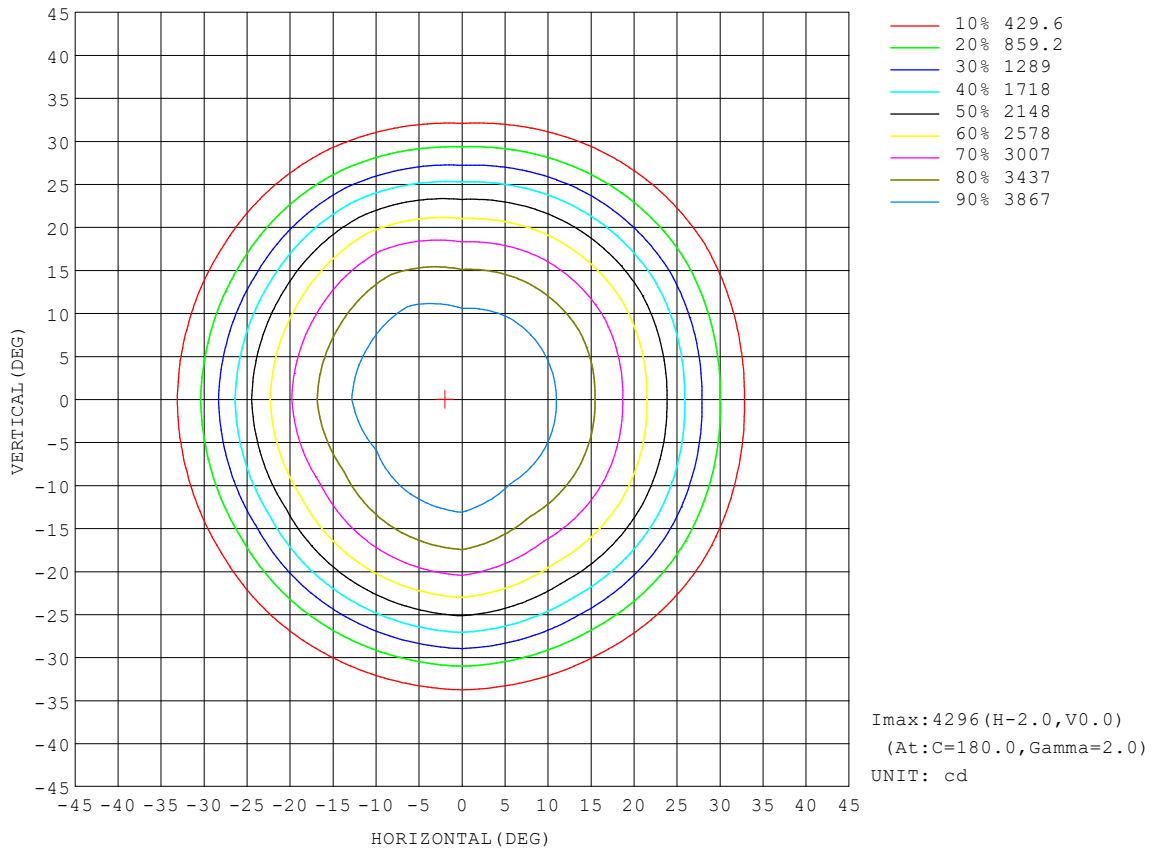


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

AAI Figure

Test:U:220.50V I:0.1780A P:37.600W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2538.4x1 lm		
Name: NS99-40W	Type: LED	
MFR.: Lumega		

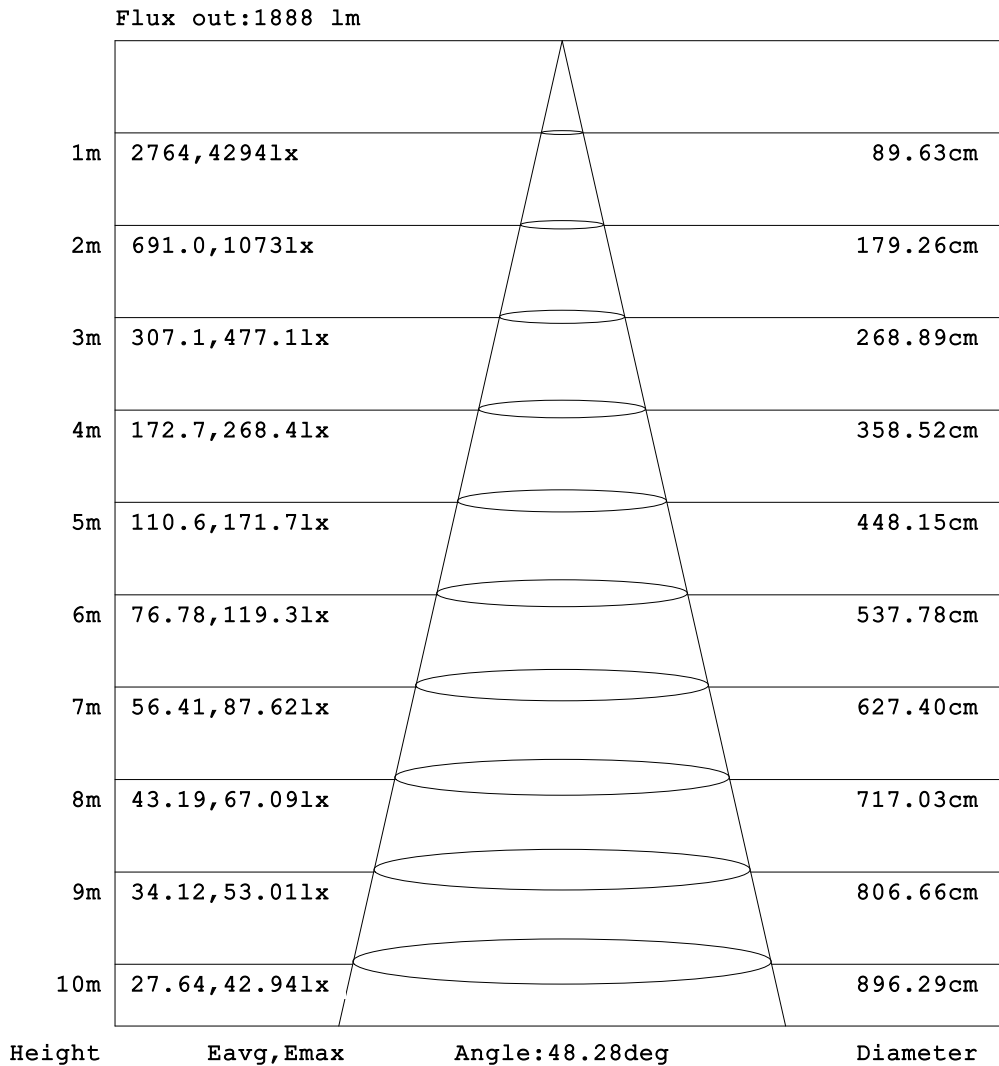


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test: U:220.50V I:0.1780A P:37.600W PF:0.9580 Freq:50.00Hz Lamp Flux:2538.4x1 lm		
Name: NS99-40W	Type: LED	
MFR.: Lumega		

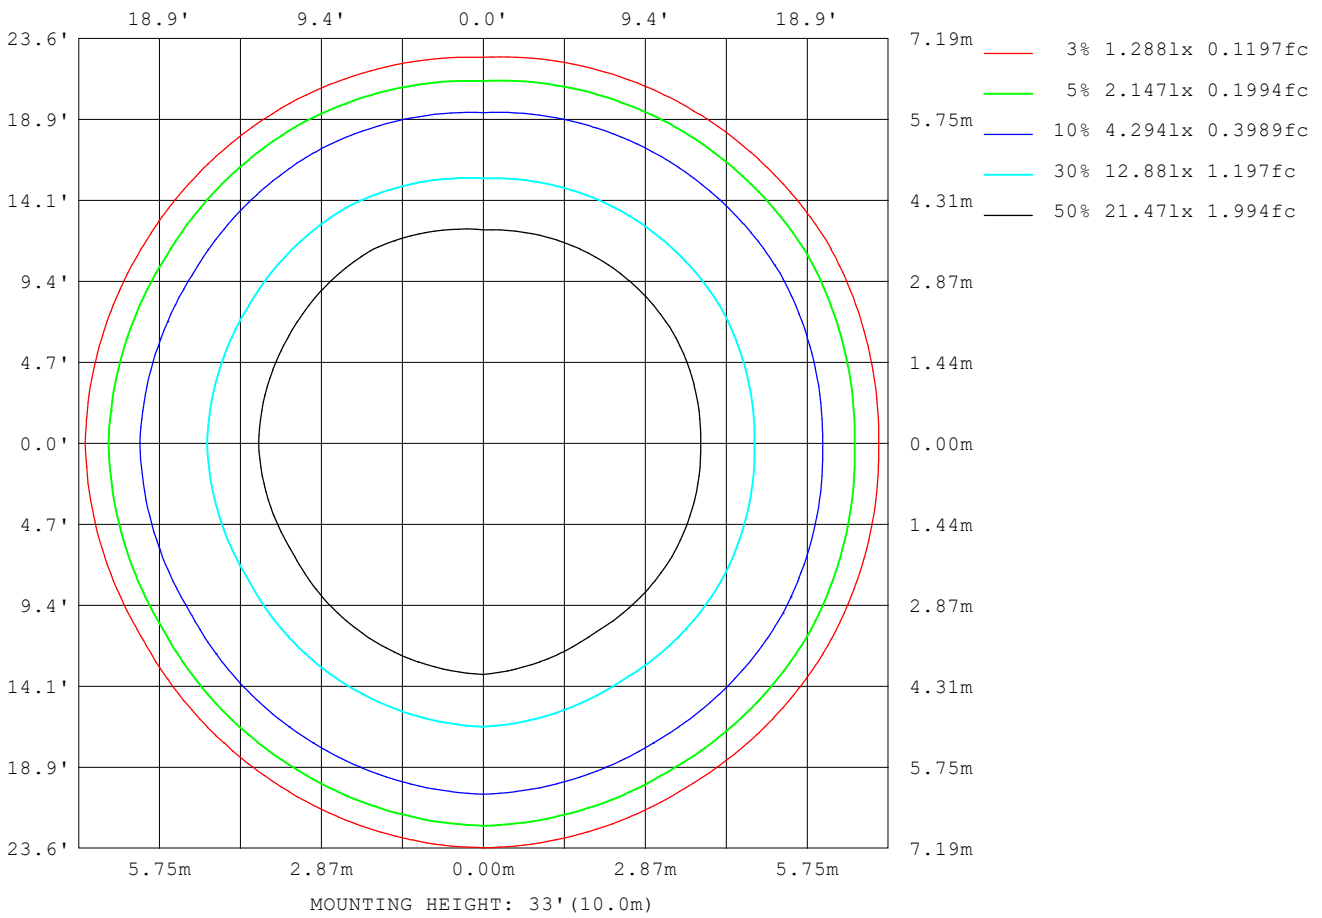

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

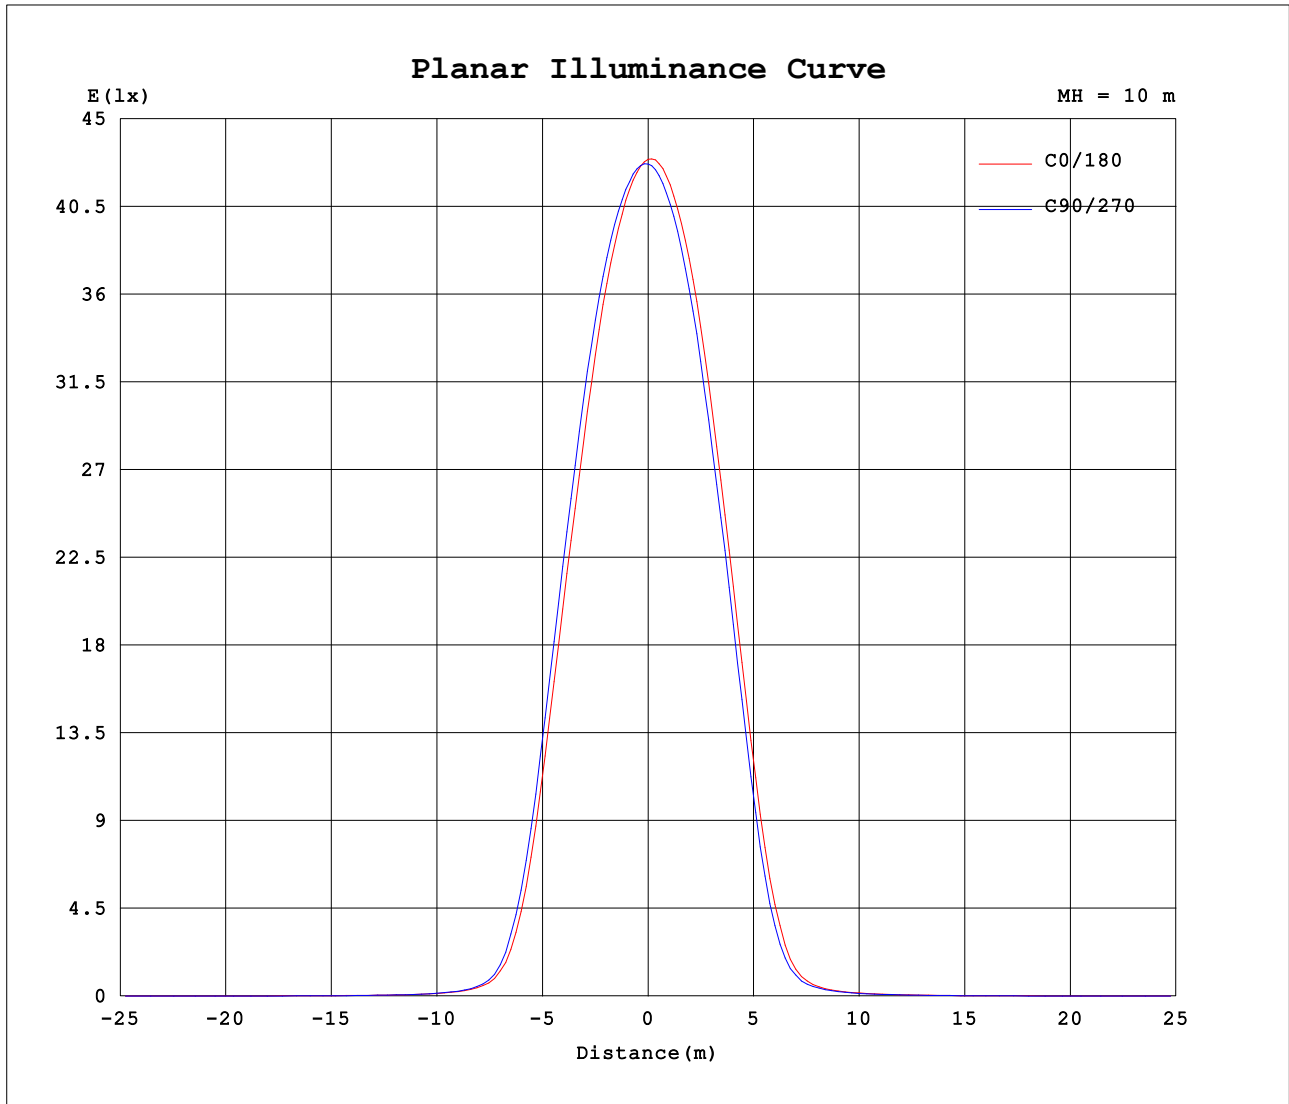

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.50V I:0.1780A P:37.600W PF:0.9580 Freq:50.00Hz		
Lamp Flux:2538.4x1 lm		
Name: NS99-40W	Type: LED	
MFR.: Lumega		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	4292	4286	4273	4268	4258	4239	4292	4286	4273	4268	4258	4239							
5	4186	4187	4183	4226	4206	4179	4254	4234	4223	4165	4167	4152							
10	3938	3946	3952	4058	4023	3966	4059	4029	4028	3908	3931	3930							
15	3489	3511	3517	3704	3644	3555	3659	3621	3635	3446	3493	3519							
20	2817	2848	2856	3076	2986	2867	2975	2938	2948	2755	2820	2864							
25	1915	1976	1984	2183	2063	1927	2034	1953	1955	1775	1888	1963							
30	865	947	944	1072	953	858	932	837	825	732	826	913							
35	239	260	256	294	251	224	251	229	214	198	224	249							
40	78.2	82.4	81.4	86.2	80.8	77.1	87.6	81.7	80.5	75.2	84.0	89.1							
45	41.3	42.4	41.9	42.1	40.0	39.4	48.0	44.0	43.0	41.4	45.3	47.1							
50	26.4	27.1	27.3	25.4	24.5	24.5	30.1	28.2	27.3	26.8	28.5	29.6							
55	17.8	18.4	18.8	16.4	15.9	16.2	19.8	19.2	18.1	18.0	18.6	19.6							
60	13.6	14.2	14.5	12.1	11.9	12.5	15.4	15.2	14.0	14.1	14.3	14.9							
65	10.2	10.6	10.9	9.17	8.99	9.31	12.5	12.5	11.6	11.3	11.3	11.9							
70	7.46	8.02	8.13	7.04	6.73	6.82	10.5	10.4	9.74	9.36	9.42	9.97							
75	4.38	4.89	5.02	4.57	4.22	4.16	7.89	7.75	7.51	7.34	7.44	7.69							
80	2.41	2.72	2.81	2.68	2.45	2.37	6.41	6.27	6.19	6.19	6.28	6.38							
85	1.17	1.29	1.34	1.32	1.21	1.11	5.58	5.48	5.47	5.52	5.58	5.61							
90	0.51	0.50	0.49	0.47	0.47	0.46	5.17	5.24	5.21	5.29	5.25	5.24							
95	0.91	0.86	0.86	0.80	0.85	0.84	5.88	5.96	5.96	6.03	5.97	5.90							
100	1.32	1.27	1.28	1.21	1.25	1.26	6.64	6.73	6.72	6.80	6.75	6.69							
105	1.70	1.65	1.65	1.58	1.63	1.62	7.23	7.27	7.26	7.32	7.31	7.28							
110	2.04	1.99	1.99	1.93	1.97	1.97	7.52	7.52	7.50	7.53	7.56	7.55							
115	2.32	2.28	2.28	2.24	2.27	2.26	7.56	7.56	7.53	7.51	7.56	7.60							
120	2.56	2.52	2.52	2.49	2.51	2.51	7.43	7.42	7.38	7.31	7.39	7.45							
125	2.73	2.70	2.69	2.69	2.71	2.70	7.18	7.14	7.09	6.98	7.07	7.12							
130	2.82	2.80	2.80	2.82	2.82	2.80	6.78	6.72	6.67	6.53	6.63	6.68							
135	2.84	2.81	2.82	2.84	2.85	2.80	6.24	6.16	6.13	5.94	6.08	6.12							
140	2.75	2.74	2.75	2.77	2.77	2.70	5.51	5.44	5.40	5.22	5.34	5.41							
145	2.59	2.59	2.59	2.63	2.60	2.56	4.67	4.60	4.53	4.38	4.49	4.58							
150	2.43	2.41	2.42	2.44	2.44	2.38	3.76	3.69	3.62	3.49	3.60	3.69							
155	2.31	2.29	2.31	2.32	2.32	2.28	2.94	2.86	2.83	2.74	2.81	2.86							
160	2.21	2.17	2.19	2.25	2.23	2.16	2.39	2.34	2.34	2.30	2.30	2.29							
165	2.04	2.02	2.03	2.09	2.06	2.02	2.10	2.07	2.07	2.02	2.01	1.99							
170	1.88	1.86	1.89	1.91	1.90	1.88	1.93	1.92	1.87	1.80	1.82	1.82							
175	1.83	1.81	1.82	1.80	1.82	1.80	1.85	1.86	1.82	1.71	1.79	1.75							
180	1.83	1.85	1.82	1.78	1.81	1.78	1.85	1.83	1.81	1.77	1.83	1.79							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: