
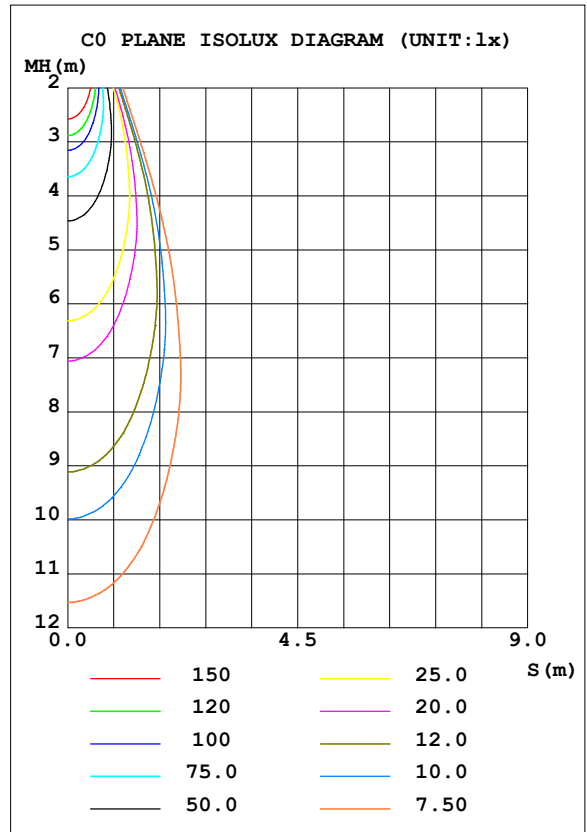


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.50V I:0.0550A P:6.7800W PF:0.5550 Freq:50.00Hz		
Lamp Flux:304.57x1 lm		
Name: NS99-6W	Type: LED	
MFR.: Lumega		

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	996.3	S/MH (C0/180)	0.51
NOMINAL POWER (W)	6	LOR (%)	100.0	S/MH (C90/270)	0.53
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	304.57	η UP, DN (C0-180)	0.4, 49.6
NOMINAL FLUX (lm)	304.57	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.4, 49.6
LAMPS INSIDE	1	η up (%)	0.8	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220	η down (%)	99.2	CIBSE SHR MAX	0.55

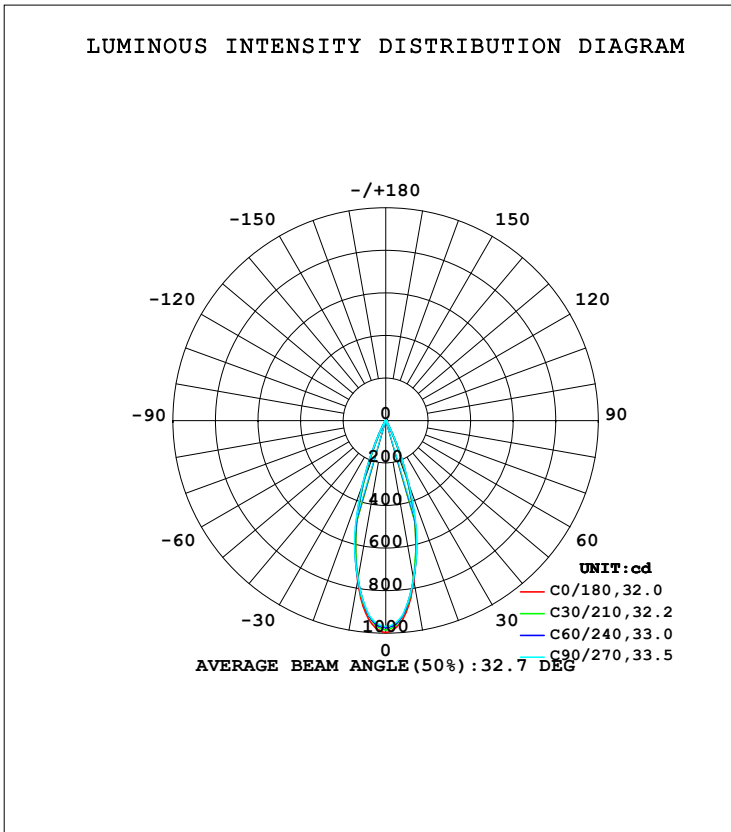

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	762.6	755.3	753.4	755.3	762.6	755.3	753.4	755.3	0- 10	82.63	82.63	27.1,27.1
20	299.3	306.0	323.2	306.0	299.3	306.0	323.2	306.0	10- 20	147.0	229.6	75.4,75.4
30	28.46	32.00	34.81	32.00	28.46	32.00	34.81	32.00	20- 30	58.15	287.8	94.5,94.5
40	5.412	5.702	6.012	5.702	5.412	5.702	6.012	5.702	30- 40	8.333	296.1	97.2,97.2
50	2.114	2.150	2.243	2.150	2.114	2.150	2.243	2.150	40- 50	2.722	298.8	98.1,98.1
60	1.167	1.156	1.196	1.156	1.167	1.156	1.196	1.156	50- 60	1.408	300.3	98.6,98.6
70	0.7413	0.7376	0.7091	0.7376	0.7413	0.7376	0.7091	0.7376	60- 70	0.9052	301.2	98.9,98.9
80	0.4576	0.4493	0.4168	0.4493	0.4576	0.4493	0.4168	0.4493	70- 80	0.6193	301.8	99.1,99.1
90	0.3000	0.2992	0.3124	0.2992	0.3000	0.2992	0.3124	0.2992	80- 90	0.3862	302.2	99.2,99.2
100	0.3299	0.3262	0.3141	0.3262	0.3299	0.3262	0.3141	0.3262	90-100	0.3293	302.5	99.3,99.3
110	0.4670	0.4615	0.4431	0.4615	0.4670	0.4615	0.4431	0.4615	100-110	0.4072	302.9	99.5,99.5
120	0.5764	0.5666	0.5460	0.5666	0.5764	0.5666	0.5460	0.5666	110-120	0.5164	303.4	99.6,99.6
130	0.5369	0.5265	0.5157	0.5265	0.5369	0.5265	0.5157	0.5265	120-130	0.5032	303.9	99.8,99.8
140	0.3524	0.3527	0.3712	0.3527	0.3524	0.3527	0.3712	0.3527	130-140	0.3472	304.3	99.9,99.9
150	0.2056	0.2083	0.2142	0.2083	0.2056	0.2083	0.2142	0.2083	140-150	0.1749	304.4	100,100
160	0.1549	0.1551	0.1697	0.1551	0.1549	0.1551	0.1697	0.1551	150-160	0.0832	304.5	100,100
170	0.0804	0.0825	0.0918	0.0825	0.0804	0.0825	0.0918	0.0825	160-170	0.0362	304.6	100,100
180	0.0357	0.0470	0.0664	0.0470	0.0357	0.0470	0.0664	0.0470	170-180	0.0060	304.6	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.50V I:0.0550A P:6.7800W PF:0.5550 Freq:50.00Hz		
Lamp Flux:304.57x1 lm		
Name: NS99-6W	Type: LED	
MFR.: Lumega		

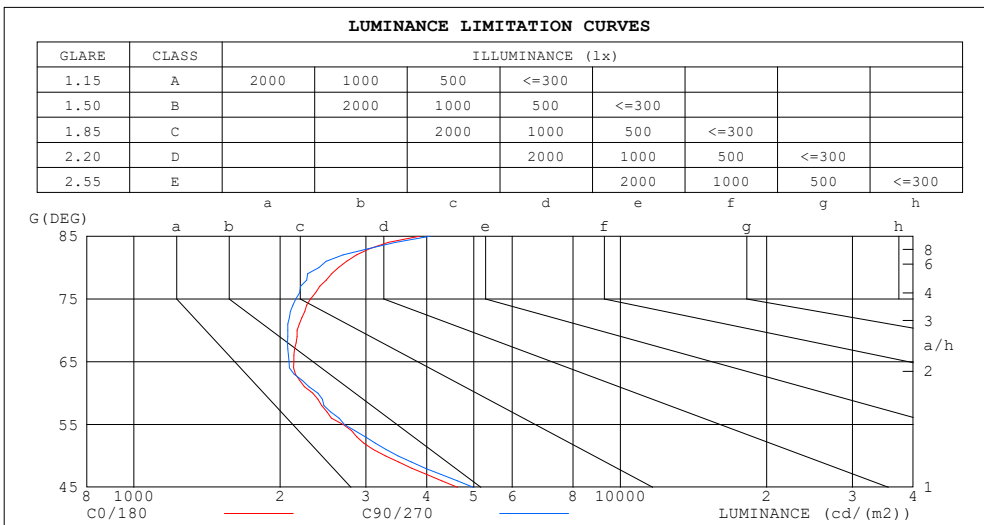

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3866	4060
80	2635	2400
75	2310	2152
70	2167	2073
65	2133	2086
60	2334	2392
55	2694	2709
50	3289	3490
45	4629	4983


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.50V I:0.0550A P:6.7800W PF:0.5550 Freq:50.00Hz		
Lamp Flux:304.57x1 lm		
Name: NS99-6W	Type: LED	
MFR.: Lumega		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.07	1.03	1.01	1.05	1.02	.00	1.02	.99	.97	.99	.97	.95	.96	.94	.93	.92
3.0	1.02	.98	.95	1.00	.97	.94	.98	.95	.92	.95	.93	.91	.93	.91	.89	.88
4.0	.97	.93	.90	.96	.92	.89	.94	.91	.88	.92	.89	.87	.90	.88	.86	.85
5.0	.93	.89	.86	.92	.88	.85	.91	.87	.85	.89	.86	.84	.88	.85	.83	.82
6.0	.90	.85	.82	.89	.85	.82	.88	.84	.81	.86	.83	.81	.85	.82	.80	.79
7.0	.87	.82	.79	.86	.82	.79	.85	.81	.78	.84	.80	.78	.82	.80	.77	.76
8.0	.84	.79	.76	.83	.79	.76	.82	.78	.76	.81	.78	.75	.80	.77	.75	.74
9.0	.81	.76	.73	.80	.76	.73	.79	.76	.73	.79	.75	.73	.78	.75	.73	.72
10.0	.78	.74	.71	.78	.74	.71	.77	.73	.71	.76	.73	.71	.76	.73	.70	.69

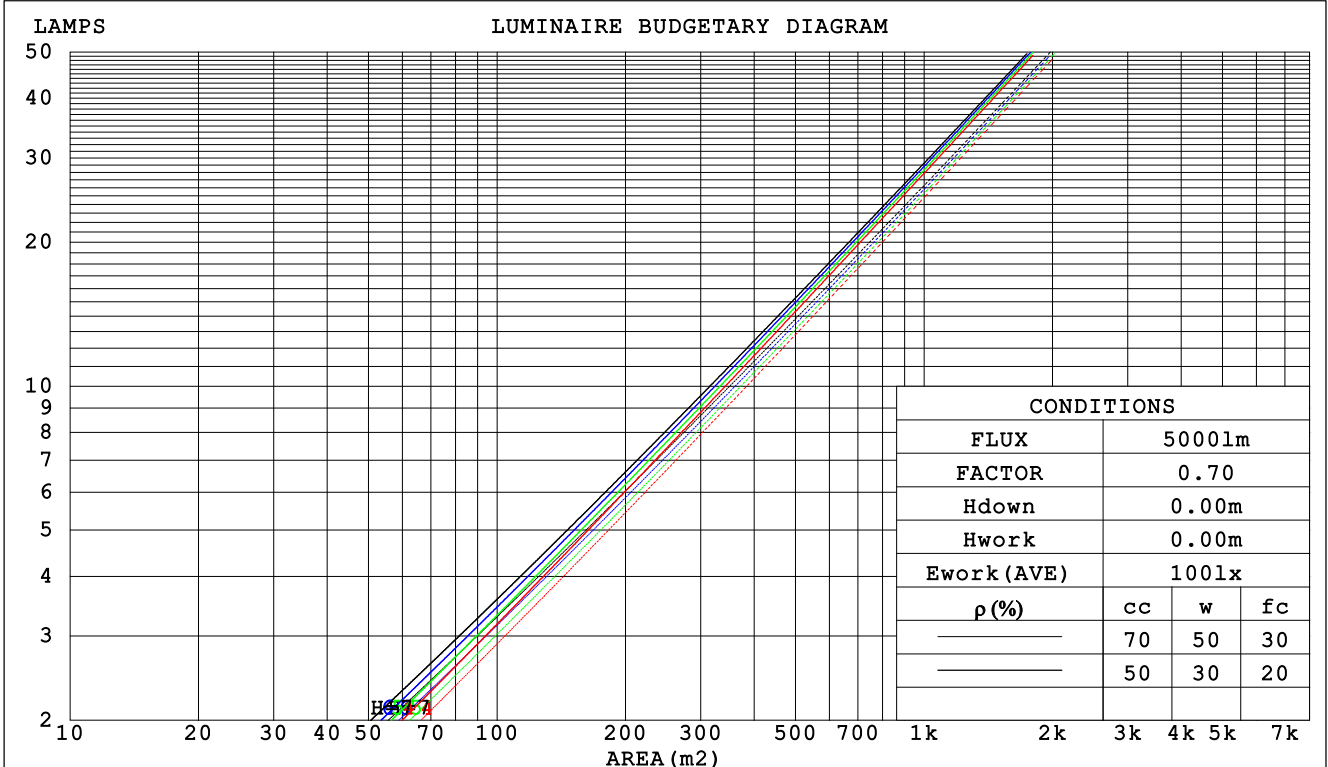

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.50V I:0.0550A P:6.7800W PF:0.5550 Freq:50.00Hz		
Lamp Flux:304.57x1 lm		
Name: NS99-6W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.146	.083	.026	.139	.079	.025	.126	.072	.023	.114	.066	.021	.103	.060	.019	
2.0	.135	.074	.023	.129	.071	.022	.119	.066	.021	.109	.061	.019	.100	.056	.018	
3.0	.126	.067	.020	.121	.065	.020	.112	.061	.019	.104	.057	.017	.096	.053	.016	
4.0	.118	.062	.018	.114	.060	.018	.107	.057	.017	.100	.053	.016	.093	.051	.015	
5.0	.112	.057	.016	.108	.056	.016	.102	.053	.016	.095	.050	.015	.090	.048	.014	
6.0	.106	.053	.015	.103	.052	.015	.097	.050	.014	.092	.048	.014	.087	.046	.014	
7.0	.101	.050	.014	.098	.049	.014	.093	.047	.014	.088	.045	.013	.084	.044	.013	
8.0	.096	.047	.013	.094	.046	.013	.089	.045	.013	.085	.043	.012	.081	.042	.012	
9.0	.092	.044	.012	.090	.044	.012	.086	.042	.012	.082	.041	.012	.079	.040	.012	
10.0	.088	.042	.012	.086	.042	.012	.083	.041	.011	.080	.039	.011	.076	.038	.011	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.175	.164	.153	.150	.140	.132	.102	.097	.091	.059	.056	.053	.019	.018	.017	
2.0	.157	.139	.123	.135	.119	.106	.092	.083	.074	.053	.048	.043	.017	.016	.014	
3.0	.143	.119	.101	.123	.103	.087	.084	.072	.061	.049	.042	.036	.016	.014	.012	
4.0	.131	.104	.084	.112	.090	.073	.077	.063	.051	.045	.037	.030	.014	.012	.010	
5.0	.121	.092	.071	.104	.080	.062	.071	.056	.044	.041	.033	.026	.013	.011	.009	
6.0	.112	.082	.061	.096	.071	.053	.066	.050	.038	.039	.029	.022	.012	.010	.007	
7.0	.105	.074	.053	.090	.064	.046	.062	.045	.033	.036	.027	.019	.012	.009	.006	
8.0	.098	.067	.046	.085	.059	.040	.059	.041	.029	.034	.024	.017	.011	.008	.006	
9.0	.093	.062	.041	.080	.054	.036	.055	.038	.025	.032	.022	.015	.010	.007	.005	
10.0	.088	.057	.037	.076	.050	.032	.053	.035	.023	.031	.021	.014	.010	.007	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.50V I:0.0550A P:6.7800W PF:0.5550 Freq:50.00Hz		
Lamp Flux:304.57x1 lm		
Name: NS99-6W	Type: LED	
MFR.: Lumega		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.1	7.8	7.3	7.9	8.1	7.6	8.3	7.8	8.4	8.6
3H	7.6	8.2	7.8	8.4	8.6	8.0	8.6	8.2	8.8	9.0
4H	7.9	8.5	8.2	8.8	9.0	8.2	8.9	8.5	9.1	9.3
6H	8.3	8.9	8.6	9.2	9.4	8.5	9.1	8.8	9.4	9.6
8H	8.6	9.1	8.9	9.4	9.6	8.7	9.3	9.0	9.5	9.8
12H	8.8	9.3	9.1	9.6	9.9	9.0	9.5	9.3	9.8	10.1
4H 2H	7.2	7.8	7.4	8.0	8.2	7.6	8.2	7.9	8.5	8.7
3H	7.9	8.4	8.2	8.7	9.0	8.2	8.7	8.5	9.0	9.3
4H	8.4	8.9	8.7	9.2	9.5	8.6	9.1	9.0	9.4	9.7
6H	9.0	9.4	9.4	9.8	10.1	9.1	9.5	9.5	9.9	10.2
8H	9.3	9.7	9.7	10.1	10.4	9.4	9.8	9.8	10.1	10.5
12H	9.7	10.0	10.1	10.4	10.8	9.7	10.1	10.2	10.5	10.9
8H 4H	8.6	9.0	9.0	9.3	9.7	8.8	9.2	9.2	9.5	9.9
6H	9.3	9.7	9.8	10.1	10.5	9.4	9.8	9.9	10.2	10.6
8H	9.8	10.1	10.2	10.5	11.0	9.8	10.1	10.3	10.6	11.0
12H	10.3	10.6	10.8	11.0	11.5	10.4	10.7	10.9	11.1	11.6
12H 4H	8.6	8.9	9.0	9.3	9.7	8.8	9.2	9.2	9.5	9.9
6H	9.4	9.7	9.9	10.1	10.6	9.5	9.8	10.0	10.2	10.7
8H	9.9	10.2	10.4	10.6	11.1	10.0	10.2	10.4	10.7	11.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.7 / - 0.7					+ 0.9 / - 0.9				
1.5H	+ 1.4 / - 0.6					+ 1.8 / - 0.7				
2.0H	+ 0.8 / - 0.4					+ 1.0 / - 0.4				

CIE Pub.117, 304.6 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -4.1)
 Area: 0.001 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.50V I:0.0550A P:6.7800W PF:0.5550 Freq:50.00Hz		
Lamp Flux:304.57x1 lm		
Name: NS99-6W	Type: LED	
MFR.: Lumega		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	90	84	81	89	84	80	89	83	80	77
0.80	97	91	88	96	91	88	95	91	88	84
1.00	101	96	92	100	95	92	98	95	91	88
1.25	104	100	96	103	99	96	101	98	95	91
1.50	107	102	99	106	102	99	103	100	98	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.50V I:0.0550A P:6.7800W PF:0.5550 Freq:50.00Hz		
Lamp Flux:304.57x1 lm		
Name: NS99-6W	Type: LED	
MFR.: Lumega		

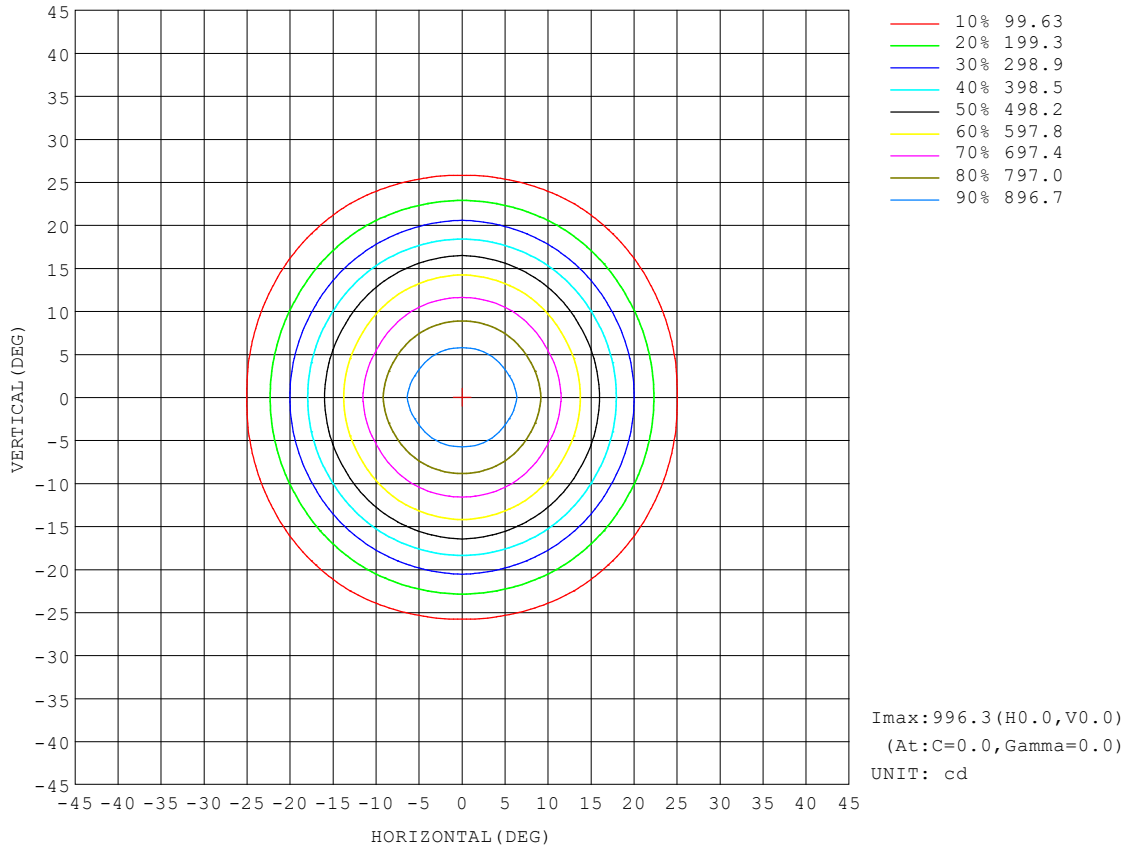


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

AAI Figure

Test:U:220.50V I:0.0550A P:6.7800W PF:0.5550 Freq:50.00Hz		
Lamp Flux:304.57x1 lm		
Name: NS99-6W	Type: LED	
MFR.: Lumega		

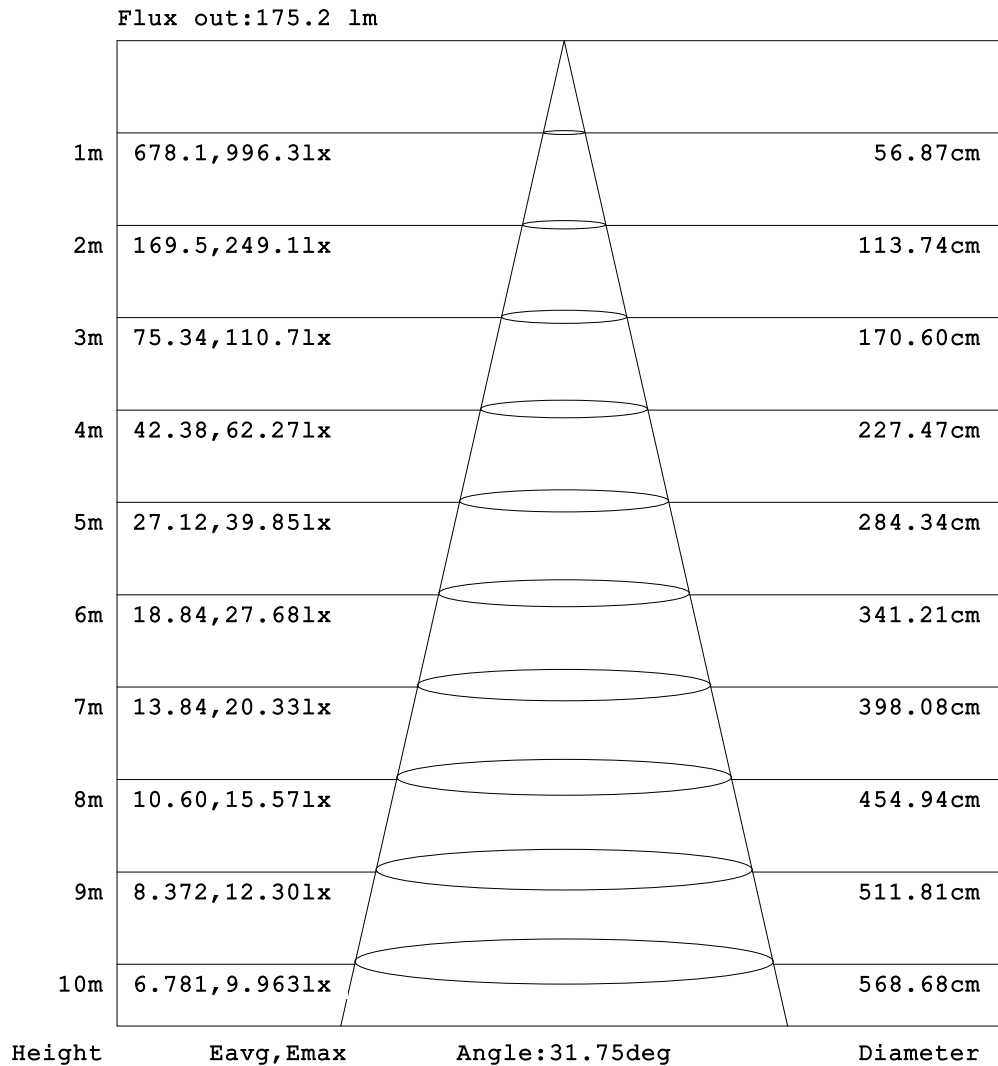


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test: U:220.50V I:0.0550A P:6.7800W PF:0.5550 Freq:50.00Hz Lamp Flux:304.57x1 lm		
Name: NS99-6W	Type: LED	
MFR.: Lumega		

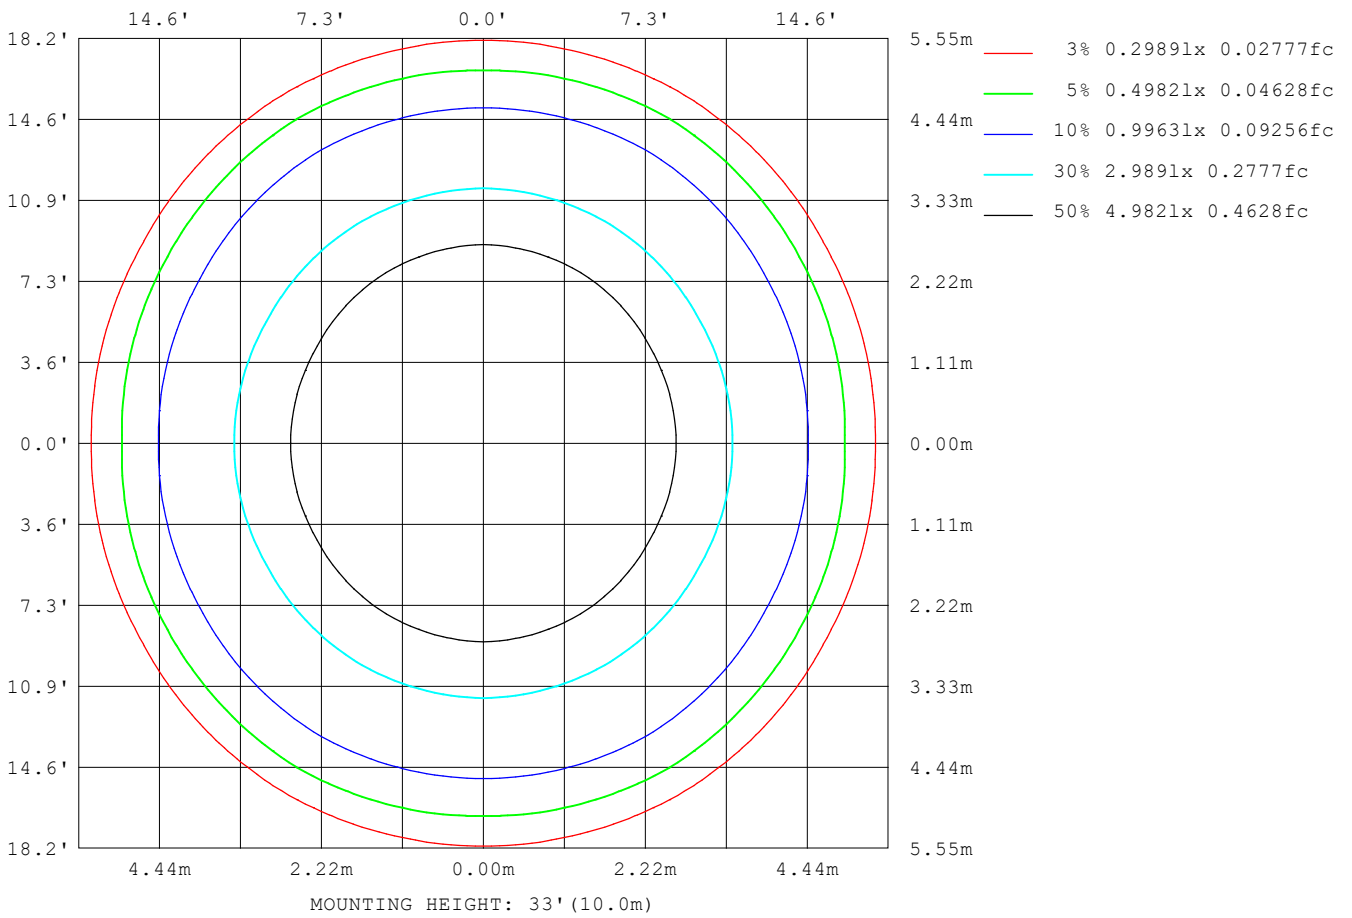

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

Planar Illuminance Curve

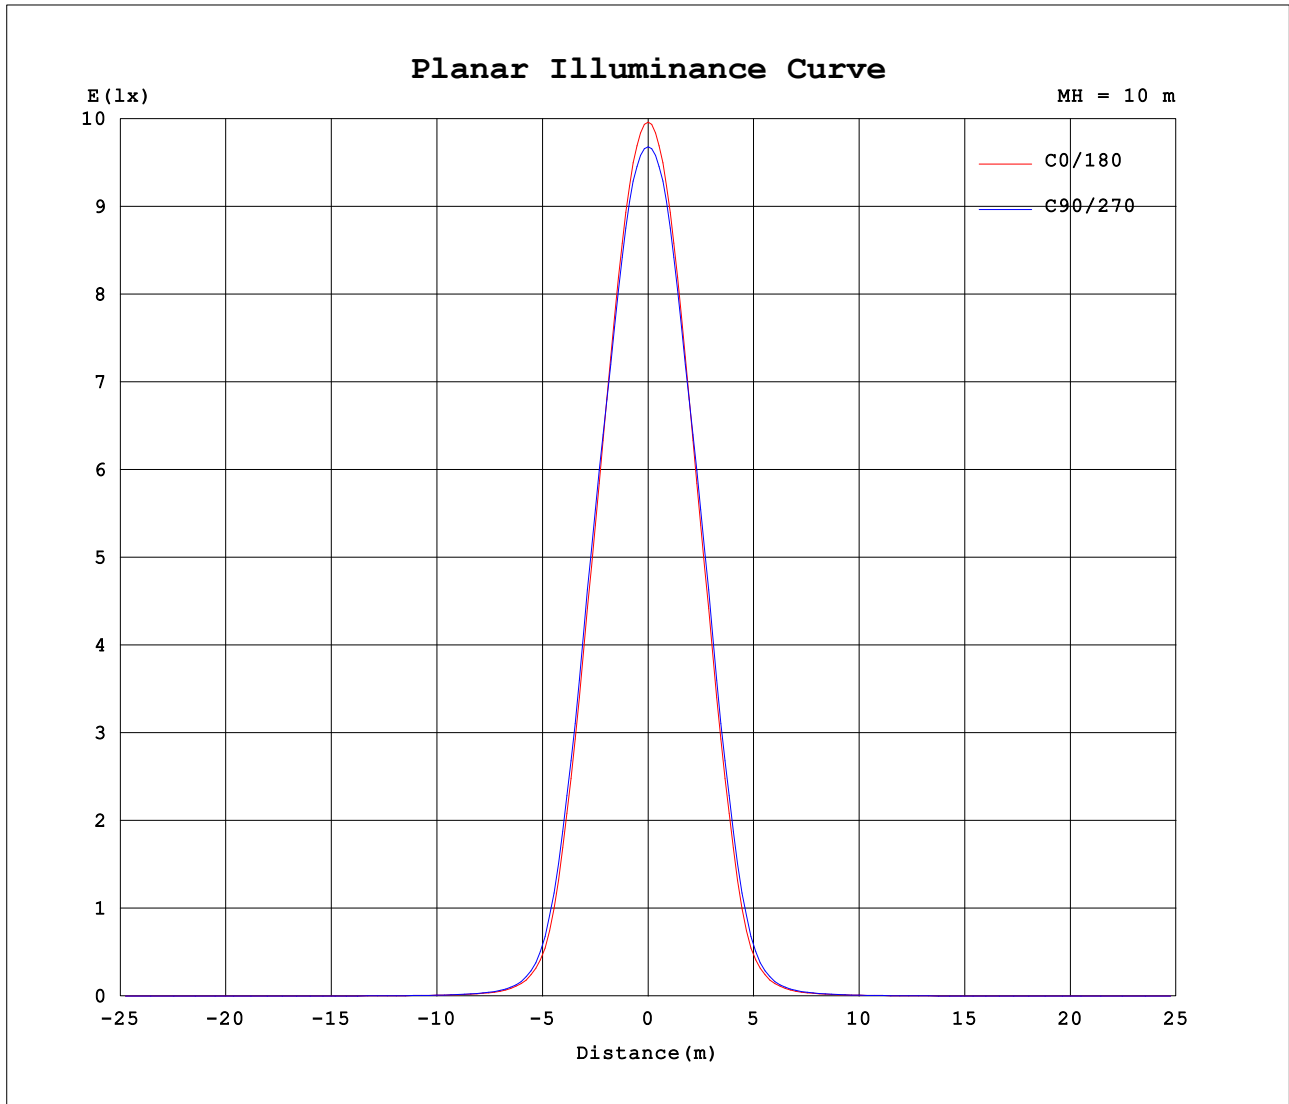

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.50V I:0.0550A P:6.7800W PF:0.5550 Freq:50.00Hz		
Lamp Flux:304.57x1 lm		
Name: NS99-6W	Type: LED	
MFR.: Lumega		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	996	984	973	968	973	984	996	984	973	968	973	984							
5	935	921	920	917	920	921	935	921	920	917	920	921							
10	763	753	757	753	757	753	763	753	757	753	757	753							
15	543	542	557	565	557	542	543	542	557	565	557	542							
20	299	299	313	323	313	299	299	299	313	323	313	299							
25	100	108	123	124	123	108	100	108	123	124	123	108							
30	28.5	30.3	33.7	34.8	33.7	30.3	28.5	30.3	33.7	34.8	33.7	30.3							
35	10.5	10.9	12.0	12.0	12.0	10.9	10.5	10.9	12.0	12.0	12.0	10.9							
40	5.41	5.54	5.87	6.01	5.87	5.54	5.41	5.54	5.87	6.01	5.87	5.54							
45	3.27	3.26	3.46	3.52	3.46	3.26	3.27	3.26	3.46	3.52	3.46	3.26							
50	2.11	2.10	2.20	2.24	2.20	2.10	2.11	2.10	2.20	2.24	2.20	2.10							
55	1.55	1.52	1.56	1.55	1.56	1.52	1.55	1.52	1.56	1.55	1.56	1.52							
60	1.17	1.16	1.15	1.20	1.15	1.16	1.17	1.16	1.15	1.20	1.15	1.16							
65	0.90	0.90	0.90	0.88	0.90	0.90	0.90	0.90	0.90	0.88	0.90	0.90							
70	0.74	0.74	0.73	0.71	0.73	0.74	0.74	0.74	0.73	0.71	0.73	0.74							
75	0.60	0.59	0.58	0.56	0.58	0.59	0.60	0.59	0.58	0.56	0.58	0.59							
80	0.46	0.45	0.44	0.42	0.44	0.45	0.46	0.45	0.44	0.42	0.44	0.45							
85	0.34	0.34	0.35	0.35	0.35	0.34	0.34	0.34	0.35	0.35	0.35	0.34							
90	0.30	0.30	0.30	0.31	0.30	0.30	0.30	0.30	0.30	0.31	0.30	0.30							
95	0.30	0.29	0.30	0.30	0.30	0.29	0.30	0.29	0.30	0.30	0.30	0.29							
100	0.33	0.32	0.33	0.31	0.33	0.32	0.33	0.32	0.33	0.31	0.33	0.32							
105	0.39	0.38	0.38	0.37	0.38	0.38	0.39	0.38	0.38	0.37	0.38	0.38							
110	0.47	0.46	0.46	0.44	0.46	0.46	0.47	0.46	0.46	0.44	0.46	0.46							
115	0.54	0.53	0.52	0.50	0.52	0.53	0.54	0.53	0.52	0.50	0.52	0.53							
120	0.58	0.57	0.57	0.55	0.57	0.57	0.58	0.57	0.57	0.55	0.57	0.57							
125	0.58	0.57	0.57	0.55	0.57	0.57	0.58	0.57	0.57	0.55	0.57	0.57							
130	0.54	0.52	0.53	0.52	0.53	0.52	0.54	0.52	0.53	0.52	0.53	0.52							
135	0.46	0.43	0.46	0.45	0.46	0.43	0.46	0.43	0.46	0.45	0.46	0.43							
140	0.35	0.34	0.37	0.37	0.37	0.34	0.35	0.34	0.37	0.37	0.37	0.34							
145	0.26	0.26	0.28	0.29	0.28	0.26	0.26	0.26	0.28	0.29	0.28	0.26							
150	0.21	0.20	0.22	0.21	0.22	0.20	0.21	0.20	0.22	0.21	0.22	0.20							
155	0.17	0.17	0.18	0.17	0.18	0.17	0.17	0.17	0.18	0.17	0.18	0.17							
160	0.15	0.15	0.16	0.17	0.16	0.15	0.15	0.15	0.16	0.17	0.16	0.15							
165	0.12	0.12	0.13	0.14	0.13	0.12	0.12	0.12	0.13	0.14	0.13	0.12							
170	0.08	0.08	0.09	0.09	0.09	0.08	0.08	0.08	0.09	0.09	0.09	0.08							
175	0.05	0.05	0.06	0.06	0.06	0.05	0.05	0.05	0.06	0.06	0.06	0.05							
180	0.04	0.04	0.05	0.07	0.05	0.04	0.04	0.04	0.05	0.07	0.05	0.04							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: