
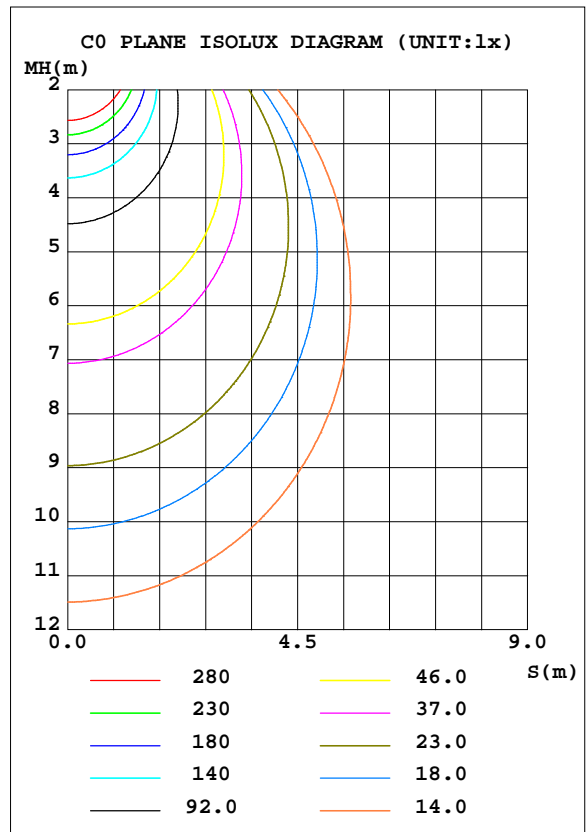


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.80V I:0.1890A P:40.400W PF:0.9590 Freq:50.00Hz		
Lamp Flux:5479.6lx1 lm		
Name: NS60-2951195-40W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 135.63 lm/W			
MODEL		I _{max} (cd)	1848	S/MH(C0/180)	1.25
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	5479.6	η UP, DN(C0-180)	1.1,47.1
NOMINAL FLUX(lm)	5479.61	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.2,50.7
LAMPS INSIDE	1	η up(%)	2.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.7	CIBSE SHR MAX	1.35

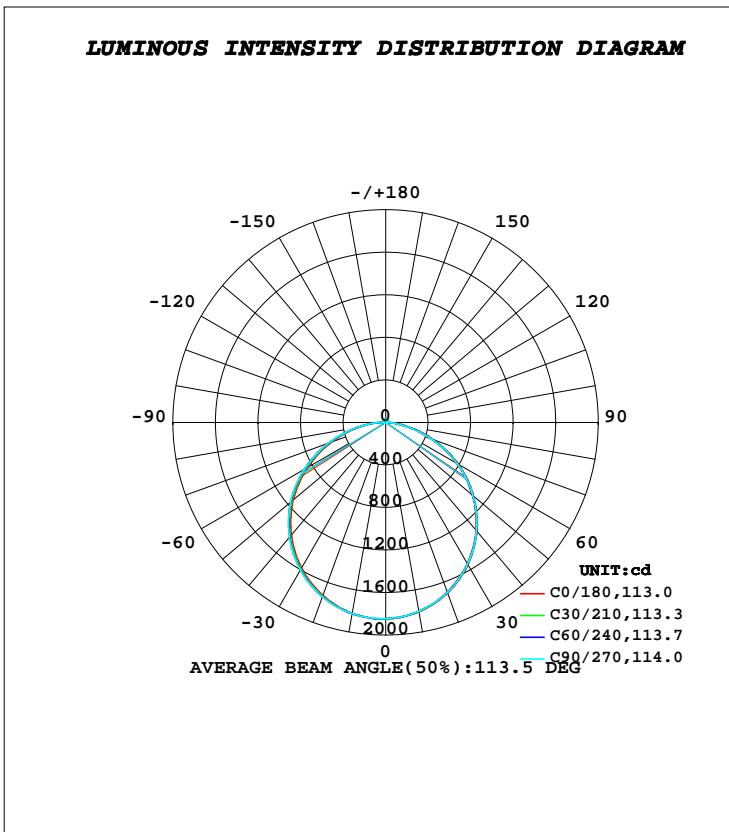

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1809	1803	1802	1811	1821	1825	1825	1819	0- 10	174.7	174.7	3.19,3.19
20	1706	1698	1698	1713	1730	1742	1745	1731	10- 20	501.0	675.8	12.3,12.3
30	1546	1537	1539	1559	1581	1598	1603	1583	20- 30	761.2	1437	26.2,26.2
40	1335	1325	1328	1352	1380	1401	1409	1383	30- 40	921.2	2358	43,43
50	1082	1068	1071	1102	1137	1161	1168	1138	40- 50	960.3	3319	60.6,60.6
60	792.1	774.4	776.2	809.3	848.4	876.6	886.3	853.9	50- 60	871.7	4190	76.5,76.5
70	485.0	460.3	459.5	496.9	541.2	569.0	577.4	545.5	60- 70	666.5	4857	88.6,88.6
80	194.9	168.7	166.3	202.5	244.6	264.8	268.1	242.3	70- 80	384.3	5241	95.6,95.6
90	9.476	8.448	10.04	15.33	22.37	32.83	38.69	29.14	80- 90	114.0	5355	97.7,97.7
100	12.50	12.32	12.62	13.76	14.91	15.32	15.17	14.16	90-100	14.66	5370	98,98
110	15.54	14.93	15.03	16.37	17.71	17.70	17.21	16.51	100-110	15.99	5386	98.3,98.3
120	18.45	17.59	17.56	18.99	20.42	20.11	19.37	18.90	110-120	17.47	5403	98.6,98.6
130	21.35	20.39	20.29	21.72	23.11	22.64	21.80	21.48	120-130	18.14	5421	98.9,98.9
140	23.80	23.26	23.28	24.32	25.34	25.10	24.55	24.17	130-140	17.71	5439	99.3,99.3
150	26.44	26.07	26.09	26.80	27.50	27.43	27.13	26.82	140-150	15.99	5455	99.6,99.6
160	29.34	28.96	28.88	29.33	29.80	29.76	29.58	29.47	150-160	12.96	5468	99.8,99.8
170	32.31	31.53	31.17	31.53	31.94	31.59	31.27	31.60	160-170	8.626	5477	99.9,99.9
180	32.83	32.23	31.99	32.42	32.84	32.42	32.00	32.23	170-180	3.053	5480	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.80V I:0.1890A P:40.400W PF:0.9590 Freq:50.00Hz		
Lamp Flux:5479.61x1 lm		
Name: NS60-2951195-40W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

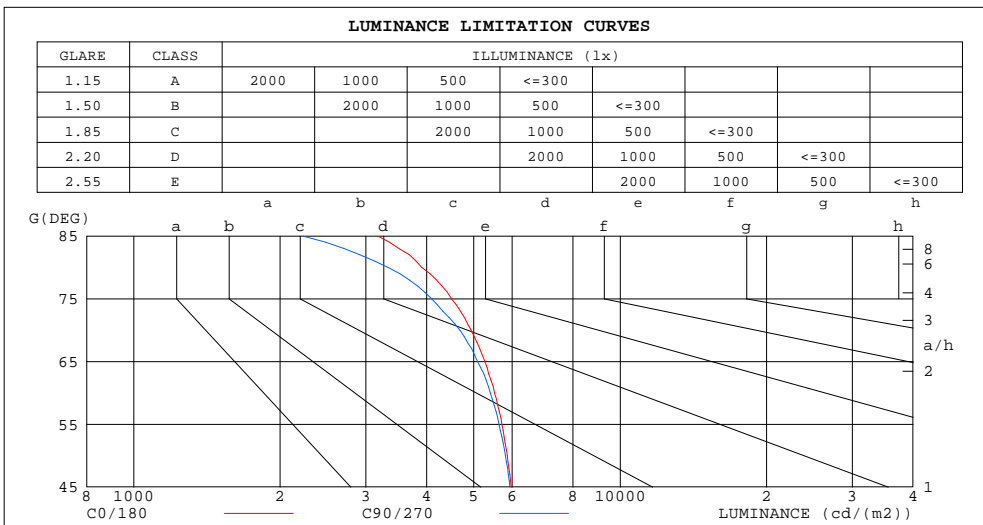


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.80V I:0.1890A P:40.400W PF:0.9590 Freq:50.00Hz		
Lamp Flux:5479.61lx1 lm		
Name: NS60-2951195-40W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.81
2.0	.90	.83	.77	.88	.81	.76	.84	.78	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.65	.60	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.53	.65	.58	.52	.63	.57	.52	.60	.55	.51	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.45	.54	.48	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.36
7.0	.51	.42	.36	.50	.41	.35	.48	.40	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.36	.31	.42	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

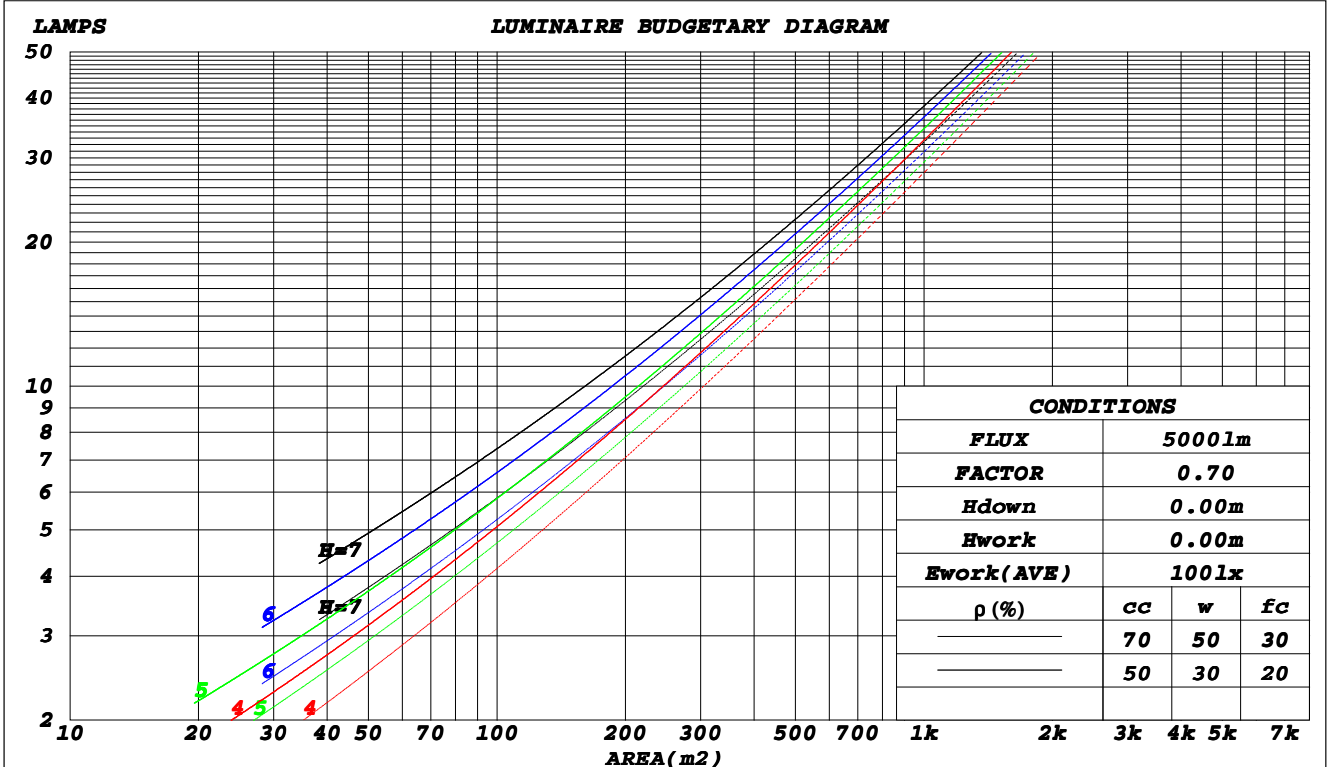

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.80V I:0.1890A P:40.400W PF:0.9590 Freq:50.00Hz		
Lamp Flux:5479.61x1 lm		
Name: NS60-2951195-40W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.313	.178	.056	.305	.174	.055	.290	.166	.053	.277	.160	.051	.264	.153	.049	
2.0	.293	.161	.049	.286	.158	.049	.273	.152	.047	.261	.147	.046	.250	.142	.045	
3.0	.271	.144	.043	.265	.142	.043	.253	.137	.042	.243	.133	.041	.233	.129	.040	
4.0	.250	.130	.038	.244	.128	.038	.234	.124	.037	.225	.121	.036	.216	.117	.036	
5.0	.231	.118	.034	.226	.116	.034	.217	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.214	.107	.031	.209	.106	.030	.201	.103	.030	.194	.101	.030	.187	.098	.029	
7.0	.199	.098	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.174	.091	.027	
8.0	.186	.091	.026	.182	.090	.025	.176	.088	.025	.169	.086	.025	.164	.084	.024	
9.0	.174	.084	.023	.171	.083	.023	.165	.082	.023	.159	.080	.023	.154	.078	.023	
10.0	.164	.078	.022	.161	.078	.022	.155	.076	.021	.150	.075	.021	.145	.073	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.178	.178	.178	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.198	.174	.152	.169	.149	.130	.116	.102	.090	.067	.059	.052	.021	.019	.017	
2.0	.190	.149	.115	.163	.129	.100	.112	.089	.070	.064	.052	.041	.021	.017	.013	
3.0	.182	.132	.092	.156	.114	.080	.107	.079	.056	.062	.046	.033	.020	.015	.011	
4.0	.175	.119	.076	.150	.103	.066	.103	.072	.046	.060	.042	.028	.019	.014	.009	
5.0	.167	.108	.065	.144	.094	.056	.099	.066	.040	.057	.038	.024	.018	.013	.008	
6.0	.160	.100	.057	.138	.087	.050	.095	.061	.035	.055	.036	.021	.018	.012	.007	
7.0	.153	.093	.051	.132	.081	.045	.091	.057	.032	.053	.033	.019	.017	.011	.006	
8.0	.147	.087	.047	.126	.076	.041	.087	.053	.029	.051	.031	.017	.016	.010	.006	
9.0	.141	.083	.043	.121	.072	.038	.084	.050	.027	.049	.030	.016	.016	.010	.005	
10.0	.135	.078	.040	.116	.068	.035	.081	.048	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.80V I:0.1890A P:40.400W PF:0.9590 Freq:50.00Hz		
Lamp Flux:5479.6lx1 lm		
Name: NS60-2951195-40W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.6	20.1	18.9	20.4	20.6	18.6	20.1	18.9	20.3	20.5
3H	20.1	21.5	20.4	21.7	22.0	19.9	21.3	20.3	21.6	21.9
4H	20.6	21.9	21.0	22.2	22.5	20.4	21.7	20.8	22.0	22.3
6H	21.0	22.2	21.4	22.6	22.9	20.7	22.0	21.1	22.3	22.6
8H	21.1	22.3	21.5	22.6	23.0	20.8	22.0	21.2	22.3	22.7
12H	21.2	22.3	21.6	22.7	23.0	20.8	22.0	21.2	22.3	22.7
4H 2H	19.2	20.5	19.5	20.8	21.1	19.1	20.4	19.5	20.7	21.0
3H	20.8	21.9	21.2	22.3	22.6	20.7	21.8	21.1	22.2	22.5
4H	21.5	22.5	21.9	22.9	23.2	21.3	22.3	21.7	22.7	23.1
6H	21.9	22.9	22.4	23.3	23.7	21.7	22.6	22.1	23.0	23.4
8H	22.1	23.0	22.5	23.4	23.8	21.8	22.6	22.2	23.1	23.5
12H	22.2	23.0	22.7	23.4	23.9	21.8	22.6	22.3	23.0	23.5
8H 4H	21.6	22.5	22.1	22.9	23.4	21.5	22.3	21.9	22.8	23.2
6H	22.3	23.0	22.7	23.4	23.9	22.0	22.7	22.5	23.2	23.6
8H	22.5	23.1	23.0	23.6	24.1	22.2	22.8	22.7	23.3	23.8
12H	22.6	23.2	23.1	23.7	24.2	22.3	22.8	22.8	23.3	23.8
12H 4H	21.6	22.4	22.1	22.9	23.3	21.5	22.3	21.9	22.7	23.2
6H	22.3	22.9	22.8	23.4	23.9	22.0	22.7	22.5	23.1	23.6
8H	22.5	23.1	23.0	23.6	24.1	22.2	22.8	22.7	23.3	23.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 5480 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.9)
 Area: 0.287 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.80V I:0.1890A P:40.400W PF:0.9590 Freq:50.00Hz Lamp Flux:5479.61x1 l m		
Name: NS60-2951195-40W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	54	44	38	31
0.80	67	55	47	65	54	47	63	53	47	40
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	71	64	80	71	64	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	81	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	89	99	93	87	95	89	85	76
4.00	105	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.80V I:0.1890A P:40.400W PF:0.9590 Freq:50.00Hz		
Lamp Flux:5479.6lx1 lm		
Name: NS60-2951195-40W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

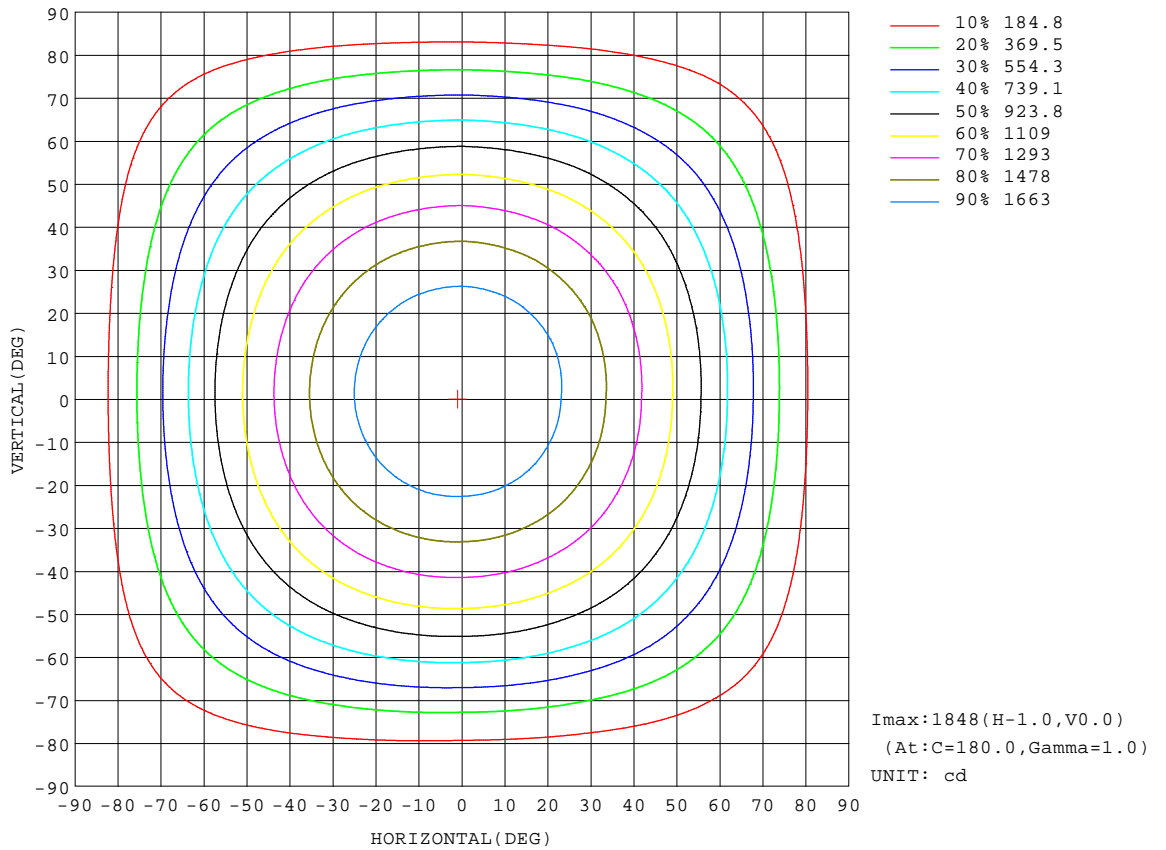


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.80V I:0.1890A P:40.400W PF:0.9590 Freq:50.00Hz		
Lamp Flux:5479.6lx1 lm		
Name: NS60-2951195-40W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

Flux out:3945 lm

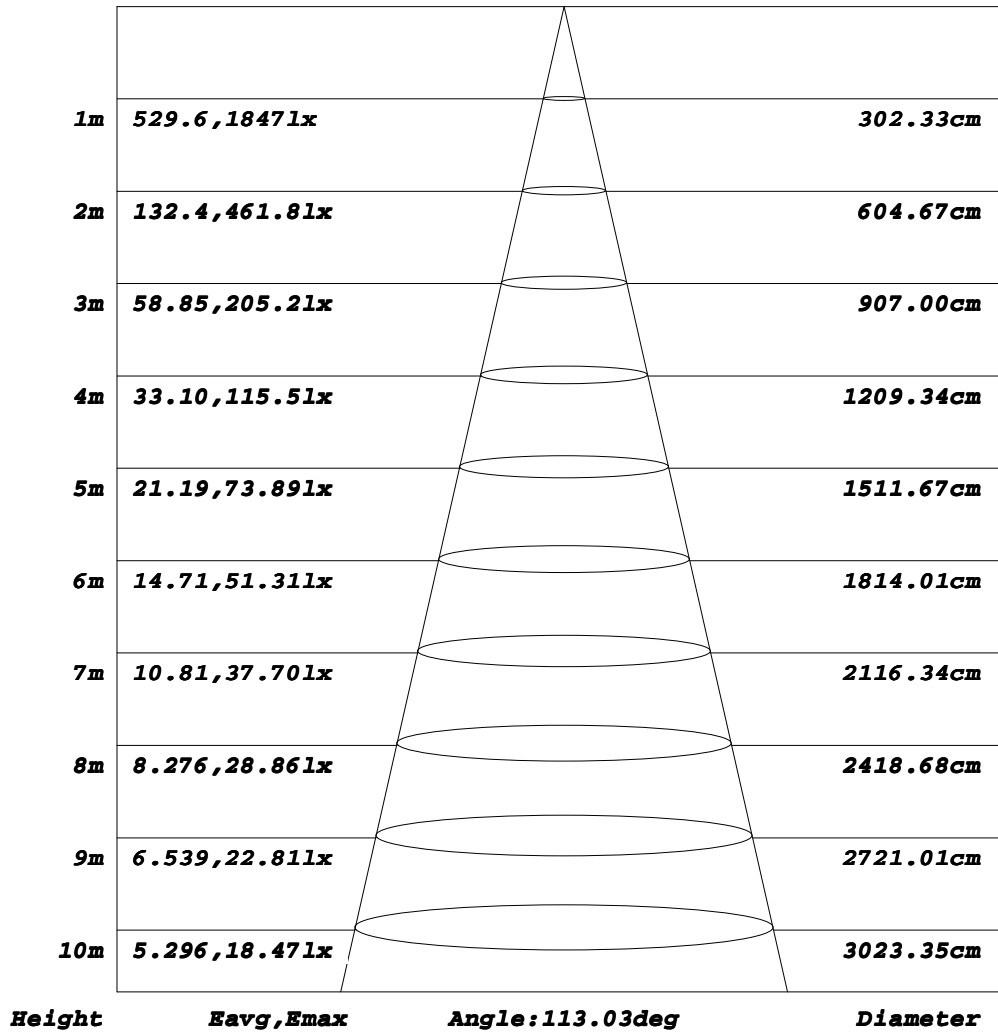


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.80V I:0.1890A P:40.400W PF:0.9590 Freq:50.00Hz		
Lamp Flux:5479.61x1 lm		
Name: NS60-2951195-40W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

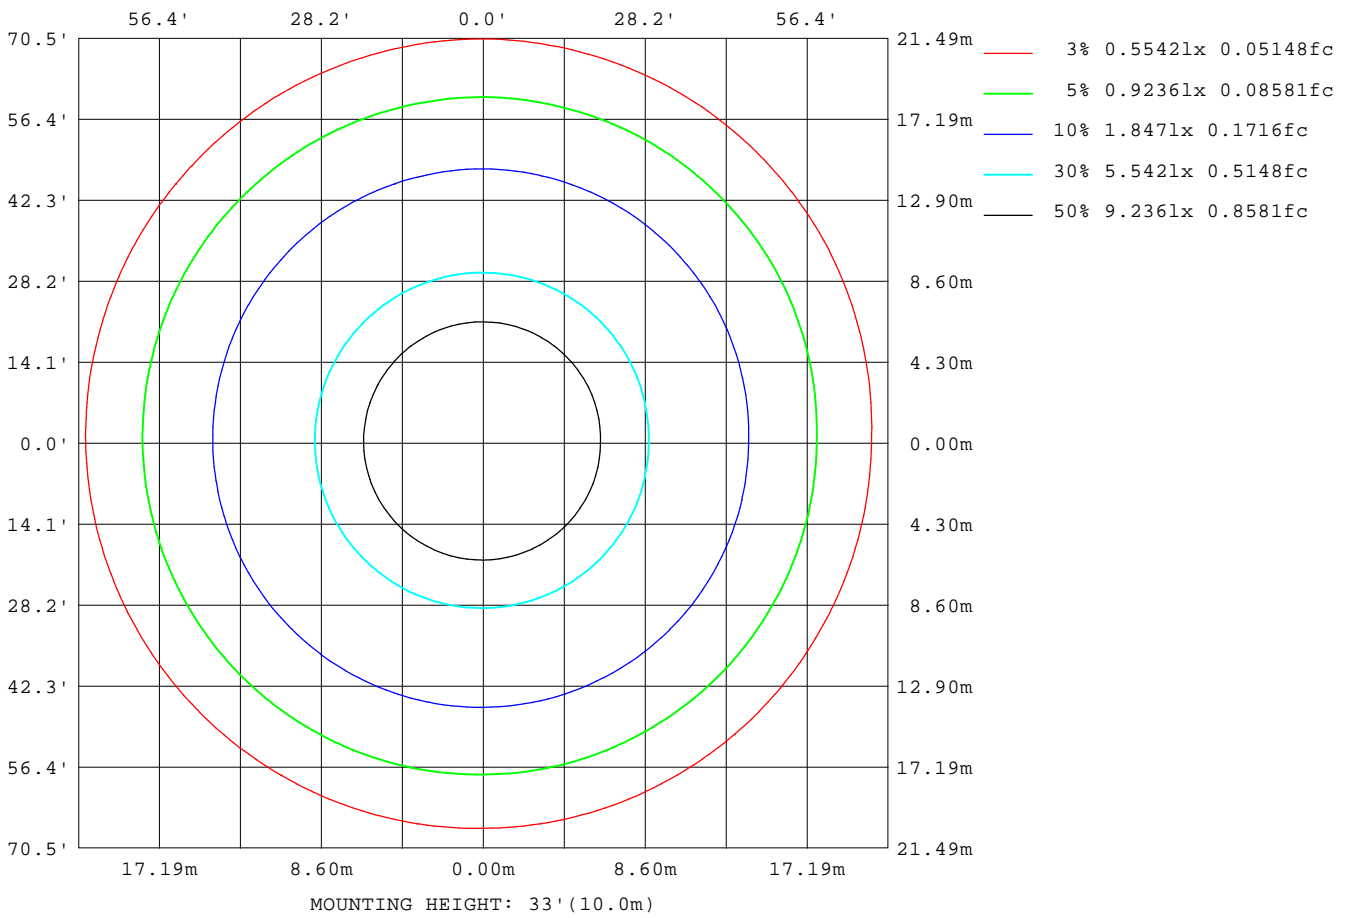

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

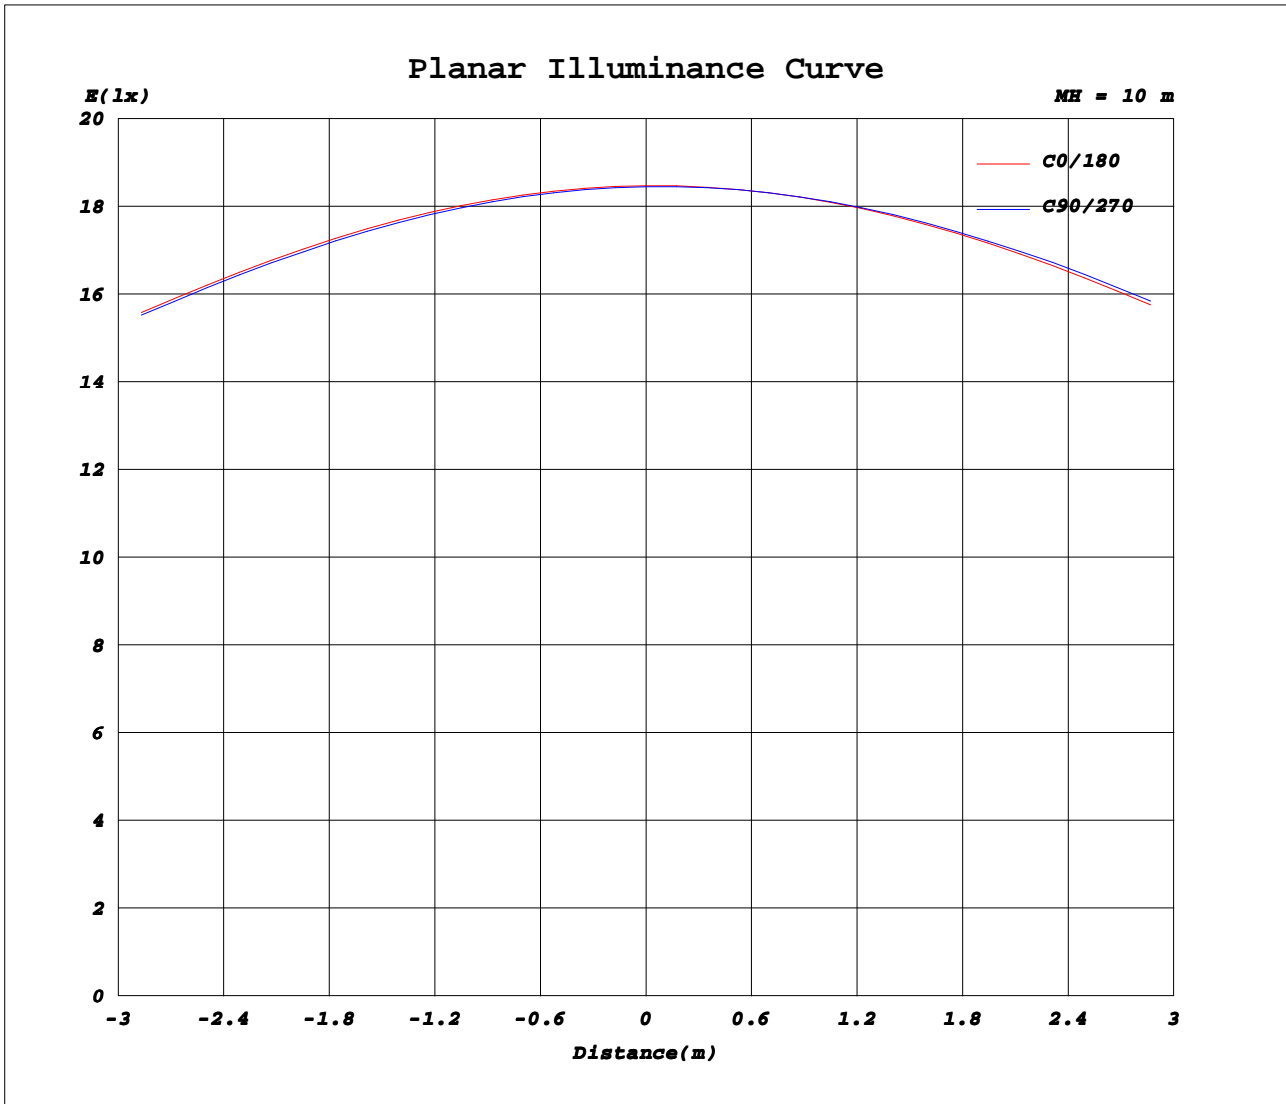

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.80V I:0.1890A P:40.400W PF:0.9590 Freq:50.00Hz		
Lamp Flux:5479.61x1 lm		
Name: NS60-2951195-40W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1847	1846	1845	1845	1846	1847	1847	1847	1846	1845	1845	1846							
5	1836	1833	1831	1832	1835	1839	1842	1843	1844	1843	1842	1839							
10	1809	1804	1802	1802	1808	1814	1821	1824	1826	1825	1822	1816							
15	1765	1759	1756	1758	1765	1774	1783	1789	1792	1792	1787	1778							
20	1706	1699	1696	1698	1707	1719	1730	1739	1744	1745	1738	1725							
25	1633	1625	1623	1625	1636	1649	1663	1673	1680	1681	1672	1656							
30	1546	1538	1536	1539	1551	1566	1581	1594	1602	1603	1593	1574							
35	1446	1438	1436	1440	1454	1470	1487	1501	1510	1512	1500	1478							
40	1335	1327	1324	1328	1343	1361	1380	1396	1407	1409	1396	1371							
45	1211	1202	1200	1205	1221	1241	1261	1279	1291	1293	1279	1251							
50	1082	1070	1066	1071	1090	1114	1137	1155	1167	1168	1152	1124							
55	940	928	923	928	947	971	995	1015	1029	1032	1016	985							
60	792	777	772	776	797	822	848	870	884	886	870	838							
65	640	621	614	618	639	667	696	718	733	736	719	687							
70	485	465	456	459	482	511	541	562	576	577	561	530							
75	334	312	302	304	328	358	388	407	418	419	404	375							
80	195	173	164	166	188	217	245	261	269	268	254	230							
85	79.4	61.9	54.0	55.8	73.9	96.7	119	131	137	136	125	107							
90	9.48	8.35	8.54	10.0	13.2	17.4	22.4	29.8	35.9	38.7	34.0	24.3							
95	11.0	10.9	11.0	11.3	12.0	12.8	13.6	14.0	14.2	14.0	13.4	12.4							
100	12.5	12.3	12.3	12.6	13.3	14.2	14.9	15.3	15.4	15.2	14.6	13.7							
105	14.1	13.7	13.6	13.8	14.6	15.5	16.3	16.6	16.5	16.3	15.8	15.0							
110	15.5	15.0	14.8	15.0	15.9	16.9	17.7	17.8	17.6	17.2	16.8	16.2							
115	16.9	16.3	16.1	16.2	17.1	18.2	19.0	19.0	18.7	18.2	17.9	17.4							
120	18.4	17.7	17.4	17.6	18.5	19.5	20.4	20.3	19.9	19.4	19.1	18.7							
125	20.0	19.2	18.8	18.9	19.8	20.9	21.8	21.6	21.1	20.6	20.3	20.1							
130	21.3	20.6	20.2	20.3	21.2	22.2	23.1	22.9	22.4	21.8	21.6	21.4							
135	22.6	21.9	21.7	21.8	22.6	23.5	24.2	24.1	23.7	23.2	22.9	22.7							
140	23.8	23.3	23.2	23.3	23.9	24.7	25.3	25.2	24.9	24.5	24.3	24.0							
145	25.1	24.7	24.6	24.7	25.2	25.9	26.4	26.4	26.2	25.9	25.6	25.4							
150	26.4	26.1	26.0	26.1	26.5	27.1	27.5	27.5	27.4	27.1	26.9	26.7							
155	27.8	27.6	27.5	27.5	27.8	28.2	28.6	28.6	28.5	28.4	28.2	28.1							
160	29.3	29.0	28.9	28.9	29.2	29.5	29.8	29.8	29.7	29.6	29.5	29.4							
165	30.9	30.5	30.2	30.1	30.4	30.7	30.9	30.8	30.7	30.5	30.6	30.7							
170	32.3	31.7	31.3	31.2	31.4	31.7	31.9	31.7	31.5	31.3	31.4	31.8							
175	32.8	32.3	32.0	31.9	32.1	32.4	32.6	32.3	31.9	31.6	31.8	32.2							
180	32.8	32.4	32.1	32.0	32.3	32.6	32.8	32.6	32.3	32.0	32.1	32.4							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: